


# PVM-2010QM

## SERVICE MANUAL

AEP Model  
UK Model

Chassis No. SCC-557A-A

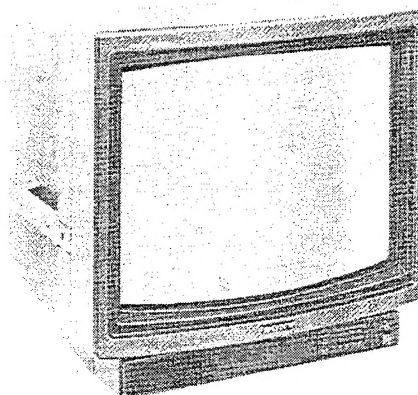

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel:- 01844-351694 Fax:- 01844-352554  
Email:- enquiries@mauritron.co.uk

April, 1984

### SPECIFICATIONS

Color system	PAL, SECAM, NTSC and NTSC4.43 systems, switched automatically	Outputs	Loop through VIDEO OUT: BNC connector AUDIO OUT: minijack EXT SYNC OUT: BNC connector RGB OUT: BNC connectors AUDIO (RGB) OUT: minijack
Picture tube	Trinitron tube Approx. 52 cm (20 inches) 100 degree deflection (Approx. 48 cm picture measured diagonally)	Audio output	1.5 W
Resolution	350 TV lines, 440 × 240 dots	Power requirement	220 – 240 V ac, 50/60 Hz
Color temperature	6,500°K/9,300°K	Power consumption	120 W (max.)
Frequency response	8 MHz (–3 dB, RGB) 6 MHz (–3 dB, composite video)	Dimensions	Approx. 486 × 463 × 539 mm (w/h/d) (19 1/4 × 18 1/4 × 21 1/4 inches)
Horizontal linearity	±5%	Weight	Approx. 29 kg (63 lbs 15 oz)
Vertical linearity	±5%	Optional accessories	Monitor stand SU-530 Monitor hood VF-500
Line pull range	Horizontal ±500 Hz Vertical 8 Hz		
Overscan of the picture	5%		
Return loss	4 MHz, 35 dB (LINE A, LINE B)		
Zooming	Within 2%		
Convergence	Central area 1 mm Outside of central area 1.3 mm		
Brightness	More than 50 foot-Lamberts		
Inputs	TUNER: 6-pin DIN connector VIDEO IN: BNC connector VTR: 8-pin connector (pins 2 and 6) Composite 1 V p-p ±6 dB, sync negative, 75 ohms and high impedance switchable AUDIO IN: minijack VTR: 8-pin connector (pins 1 and 5) –5 dBs high impedance EXT SYNC IN: BNC connector Composite sync 2 – 8 V p-p, negative, 75 ohms and high impedance switchable RGB IN: BNC connectors 0.7 V p-p, non composite AUDIO (RGB) IN: minijack –5 dBs high impedance		


While the information given is true at the time of printing, small production changes in the course of our company's policy of improvement through research and design might not necessarily be indicated in the specifications. We would ask you to check with your appointed Sony dealer if clarification on any point is required.



# TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
1. GENERAL		
1-1.	Features .....	4
1-2.	Precautions .....	4
1-3.	Location and Function of Parts and Controls .....	5
1-4.	System Connections .....	6
2. DISASSEMBLY		11
3. SETUP ADJUSTMENTS		
3-1.	Beam Landing .....	15
3-2.	Convergence .....	16
3-3.	Focus (RV713) .....	16
3-4.	White Balance .....	17
4. CIRCUIT ADJUSTMENTS		
4-1.	D Board Adjustments .....	18
4-2.	B Board Adjustments .....	21
4-3.	Q Board Adjustments .....	25
5. DIAGRAMS		
5-1.	Circuit Boards Location .....	29
5-2.	Block Diagram .....	29
5-3.	Semiconductors .....	32
5-4.	Schematic Diagram .....	33
5-5.	Printed Wiring Boards .....	41
5-6.	Waveforms .....	50
6. EXPLODED VIEWS		
1.	Cabinet Ass'y .....	54
2.	Chassis Ass'y .....	55
3.	Bezel Ass'y .....	56
7. ELECTRICAL PARTS LIST		57

## SAFETY-RELATED COMPONENT WARNING !!

COMPONENTS IDENTIFIED BY SHADING AND MARK  ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL TO SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

CMPTR : 25-pin D connector

Pin No.	Signal	Signal level
1	IBM select	High state (5 V) : IBM mode Low state : 3 Bit TTL
2	Audio select	High state (5 V or open) : audio inputs from the CMPTR connector Low state (less than 0.4 V) : audio inputs from the LINE A AUDIO IN jack
3	H. sync or composite sync	Negative polarity (1) 1 V p-p, 75Ω terminated (2) TTL level •(1) or (2) is selected by the pin 9.
4	Blue input	Positive polarity (1) Analog signal (0.7 V p-p, 75Ω terminated, non sync) (2) Digital signal (TTL level) •(1) or (2) is selected by the pin 9.
5	Green input	
6	Red input	
7	+ 12 V power supply	
8	+ 5 V power supply	
9	Analog/digital mode select	High state (open) : Analog signal (0.7 V p-p) Low state (ground) : Digital signal (TTL level)
10	RGB/NORMAL mode select	High state (5 V or open) : RGB inputs from the microcomputer Low state (ground) : composite video inputs from the LINE A VIDEO IN connector
11	V-sync	Negative polarity TTL level
12	Blanking	High state (5 V or open) : video inputs from the microcomputer Low state (ground) : Superimposed signal of composite video inputs from the LINE A VIDEO IN connector and the RGB inputs from the microcomputer

CMPTR : 25-pin D connector

Pin No.	Signal	Signal level
13	Audio input	Input level -5 dB (100% modulation), input impedance more than 47 kΩ
14	EXT/INT mode sync switch	High state (open) : microcomputer sync Low state : LINE A sync
15   24	ground	
25	IBM luminance signal	•Positive polarity, TTL level when the high state is selected at the pin 1. •Set to the low state (ground) when the low state is selected at the pin 1.

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel:- 01844-351694 Fax:- 01844-352554  
Email:- enquiries@mauriron.co.uk

## SECTION 1 GENERAL

### 1-1. FEATURES

- The PAL, SECAM, NTSC or NTSC4.43\* color system is selected automatically.
- Colorpure Filter: Fine picture detail without color spill or color noise can be obtained by setting the COMB FILTER select switch to COMB.
- Automatic Frequency Control: The horizontal AFC time constant is selected by setting this switch to either the fast or slow mode.
- LINE A/LINE B/VTR/RGB/CMPTR: Selects the inputs.
- TUNER: Permits connection of the special color TV tuner with a single connecting cable.
- Superimposed Picture: When utilizing the SMI-7073 superimposer (optional) and a microcomputer, the pictures from a videodisc player and a microcomputer can be superimposed.

\* A signal of NTSC4.43 system is obtained by playing back NTSC-recorded video tapes with a video tape recorder/player specially designed for use with this system.

### 1-2. PRECAUTIONS

#### On safety


- Check that the operating voltage of your unit is identical with the voltage of your local power supply.
- Should any liquid or solid object fall into the cabinet, unplug the unit and have it checked by qualified personnel before operating it any further.
- Unplug the unit from the wall outlet if it is not to be used for several days.
- To disconnect the ac power cord, pull it out by the plug. Never pull the cord itself.

#### On installation

- Allow adequate air circulation to prevent internal heat build-up. Do not place the unit on surfaces (rugs, blankets, etc.) or near materials (curtains, draperies) that may block the ventilation holes.
- Do not install the unit in a location near heat sources such as radiators or air ducts, or in a place subject to direct sunlight, excessive dust, mechanical vibration or shock.

#### On cleaning

- To keep the unit looking brand-new, periodically clean it with a soft cloth. Stubborn stains may be removed with a cloth lightly dampened with a mild detergent solution. Never use strong solvents such as thinner or benzine, or abrasive cleansers since these will damage the cabinet. As a safety precaution, unplug the unit before cleaning it.
- To clean the screen, the frame and the screen shield may be removed as follows.

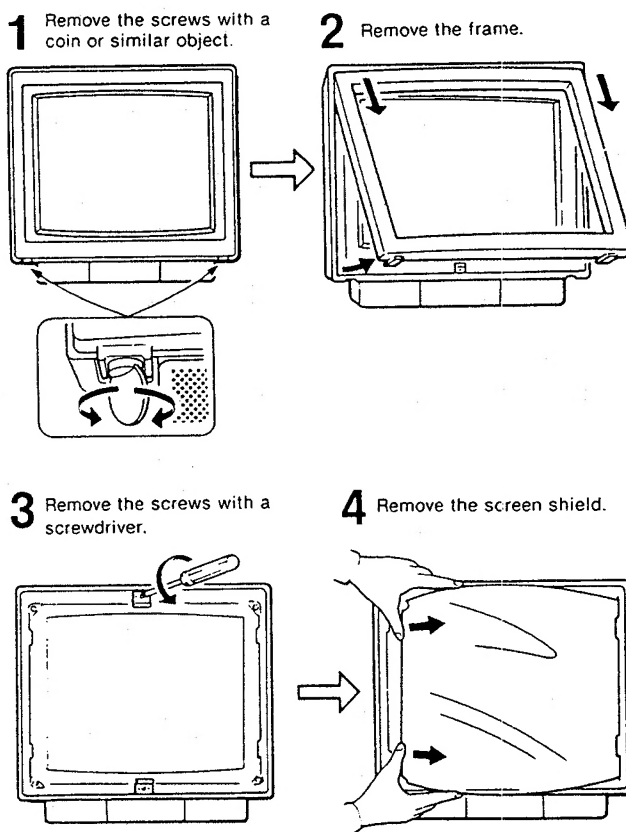


#### On repacking

Do not throw away the carton and packing materials. They make an ideal container in which to transport the unit. When shipping the unit to another location, repack it as illustrated on the carton.

If you have any questions about this unit, contact your Sony service facility.



### 1-3. LOCATION AND FUNCTION OF PARTS AND CONTROLS

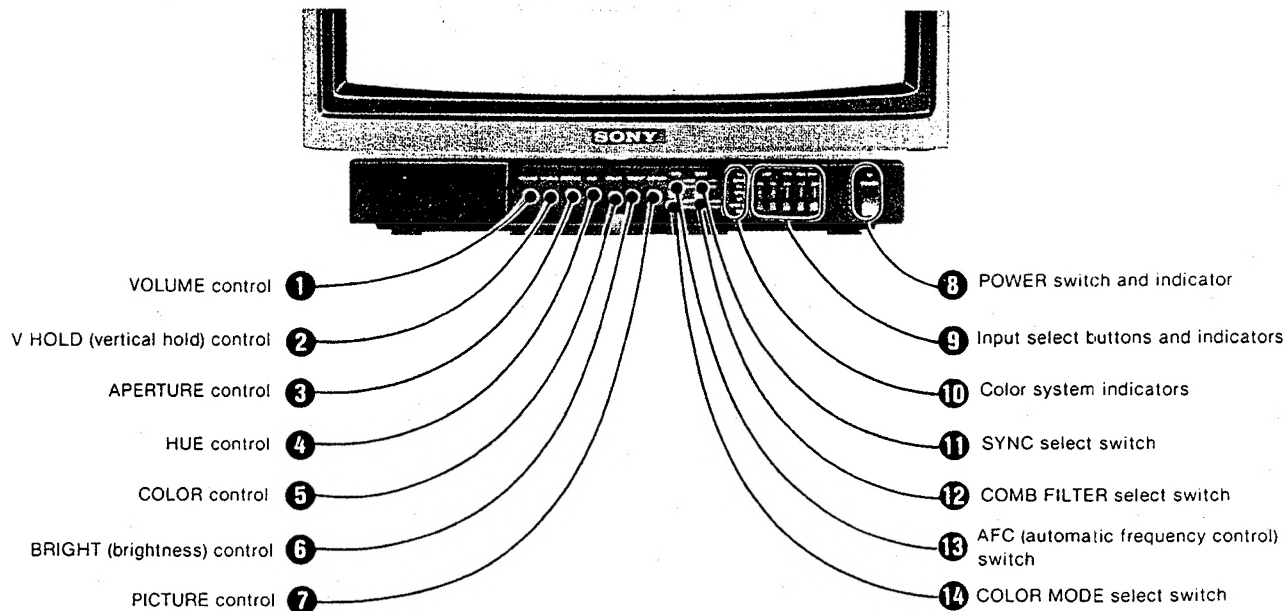

**On the top : Color temperature selector**

This selector is set to 9,300°K at the factory. If necessary, set to 6,500°K with a minus screwdriver.

**1 VOLUME control**

Turn this control clockwise or counterclockwise to obtain the desired volume.

**2 V HOLD (vertical hold) control**

If the picture rolls vertically, correct it with this control.

**3 APERTURE control**

Adjusts the sharpness of the picture.

When the control is turned all the way to the left, the picture will have normal control. If reception conditions result in a snowy picture, better results will be obtained with a softer picture.

**4 HUE control**

This control is effective only for the NTSC or NTSC4.43 system.

Use to obtain the most natural skin tones. Clockwise rotation makes the skin tones greenish; counterclockwise rotation makes them purplish.

**5 COLOR control**

Adjusts the color intensity of the picture. Clockwise rotation makes the picture vivid; counterclockwise rotation makes it pale.

**6 BRIGHT (brightness) control**

Adjusts the brightness. Normally set this control at the center detent position.

**7 PICTURE control**

Adjusts the contrast, color intensity and brightness simultaneously in the proper ratio.

**8 POWER switch and indicator**

To turn the monitor on, depress the POWER switch. The indicator will light. To turn the monitor off, press the switch again.

**9 Input selector buttons and indicators**

Press to select the program to be monitored.

LINE A: for a signal from the LINE A (VIDEO/AUDIO or TUNER) connectors.

LINE B: for a signal from the LINE B connectors.

VTR: for a signal from the 8-pin VTR connector.

RGB: for a signal from the R, G, B and AUDIO (RGB) connectors.

CMPTTR: for a signal from the 25-pin CMPTTR connector.

When an input select button is pressed, the indicator above the button will light up.

**10 Color system indicators**

Indicate the color system of the playback of the VTR.

**11 SYNC select switch**

Sync may be supplied from an external sync generator to the EXT SYNC IN connector on the rear panel. When an external SYNC is supplied with either composite or non-composite video input, release the SYNC SELECT switch (EXT). When composite video is supplied without external sync, depress the SYNC select switch (INT).

**12 COMB FILTER select switch**

Keep this switch depressed (COMB) during normal use to obtain fine picture detail without color spill or color noise. When a microcomputer, such as the APPLE II, is connected and stripes appear, release this switch (TRAP).

**13 AFC (automatic frequency control) switch**

Select the AFC operation in the fast mode or slow mode.

FAST: incoming sync timing errors are compensated for.

SLOW: incoming sync timing errors are displayed on the screen.


This mode is used to monitor the jitter from the VTR.

**14 COLOR MODE select switch**

Usually keep this switch depressed to select the color system automatically. Release this switch when the picture receiving SECAM color sources is distorted. The picture will become clear.

## 1-4. SYSTEM CONNECTION

### CONNECTORS FOR VIDEO/AUDIO/MICROCOMPUTER

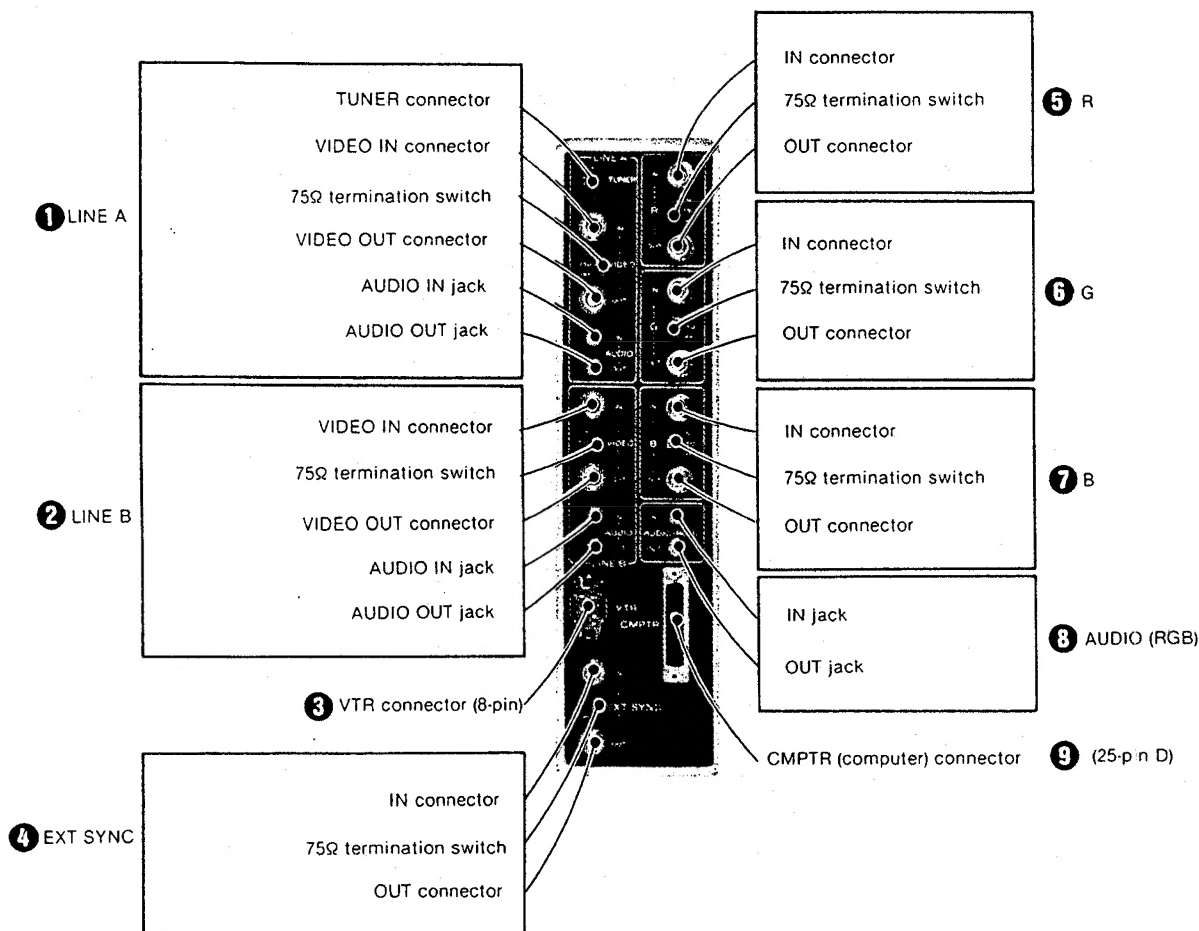

#### 1 LINE A 2 LINE B

Press the LINE A or LINE B input select button to monitor the signal.

#### TUNER connector (BNC)

Connect to the output connector on the special color TV tuner with the connecting cable supplied with the tuner. The video and audio signals and power can be connected simultaneously with this cable. When the tuner is connected to this connector, the VIDEO IN/OUT connectors and the AUDIO IN/OUT connectors of LINE A cannot be used. Press the LINE A input select switch to monitor the signal from a color TV tuner.

#### VIDEO IN connectors (BNC)

Connect to the video output of a video tape recorder or another monitor (for loop through connection), or to a color camera.

#### 75Ω termination switches

When only one monitor is used, set the switch to ON. When several monitors are connected, set the switch of the last monitor in the looped chain to ON and set it to OFF on the other monitors.

#### VIDEO OUT connectors (BNC)

Connect to the video input of another monitor or a video tape recorder.

#### AUDIO IN jacks (minijack)

Connect to the audio output of a video tape recorder or another monitor (for loop through connection), or to a microphone using a suitable microphone amplifier.

#### AUDIO OUT jacks (minijack)

Connect to the audio input of another monitor or a video tape recorder.

#### 3 VTR connector (8-pin)

Connect to a video tape recorder equipped with an 8-pin connector. For monitoring, press the VTR input select button. For connection, use the optional video cable, VMC-3P(3 m), -5P(5 m), -10P(10 m), -25P(25 m) or -50P(50 m).

#### 4 EXT SYNC

##### IN connector (BNC)

Connect to an external sync generator.

##### 75Ω termination switch

When equipment is connected to the EXT SYNC OUT connector, set the switch to OFF. When nothing is connected, set to ON.

##### OUT connector (BNC)

Supplies the external sync signal from the external sync generator connected to the EXT SYNC IN connector.

**5 R 6 G 7 B****IN connectors (BNC)**

Allow a character generator, microcomputer or video camera having analog RGB outputs to be connected. Press the RGB input select button to monitor the signal.

**75Ω termination switches**

When only one monitor is used, set the switch to ON. When several monitors are connected, set the switch of the last monitor in the looped chain to ON and set it to OFF on the other monitors.

**OUT connectors (BNC)**

Connect to the analog RGB inputs of another monitor.

**① AUDIO (RGB)****IN jack (minijack)**

Connect to the audio output of the equipment connected to the RGB IN connectors. Press the RGB input select button to monitor the signal.

**OUT jack (minijack)**

Connect to the RGB audio input of another monitor.


**② CMPTR (computer) connector (25-pin D)**

Connect to a microcomputer with digital or analog RGB outputs. Press the CMPTR input select button to monitor the signal.

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: [enquiries@mauritron.co.uk](mailto:enquiries@mauritron.co.uk)


# PVM-2010QM

## CONNECTING A COLOR TV TUNER

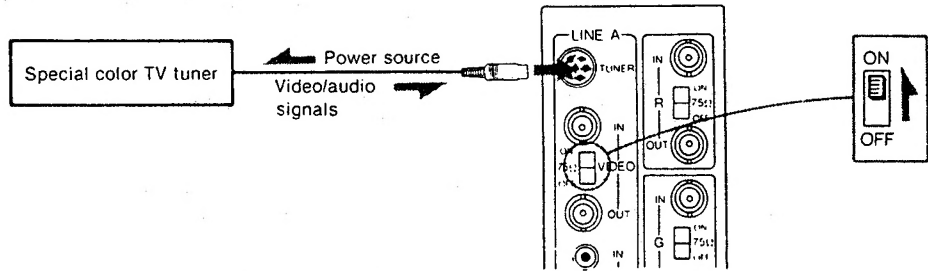


## CONNECTING A VIDEO TAPE RECORDER

**Note**  
When monitoring the picture at fast speed, the picture may roll vertically or become monochrome.

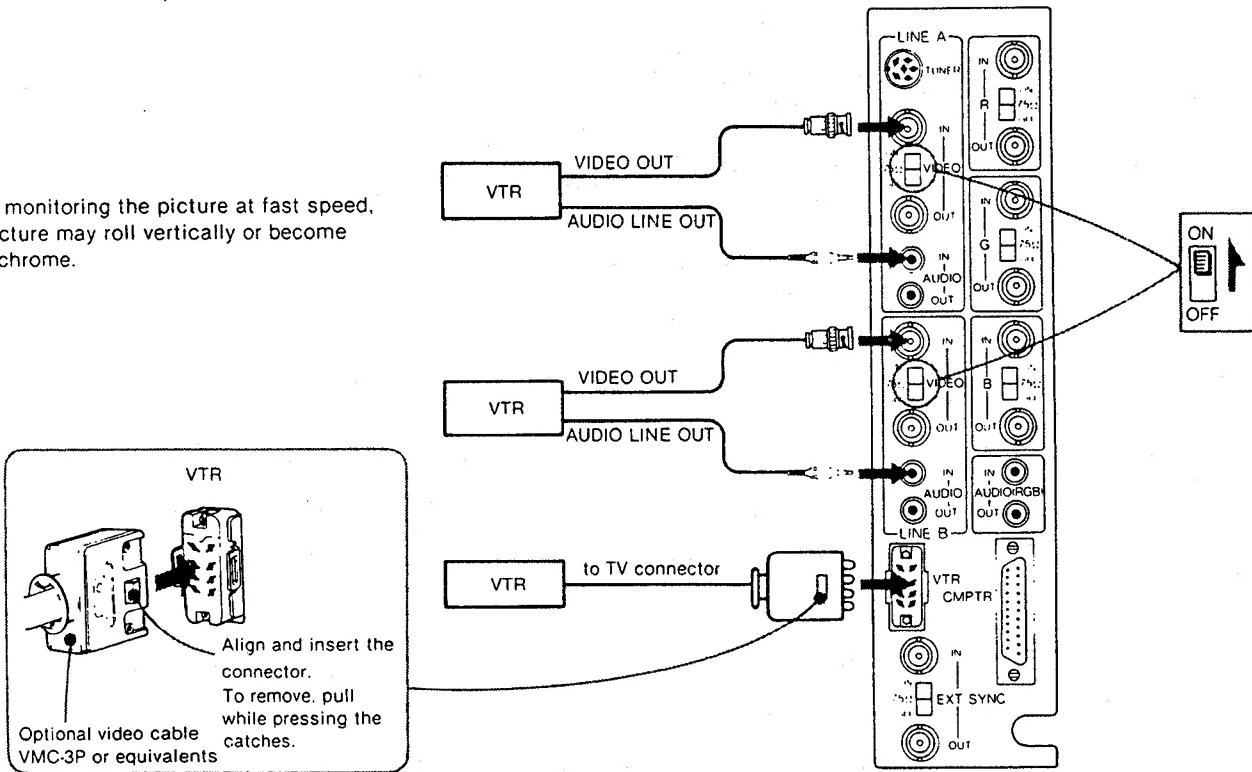


## CONNECTING A VIDEO CAMERA

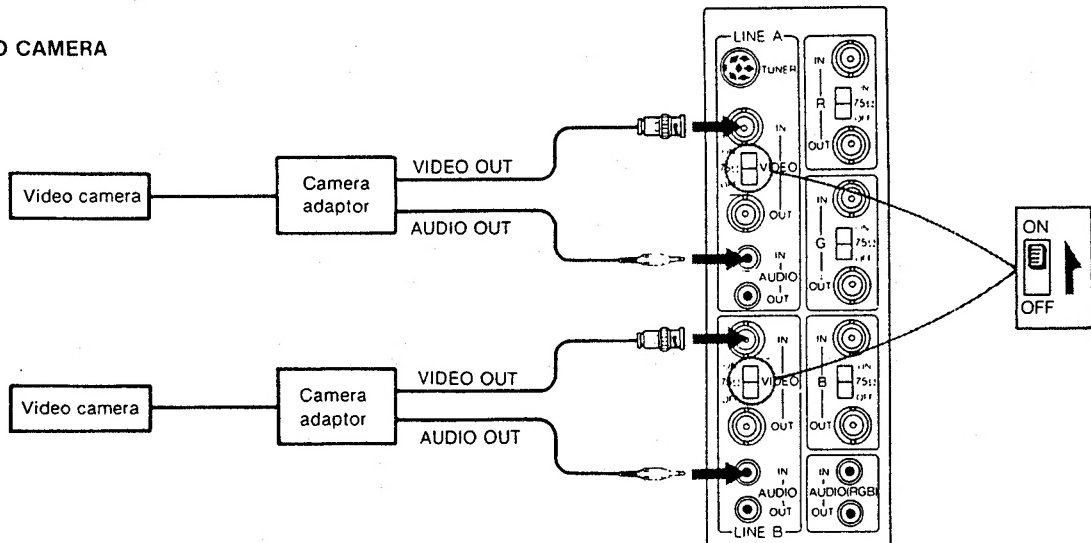

## MULTIPLE MONITOR CONNECTION

Up to 10 monitors may be connected. Set the 75Ω termination switch of the last monitor to ON and that of the other monitors to OFF.


The LINE A or LINE B input select button on each monitor should be pushed in.

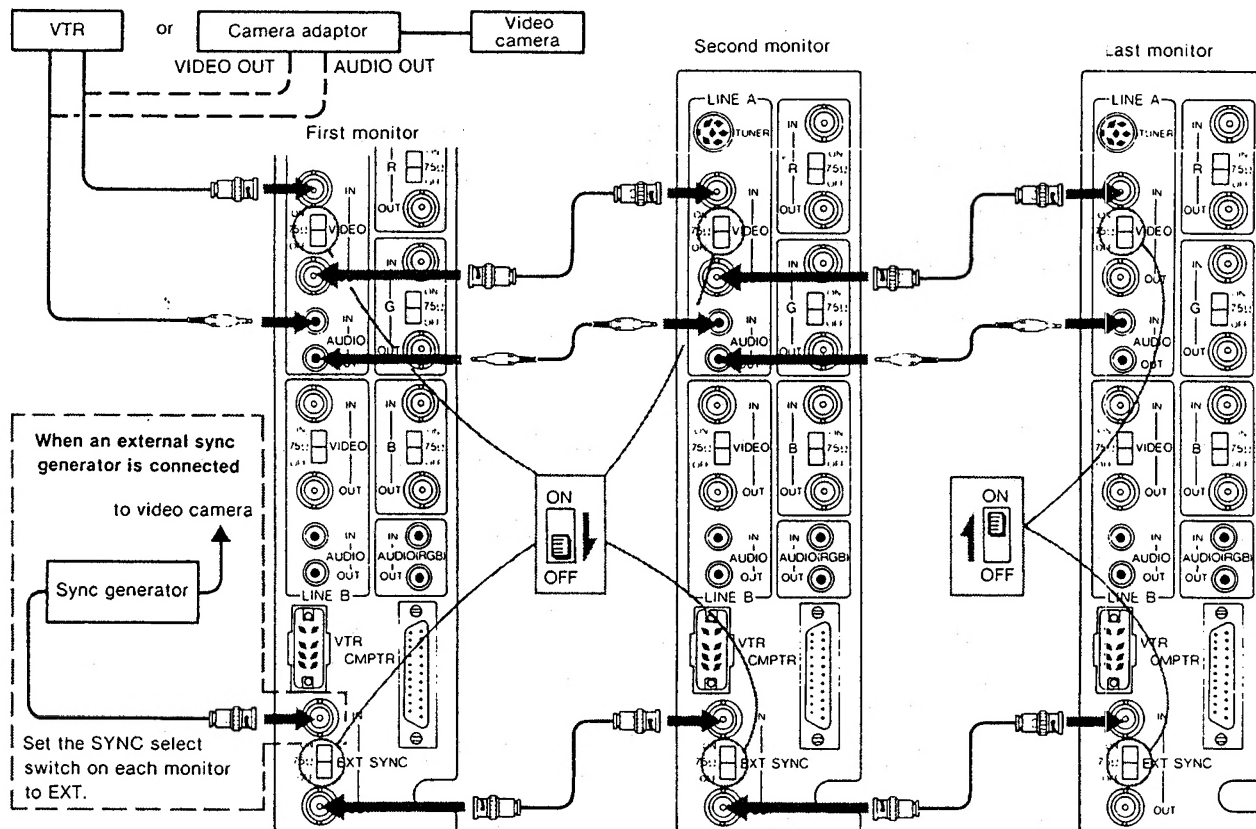

## CONNECTING A MICROCOMPUTER

The CMPTR connector allows a microcomputer with digital or analog RGB outputs to be connected. The R, G and B IN connectors

allow a microcomputer with analog RGB outputs to be connected.

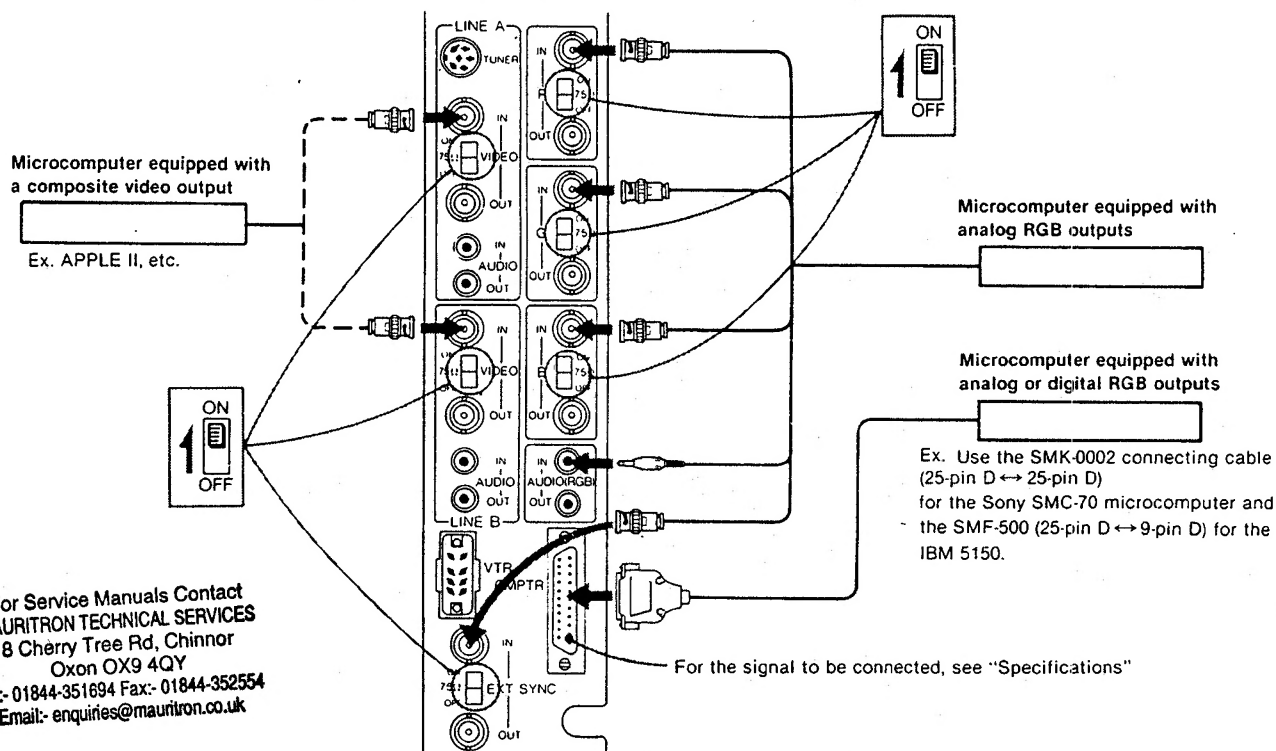

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauratron.co.uk


For the signal to be connected, see "Specifications"

(BLANK - PAGE)


## SECTION 2 DISASSEMBLY

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinner  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauritron.co.uk


### (1) CABINET ASS'Y AND PICTURE TUBE REMOVAL

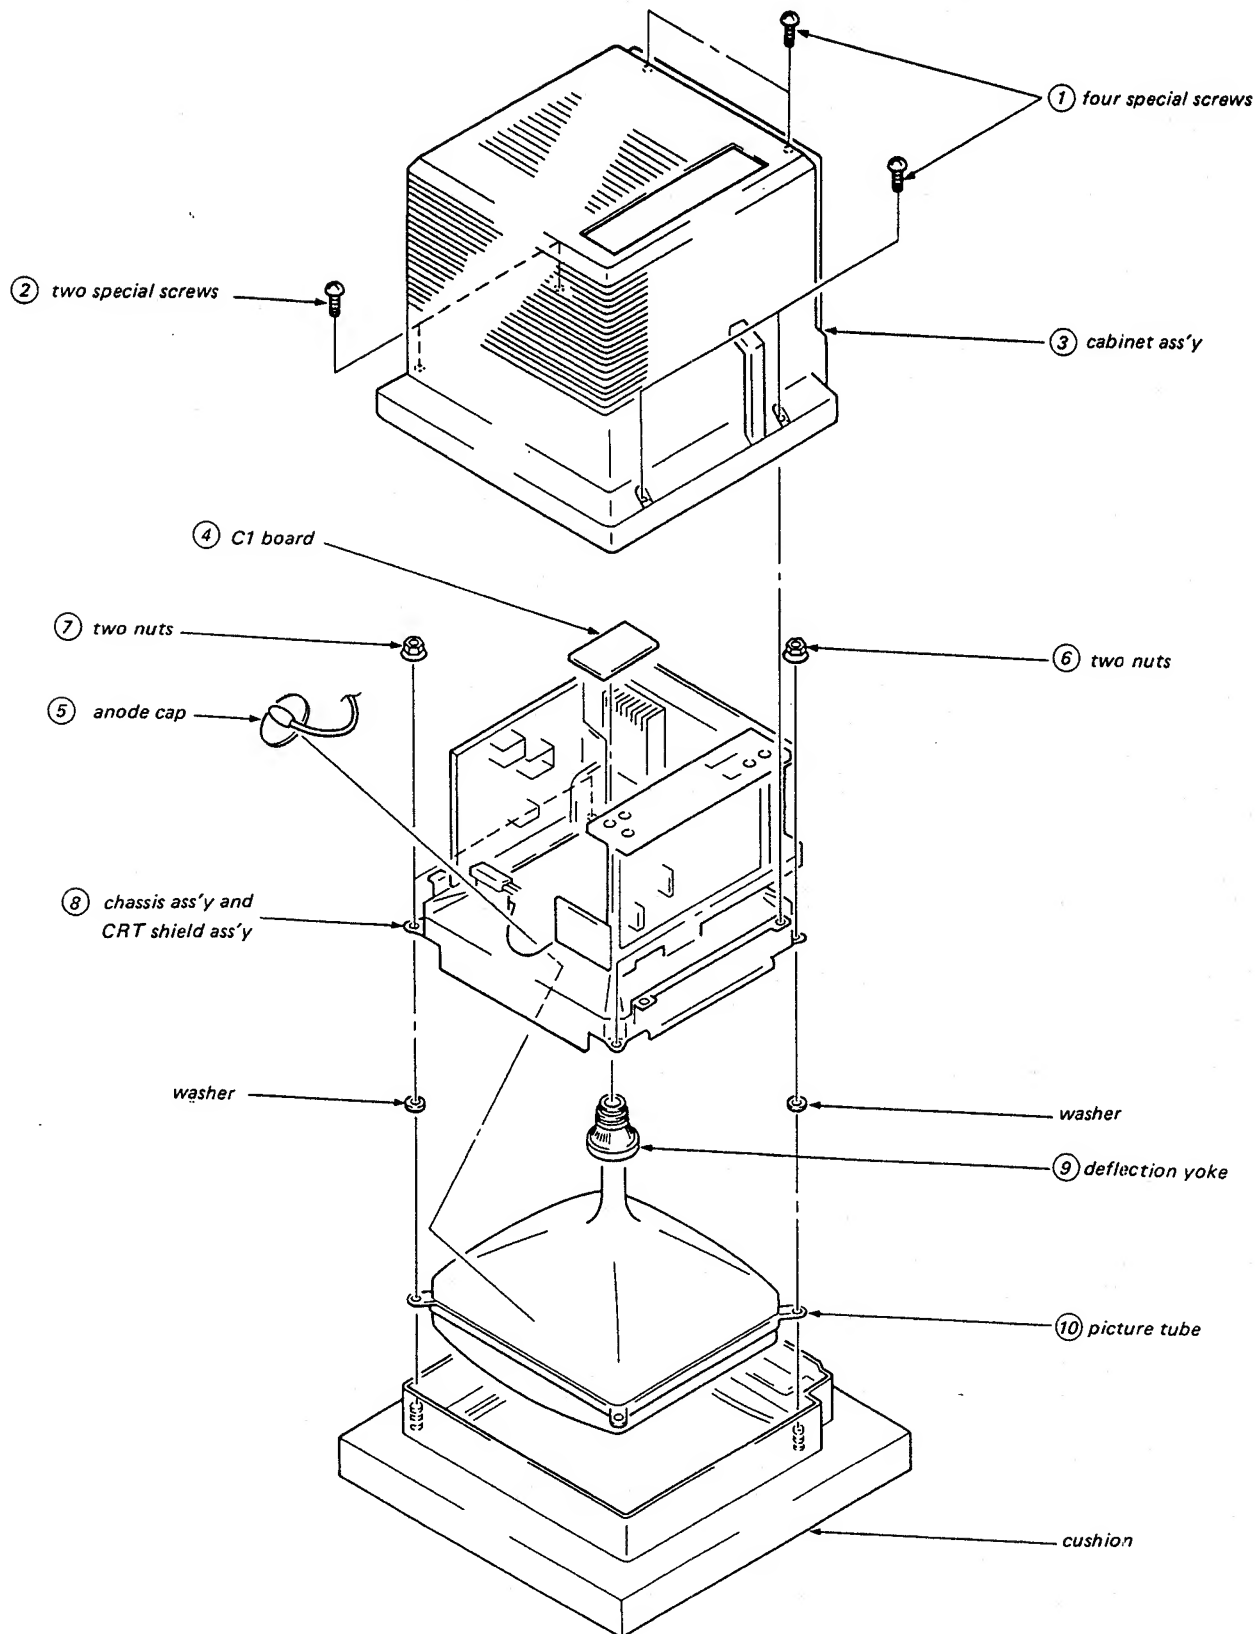

## (2) FOR CHECKING B AND Q BOARD UP

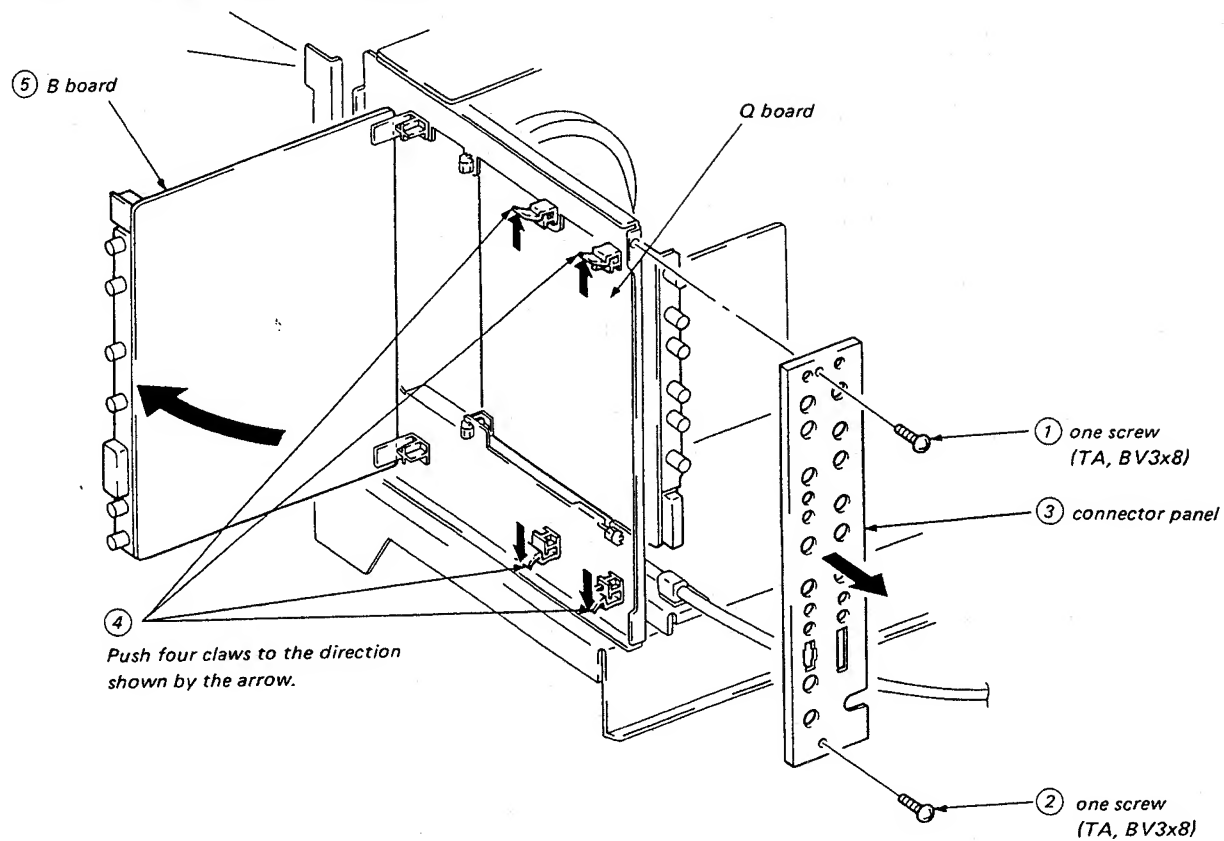


## (3) F BOARD REMOVAL

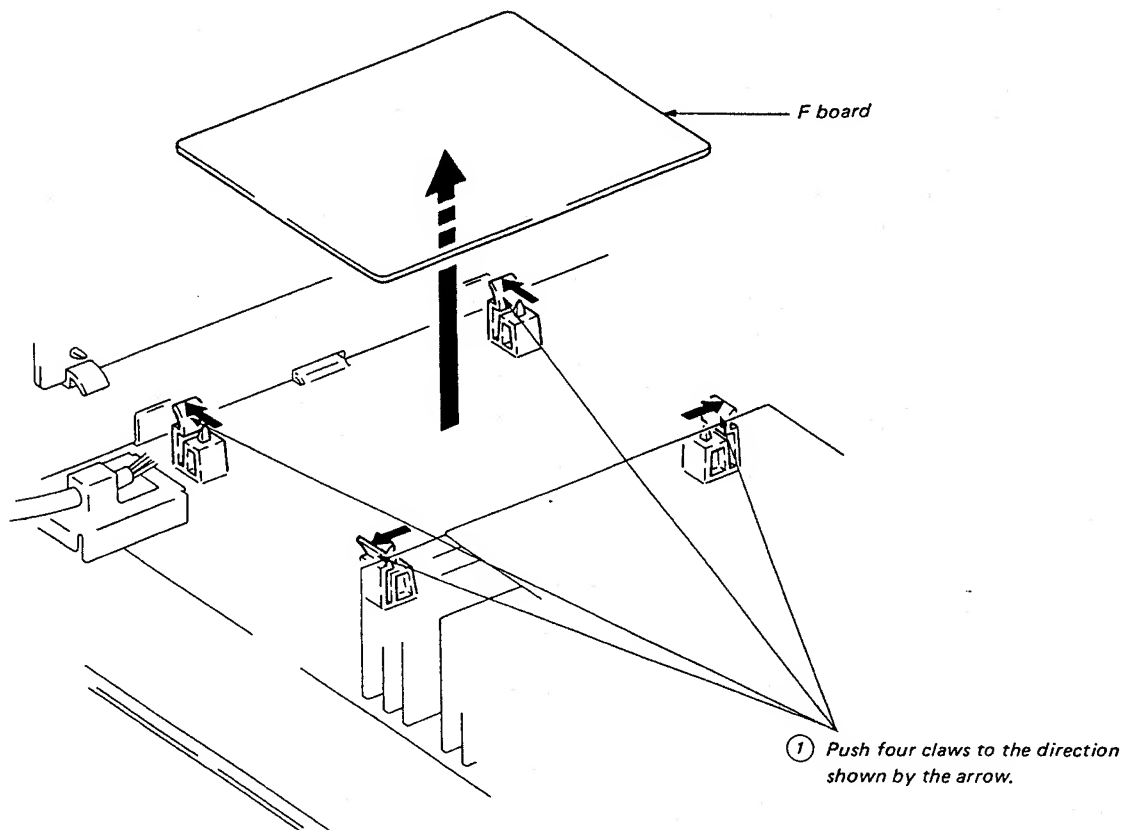





(4) SWITCHING REGULATOR REMOVAL ... (1)

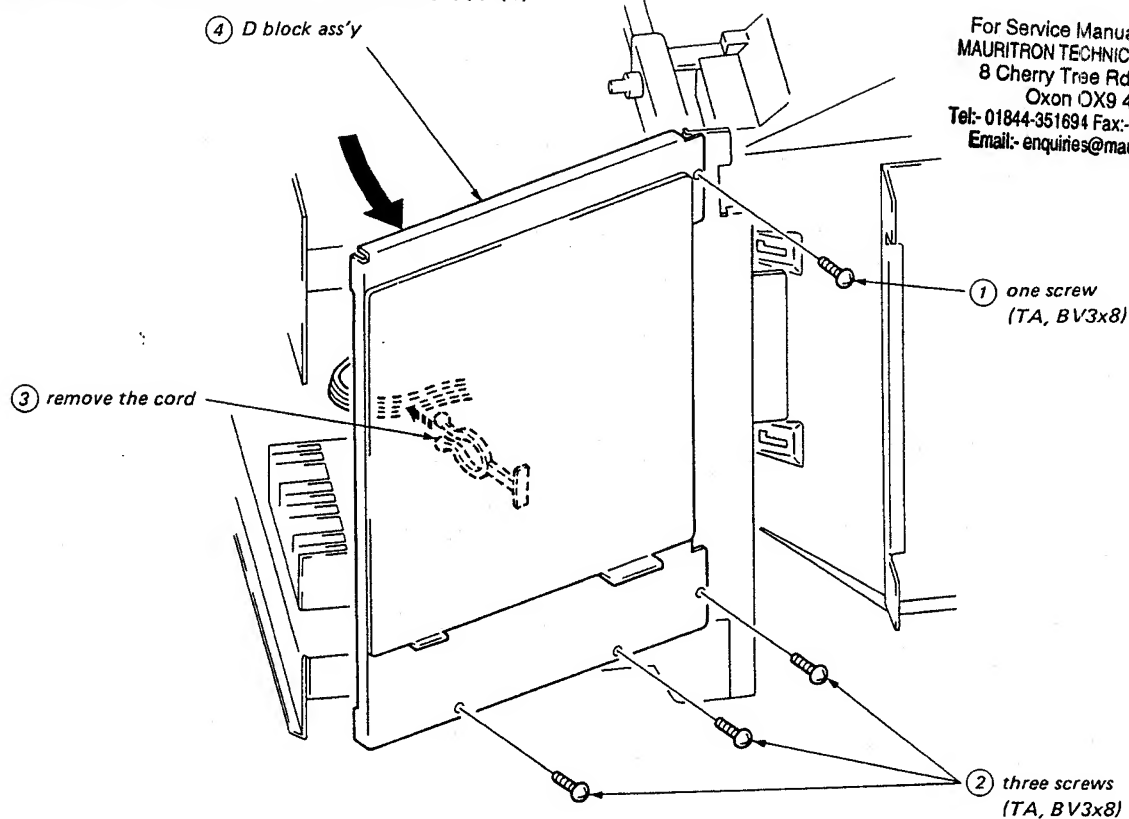

(5) SWITCHING REGULATOR REMOVAL ... (2)

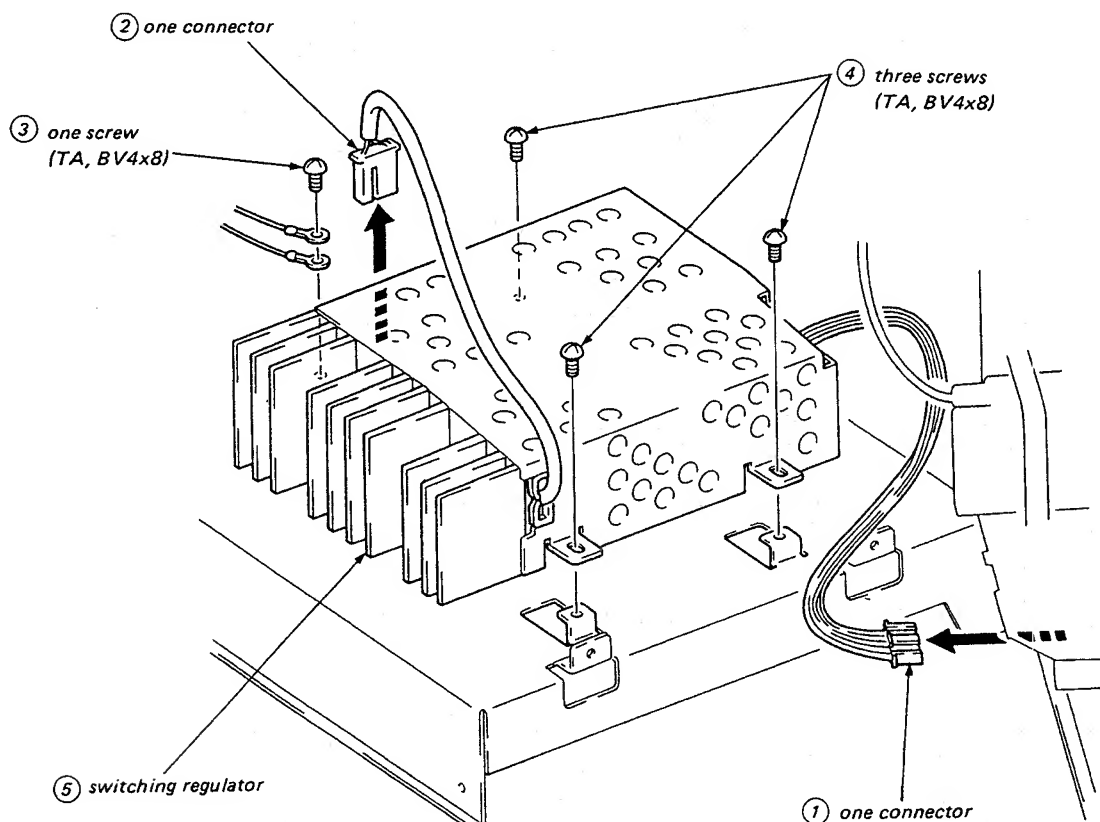

(6) H BOARD REMOVAL

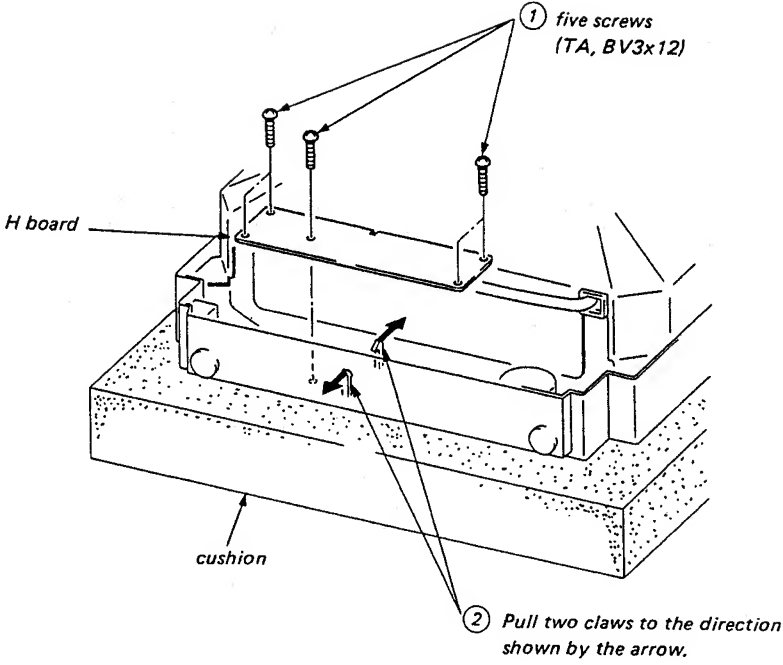

# SECTION 3

## SETUP ADJUSTMENTS

### 3-1. BEAM LANDING

Landing Adjustment In the case of a 6,500°K color temperature, the number of VRs to be adjusted will differ.

- (1) Turn on set power supply and receive and all-white signal.
- (2) Evenly degauss the entire screen.
- (3) Loosen the deflection yoke mounting screw, and set the purity control to the center as shown in Fig. 1-1.
- (4) Set BKG volume RV708 (G) to maximum and set RV712 (B) and RV704 (R) to minimum.
- (5) Move the deflection yoke back, and adjust the purity control so that (G) is in the center and (R) and (B) are at the sides, evenly. (Fig. 1-2)
- (6) Move the deflection yoke forward so that the entire screen is G.
- (7) \* If the deflection yoke is pushed all the way to the CRT then moved slightly back, landing adjustment is easier.
- (8) Substitute (R), then (B) for (G) in step (4) and check landing.
- (9) Rotate (R), (G) and (B) once each and check landing.
- (10) When landing is not right, adjust the purity control and use magnets as shown in Fig. 1-3, then repeat steps (7) and (8).
- (11) When a magnet is used, be sure to perform step (2), and tighten deflection yoke mounting screw loosely.




Fig. 1-1.




Fig. 1-2.


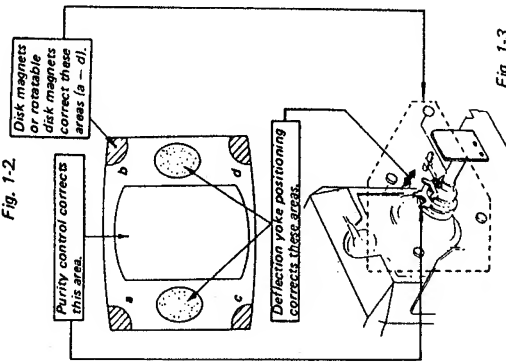


Fig. 1-3.

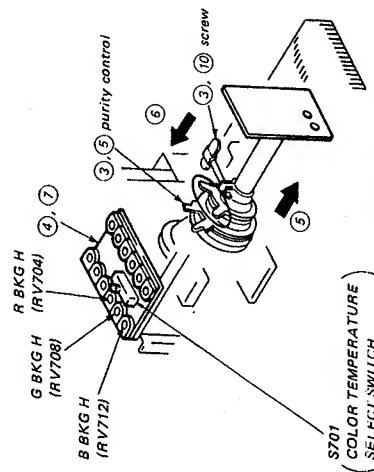




Note: The circled numbers (3)-(7) and (10) shown above steps.

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauratron.co.uk

### 3-2. CONVERGENCE

#### Preparation:

- Before starting, perform FOCUS, H.SIZE, V.SIZE and V.LIN adjustments.
- Set BRIGHTNESS control to fully counterclockwise.
- Feed in the dot pattern.

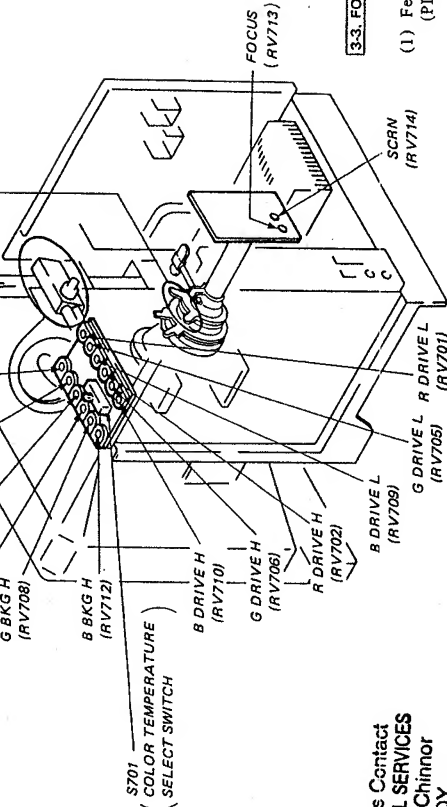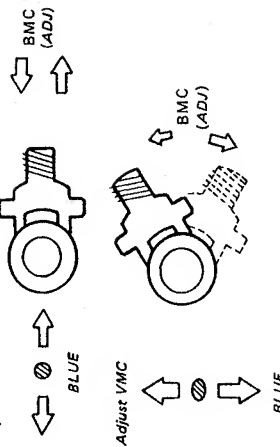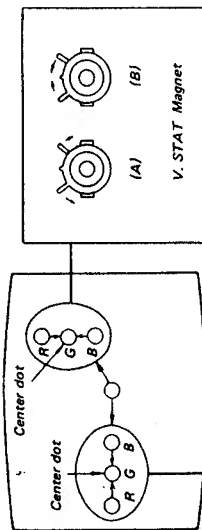

### 3-3. FOCUS (RV713)


- (1) Feed in monoscope signal, (PICTURE: 80%, BRIGHT: 50%)
- (2) Adjust RV713 for best focus.

## (2) Dynamic Convergence Adjustment

### Preparation:

- Before starting, perform Horizontal and Vertical Static Convergence Adjustment.

1. Loosen deflection yoke screw.
2. Remove deflection yoke spacers.
3. Move the deflection yoke for best convergence as shown below.
4. Tighten the deflection yoke screw.
5. Install the deflection yoke spacers.

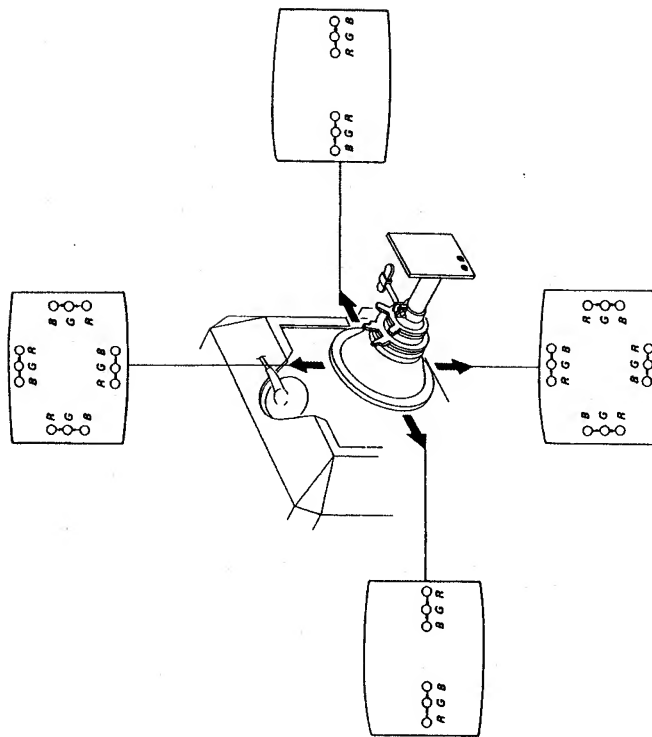

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel: 01844-351694 Fax: 01844-352554  
 Email: enquiries@mauratron.co.uk

## 3-4. WHITE BALANCE

(For 9,300° K Color Temperature:)

- (1) Receive a totally white signal from the pattern generator.
- (2) Set BRIGHT at 50%, PICTURE at 80%, the various BKG VRs (RV704, 708, and 712) at 50%, and the various DRIVE VRsH (RV702, 706, and 710) at 80%.
- (3) Turn all the other BKG VRs than the one for the color that started glowing first, and adjust the white balance at cut-off.
- (4) Adjust the high light side white balance with drive VRs.

- (5) By turning other drive VRs than the one for the color glowing the brightest of all, adjust the white balance. Repeat operating steps (3) and (4).

(For 6,500° K Color Temperature:)

- (1) By turning BKG VRs (RV703, 707, and 711) and drive VRs (RV701, 705, and 709), make the same adjustment as in the 9,300° K color temperature mode.


\* After white balance adjustment, set the black level to screen (picture frame) with RV109.

# SECTION 4 CIRCUIT ADJUSTMENTS

## 4-1. D BOARD ADJUSTMENTS

### Horizontal Oscillator Frequency Adjustment

- (1) Receive a monoscope signal.
- (2) Set PIC VR at 80% and BRT VR at 50%, and connect for an external sync.
- (3) Ground the Q502 base.
- (4) Turn H FREQ VR (RV504), and adjust for the image to stop flowing.



### Horizontal Deflection Block Adjustment

- (1) Receive a monoscope signal.
- (2) Set BRIGHT at 80% and BRIGHT at 50%.
- (3) Turn H PHASE VR (RV505), verify that the H center will shift accordingly, and turn the VR to the extreme clockwise position.
- (4) Turn H CENT VR (RV506), and verify that the H center will shift accordingly.
- (5) Turn the HLC (LS05) core for the picture size to be maximized.
- (6) Adjust H SIZE VR (RV801) for the H size at screen center to be made 16 frames.


### PIN PHASE ADJUSTMENT


Adjust RV802 to make vertical lines straight as shown.



### PIN AMP ADJUSTMENT

Adjust RV803 to make vertical lines straight as shown.

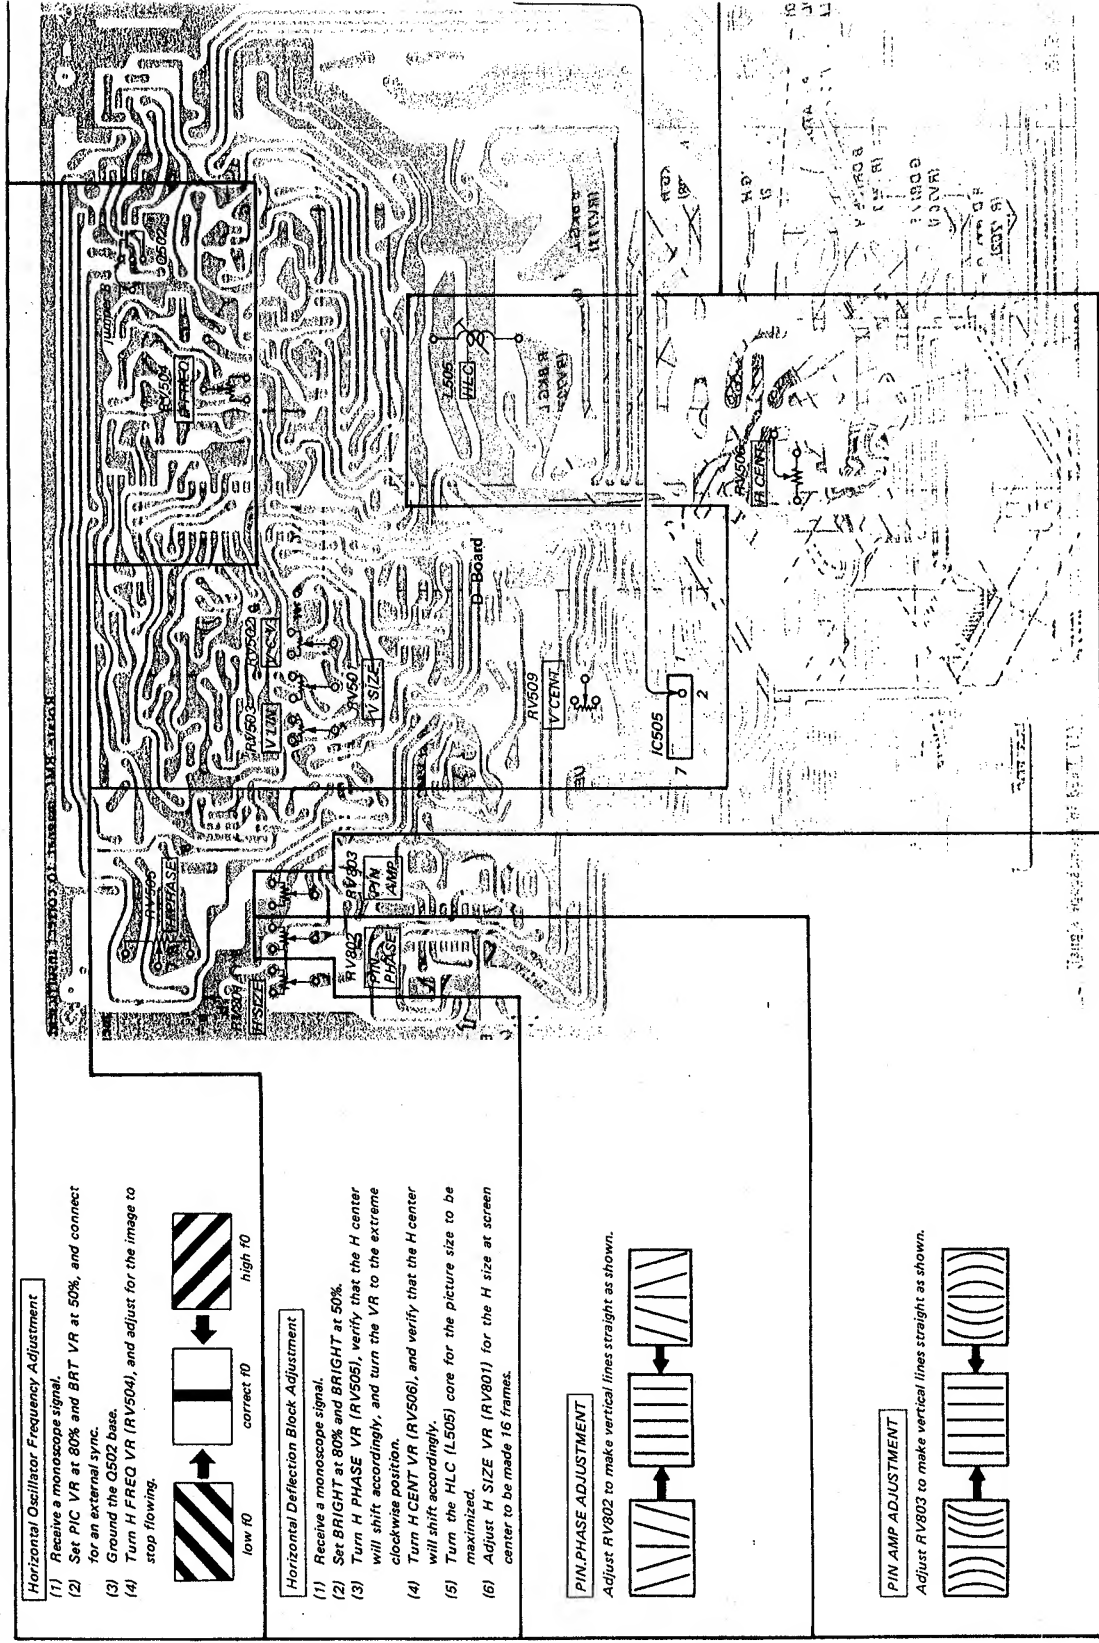

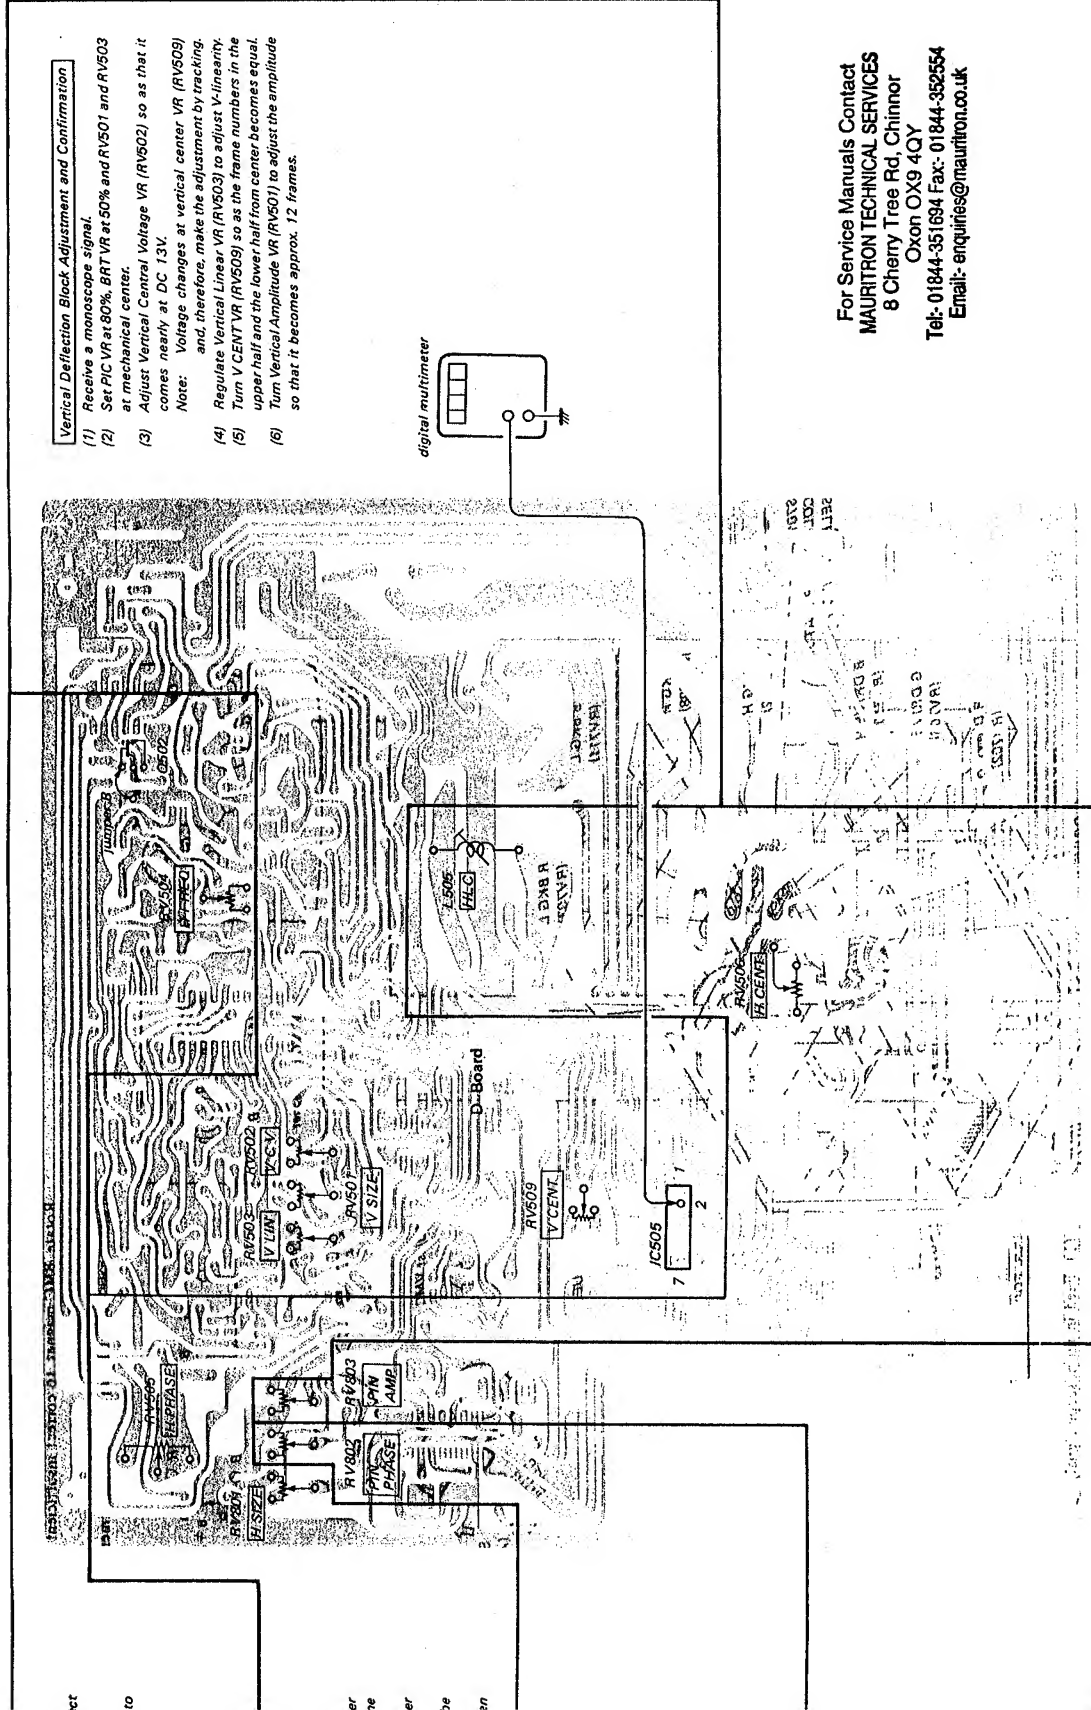

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@maurifron.co.uk

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel: 01844-351694 Fax: 01844-352554  
 Email: enquiries@mauritron.co.uk

#### ANTI-PAL, LINE CRAWLING Adjustment

- (1) Anti-PAL Adjustment
  - 1) Input a special color bar.
  - 2) PICTURE 80%  
COLOR 50%  
BRT 50%
- 3) Confirm that there is no color on the first anti-PAL signal frames at the right and left of the picture. If there is, adjust to remove the anti-PAL color at both sides while tracking with RV103 (HUE CENT) and RV110 (DELAY ADJ.).

#### (2) Line Crawling Adjustment

- 1) Input a PAL color bar.
- 2) Adjust T104 (DAT) for minimum line crawling.
- 3) Confirm the anti-PAL adjustment in (1), and repeat (2) and (1), if necessary.

#### APC Adjustment


- (1) 4.43 (APC-2) Adjustment
  - 1) Input a PAL color bar.
  - 2) Connect a 100K $\Omega$  resistor between RV105 pin ③ and ground. (Killer circuit goes off.)
  - 3) Connect IC104 pin ③ to +8 via the 2.2K $\Omega$  resistor to get 4.43 mode.
  - 4) Ground IC103 pin ⑥ with a 10 $\mu$ /16V chemical capacitor and remove color sync.
  - 5) Adjust RV105 (APC-2) to get color sync.

#### (2) 3.58 (APC-1) Adjustment

- 1) Input a NTSC color bar.
- 2) Connect a 100K $\Omega$  resistor between RV105 pin ③ and ground. (Killer circuit goes off.)
- 3) Ground IC103 pin ⑥ with a 10 $\mu$ /16V chemical capacitor and remove color sync.
- 4) Ground Q139 base momentarily to get 3.58 mode.
- 5) Adjust RV104 (APC-1) to get color sync.



#### CHROMA TRAP Adjustment


- (1) 4.43 Trap Adjustment
  - 1) Input a PAL color bar.
  - 2) Observe IC103 pin ⑤ waveform on the oscilloscope and adjust T103 for minimum chrome component.
- (2) SECAM Trap Adjustment
  - 1) Input a SECAM color bar.
  - 2) Observe IC103 pin ⑤ waveform on the oscilloscope and adjust T102 for minimum chrome component.

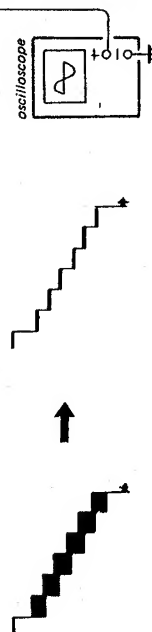

#### COMB FILTER Adjustment

- (1) 1H Delay Adjustment
  - 1) Input a NTSC color bar.
  - 2) Observe the IC201 Pin ③ waveform on the oscilloscope, and adjust so that the chroma component is minimum while tracking with RV101 and T101.

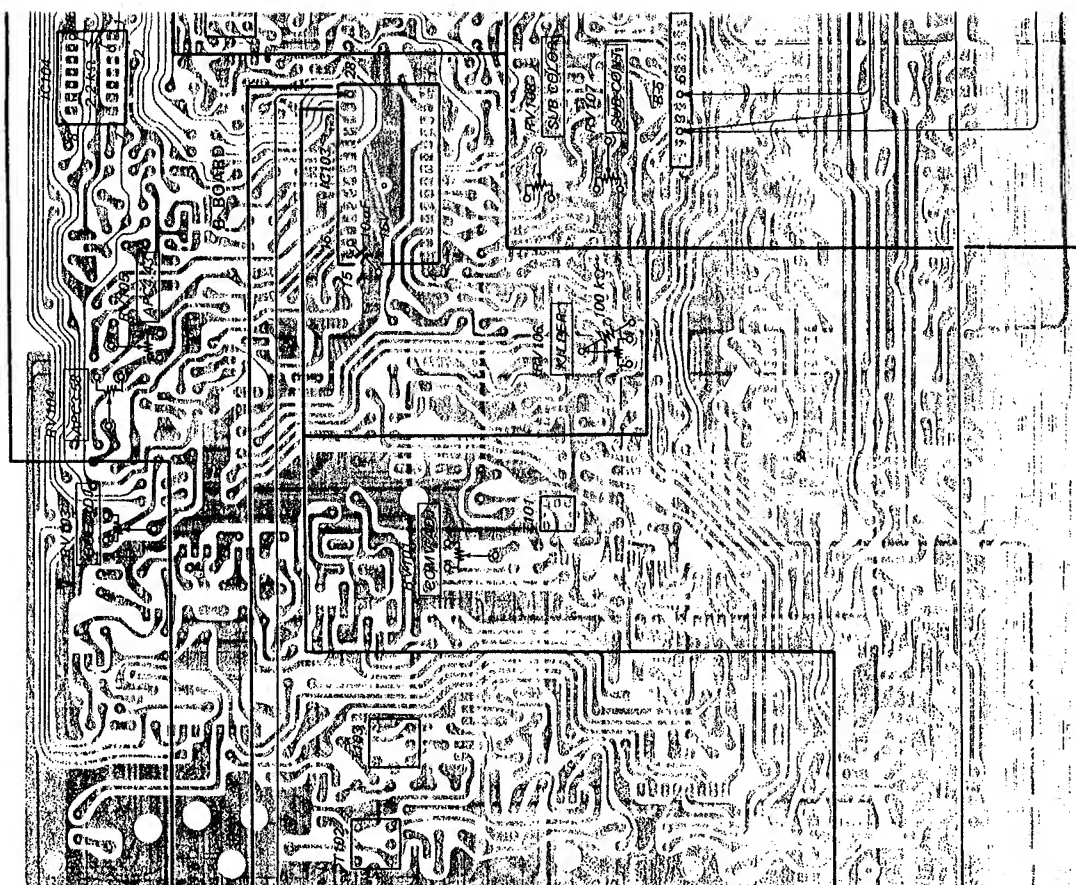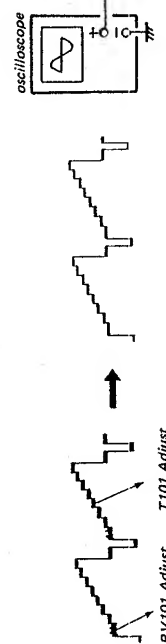


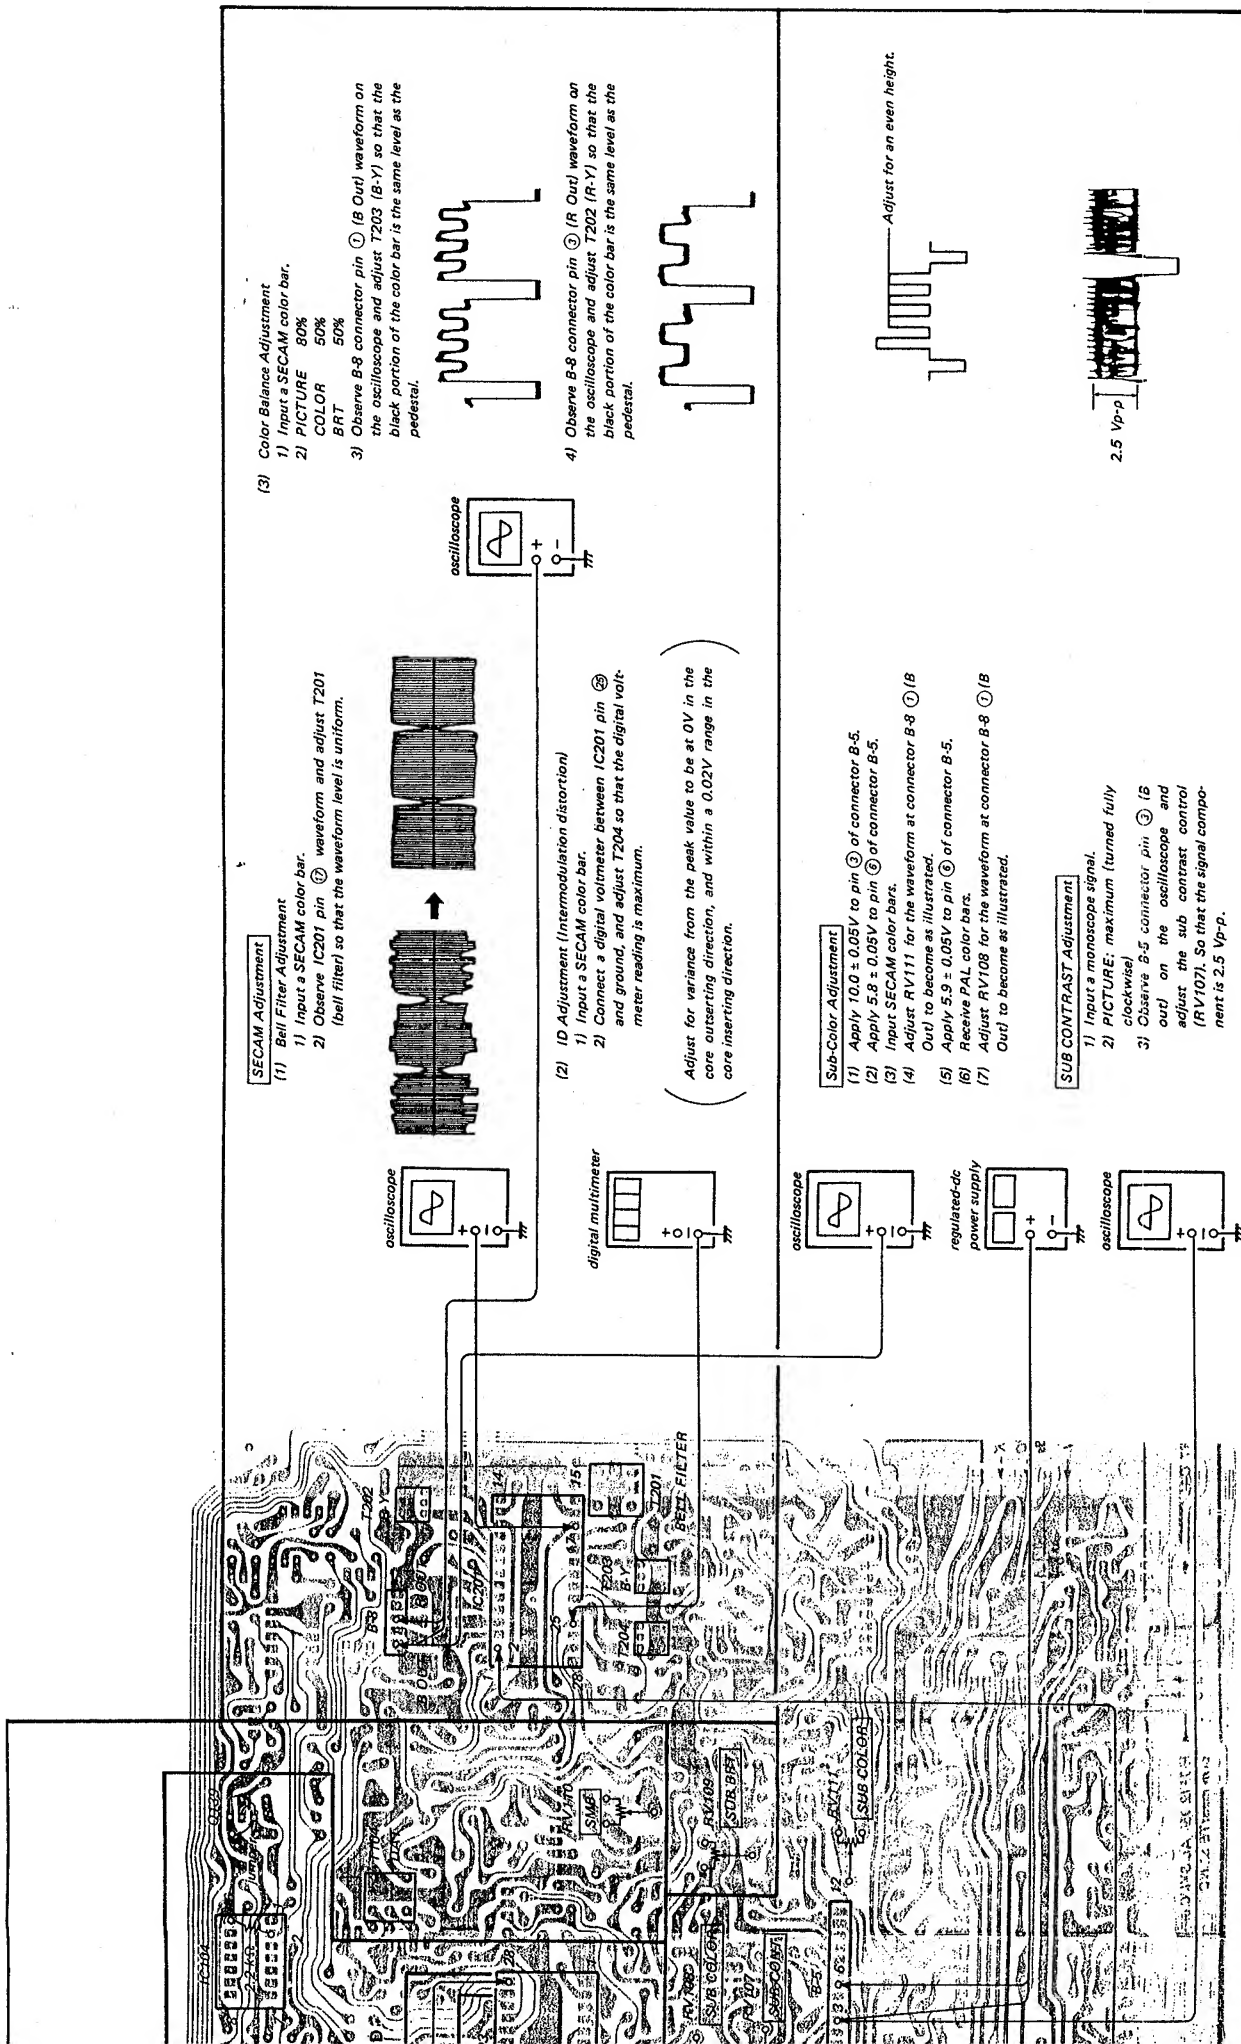






For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauritron.co.uk

# 4-3. Q. BOARD ADJUSTMENTS

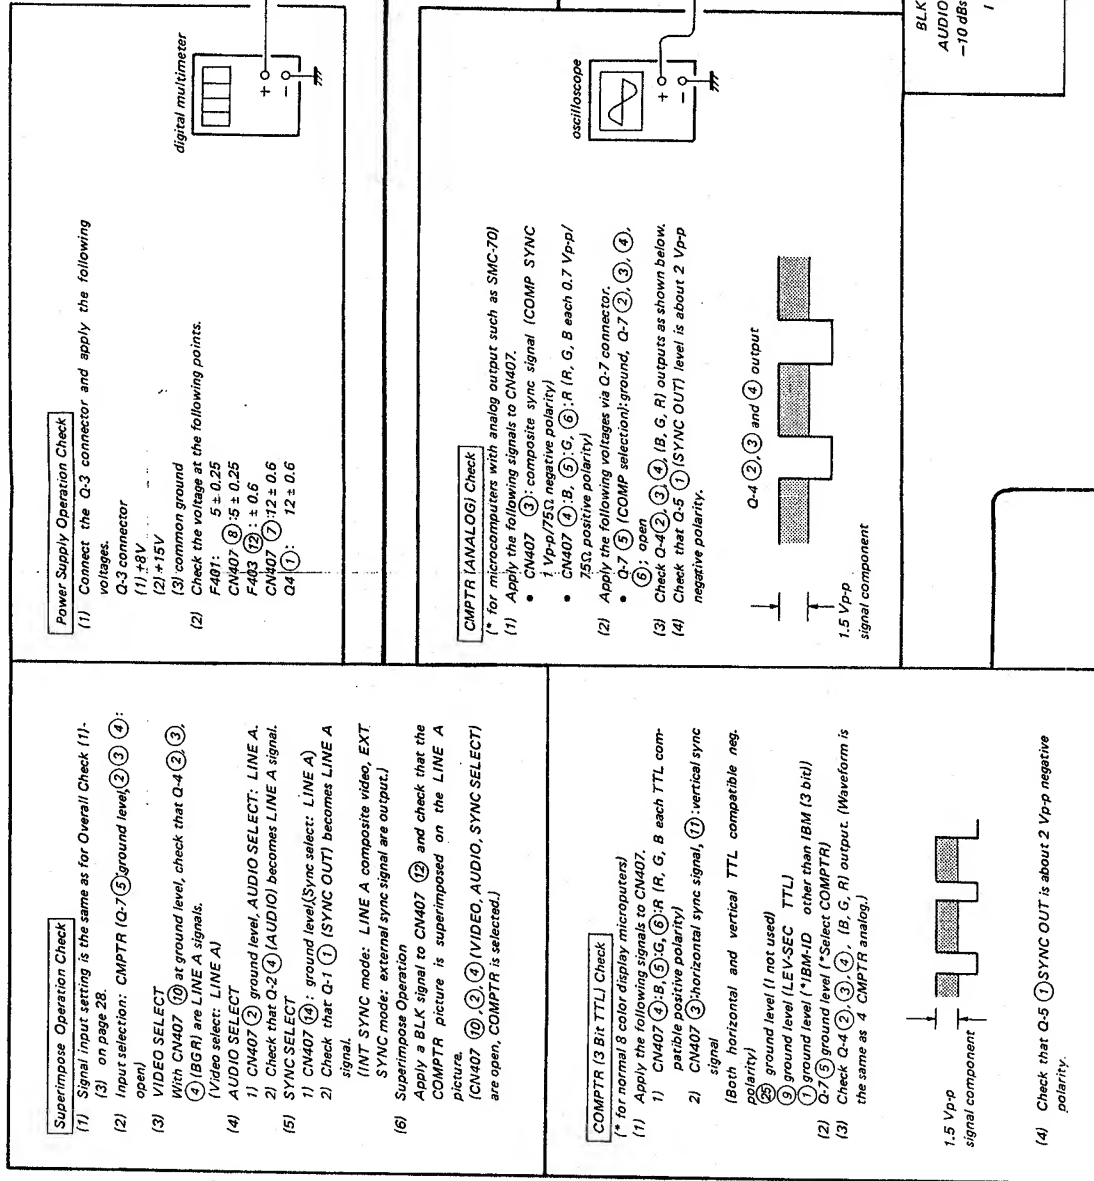



regulated-dc  
power supply



### R, G, B System Operation Check and Preset

PICTURE: minimum

BRIGHT: Set at mechanical center

(1) Apply the following voltages via the Q-7 connector.

(1) Q-7 (RGB selection): ground level

(2) Q-7 (PIC): 4.0V DC

(3) Q-7 (BRT): 6.0V DC

(2) Connector input

Apply RGB signal to each of the following inputs:

CN403: R

CN405: G

(3) BRT Adjustment

1) Set G-BRT (RV404) at mechanical center.

2) Adjust BRT (RV402) so that Q-4 connector (G output) pedestal level is 2.8V DC.

(3) Adjust B-BRT (RV405) in the same way for Q-4 connector (B output).

4) Adjust R-BRT (RV403) in the same way for Q-4 connector (R output).

(4) PIC Adjustment

PICTURE: maximum

• Q-7 connector (PIC): 12.0V DC

• Adjust PIC (RV401) so that Q-4 connector (G output) signal component is 2.5 Vp-p.

• Check that Q-4 connector (B output) and (R output) are also 2.5 Vp-p.




### COMPOSITE System Operation Check

BRIGHT: center

PICTURE: center

(1) Apply the signal shown to Q-1 connector.

(This level corresponds to the B.8 output when 1 Vp-p composite input is applied to the B board.)



pedestal 2.8V DC

1.5V DC

(2) Check that the input waveforms are equal at the following points.

1) B-Q-1 connector (Q4 connector)

2) G-Q-1 connector (Q4 connector)

3) R-Q-1 connector (Q4 connector)

### CMPTTR (IBM) Check

(\* IBM 5150 personal computer)

(1) Apply the following signals to CN407.

CN407 (A): (4) B (5) G (6) R

All TTL compatible positive polarity


(3) H SYNC (1) V SYNC

TTL compatible positive polarity

CN407 (5) ground level (LEV-SEC TTL)

(2) Q-7 (5) ground level (CMPTTR select)

(3) Check Q-4 (2) (3) (4) (B, G, R) outputs. (Waveform is the same as 4 CMPTTR analog.)



### Overall Operation Check

(1) Connect Q1, Q2, Q3, Q4, Q5 and Q7 and B, D and H boards.

(2) Apply video and audio signals to B board A, B VTR inputs.

Also, apply a composite sync signal to the external sync input.

(3) Q Board

(video input [composite] 1 Vp-p/75Ω audio input -10 dB external sync input 4 Vp-p/75Ω negative polarity)

1) Apply these signals to R, G, B video and audio inputs. (video input [component RGB] 0.7 Vp-p/75Ω audio input -10 dB)

2) Apply input signals to CMPTTR connector.

CN407 (3) composite sync signal 1 Vp-p/75Ω (4) (5) (6) B, G, R -0.7 Vp-p/75Ω

CN407 (3) AUDIO -10 dB

(4) LINE A Check

1) Input selection is LINE A, and sync selection is INT SYNC. (Q-7 (2) (3) (4) (5) (6) open)

2) Check that LINE A decoded RGB signal is being output at Q-4 (2) (3) (4) (5) (6) (B, G, R).

3) Check that Q-2 (4) AUDIO is LINE A. (Level drops about -16 dBs [about 6 dB from connector input].)

4) Check that there is LINE A video at Q-1 (1) (SYNC OUT) (Level is 2 Vp-p)

5) Change sync selection to EXT SYNC. Check that at this time Q-1 (1) changes to composite sync signal from external sync connector.

(Q-7 (6) is ground level, output level about 2 Vp-p, negative polarity)

(5) LINE B Check Select LINE B. (Q-7 (2) ground level (3) (4) (5) open) Repeat steps 2) (5) for LINE A.

(6) VTR Check Select VTR. (Q-7 (3) ground level (2) (4) (5) open) Repeat steps 2) (5) for LINE A.

(7) RGB Check

1) Make input selection RGB. Sync selection is internal sync. (Q-7 (4) ground level (2) (3) (6) open)

2) Check that signals from R, G, B are coming on Q-4 (2) (3) (4) (5) (6) (R, G, B).

3) Q-2 (4) (AUDIO) signal should be from RGB.

4) Check that there is a composite sync signal from external sync connector at Q-1 (1) (SYNC OUT).

5) Make sync selection EXT SYNC and make sure that Q-1 (1) output does not change. (In RGB mode, external sync is selected regardless of INT/EXT.)

(8) CMPTTR Check

1) Input selection: CMPTTR, Sync selection: INT SYNC (Q-7 (5) ground level (2) (3) (4) open)

2) Check Q-4 (2) (3) (4) (5) (6) (B, G, R) and check Q-2 (4) (AUDIO).


3) Check that Q-1 (1) (SYNC OUT) is the signal from CMPTTR (3)

4) Check that Q-1 (1) does not change when changing sync selection from INT/EXT.


(4) Check that Q-5 (1) (SYNC OUT) is about 2 Vp-p negative polarity.

# SECTION 5 DIAGRAMS

5-1. CIRCUIT BOARDS LOCATION


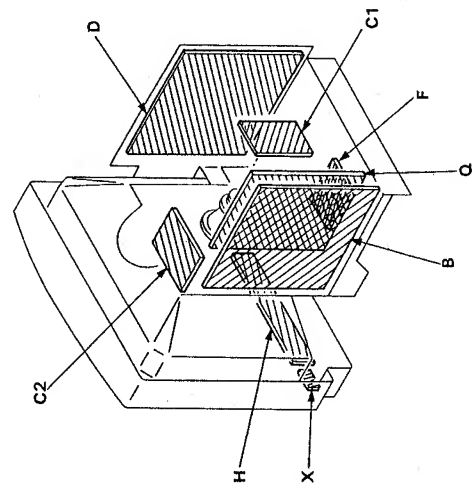


5-2. BLOCK DIAGRAM

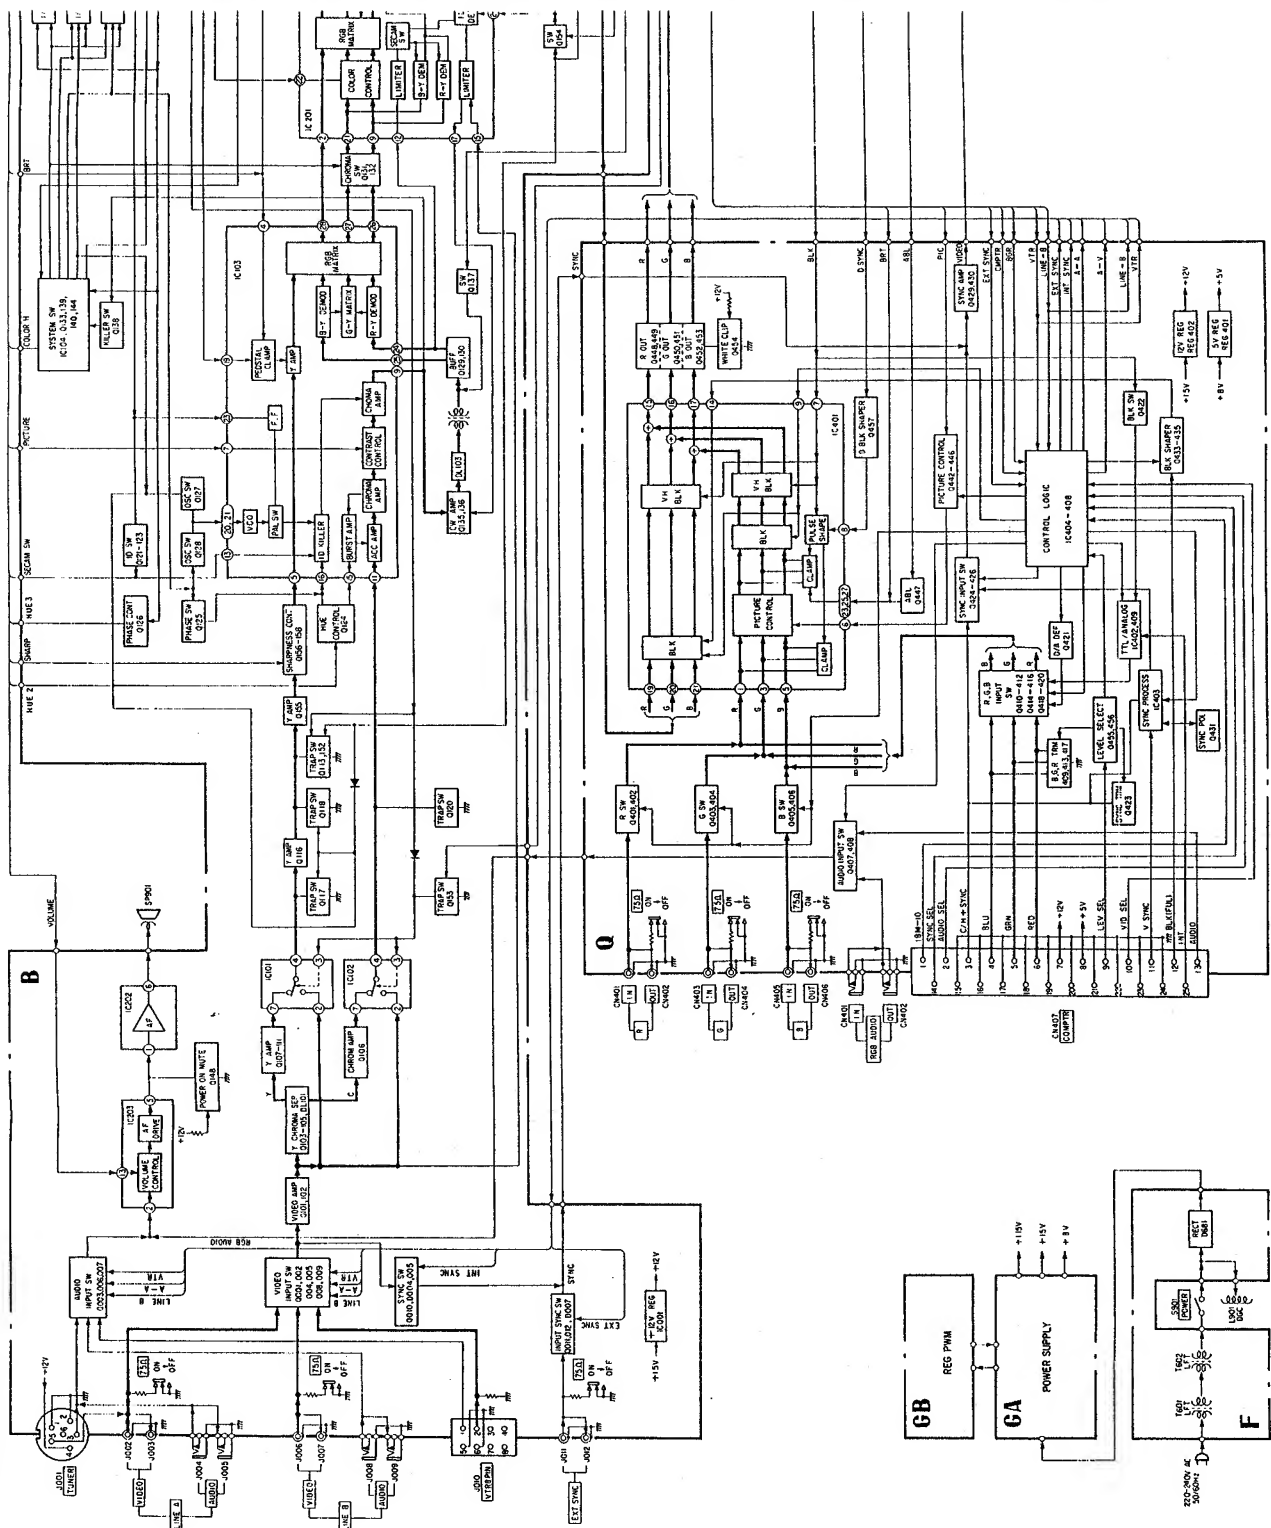

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844 351694 Fax: 01844-352554  
Email: enquiries@mauritron.co.uk

## 5-3. SEMICONDUCTORS

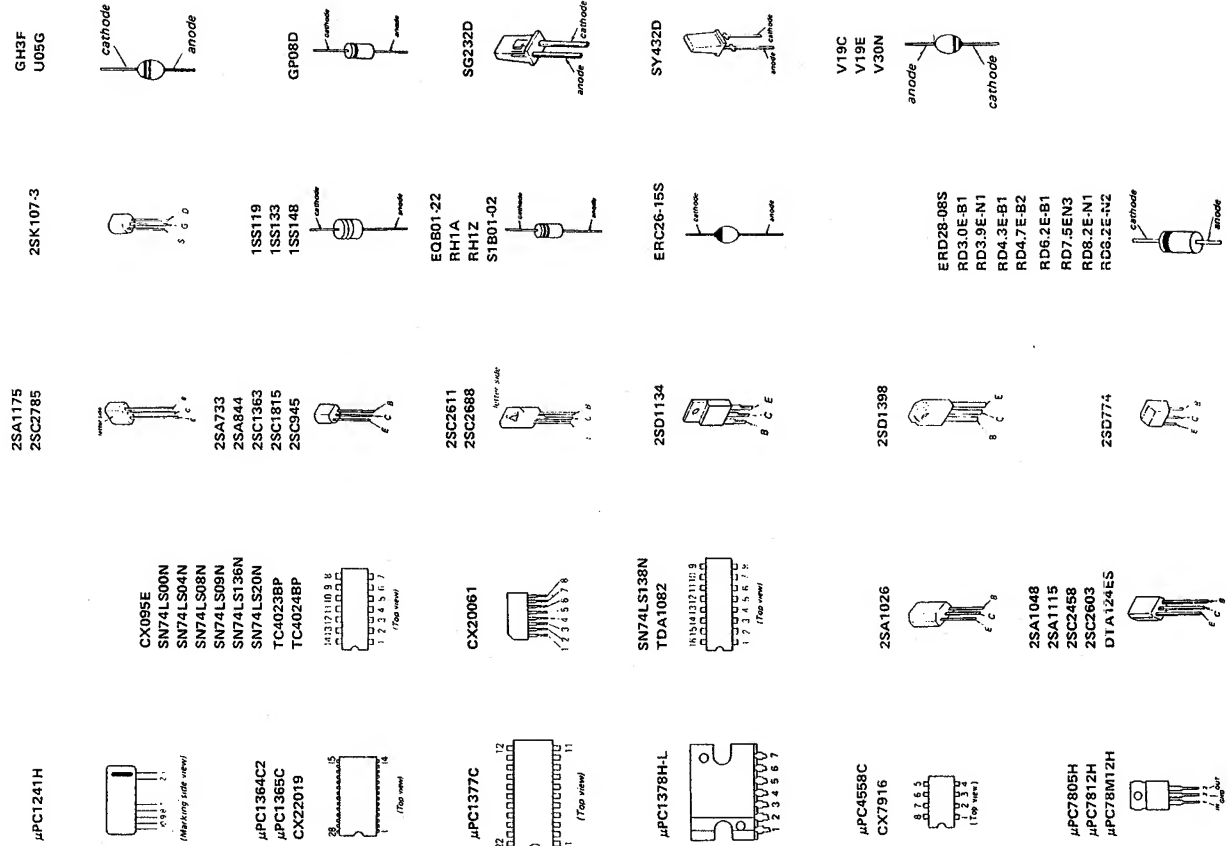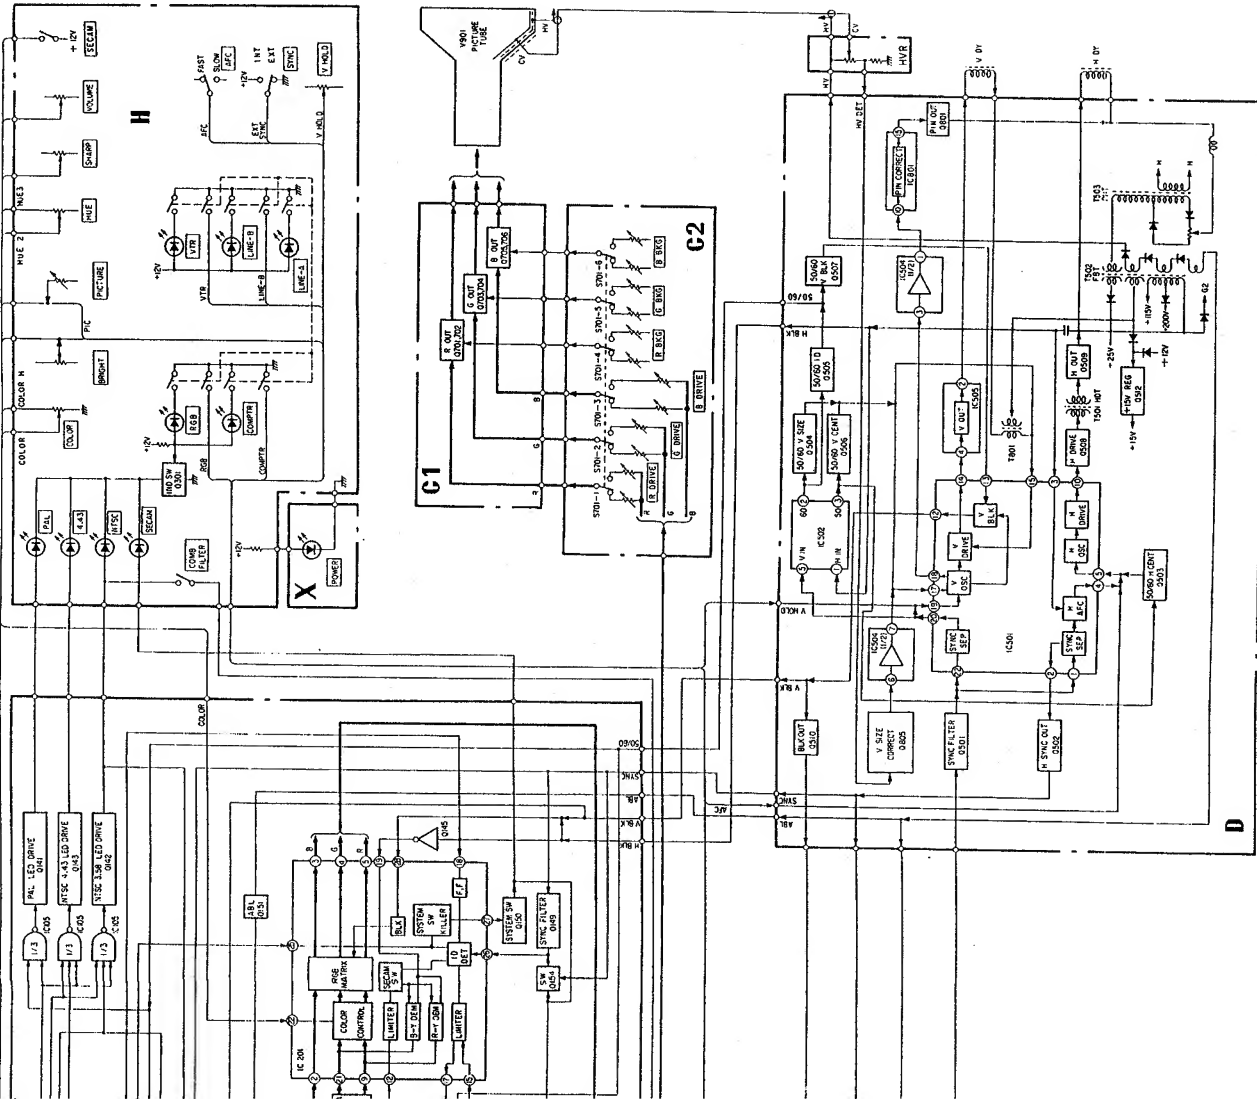


# 5.4. SCHEMATIC DIAGRAM

Note: The components identified by shading and mark  $\Delta$  are critical for safety. Replace only with part number specified.

- All capacitors are in  $\mu\text{F}$  unless otherwise noted.  $\mu\text{F}$ :  $\mu\text{F}$  50WV or less are not indicated except for electrolytics.
- All resistors are in ohms, 1/5W unless otherwise noted.  $\text{k}\Omega = 1000\Omega$ ,  $\text{M}\Omega = 1000\text{k}\Omega$
- Notice that the following boards have not a resistance wattage of 1/5W.
- GA Board .... 1/4W (as a reference)
- $\square$  : nonflammable resistor.
- $\square$  : fusible resistor
- $\Delta$  : internal component.
- $\square$  : panel designation.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Readings are taken with a color-bar signal input to LINE A.
- Voltages are dc with respect to ground unless otherwise noted.
- The voltage of Q601 ~ Q603 is a reference value between emitter of Q601.
- Readings are taken with a 10M $\Omega$  digital multimeter.
- $\square$  : adjustment for repair.
- Voltage variations may be noted due to normal production tolerances.
- : B + bus.
- ① : The number indicates No. of a waveform diagram.
- For the waveform diagram, refer to page 50.
- no mark : PAL
- ( ) : SECAM
- < : NTSC 3.58
- [ ] : NTSC 4.43
- \* : Not measurable.


For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauratron.co.uk

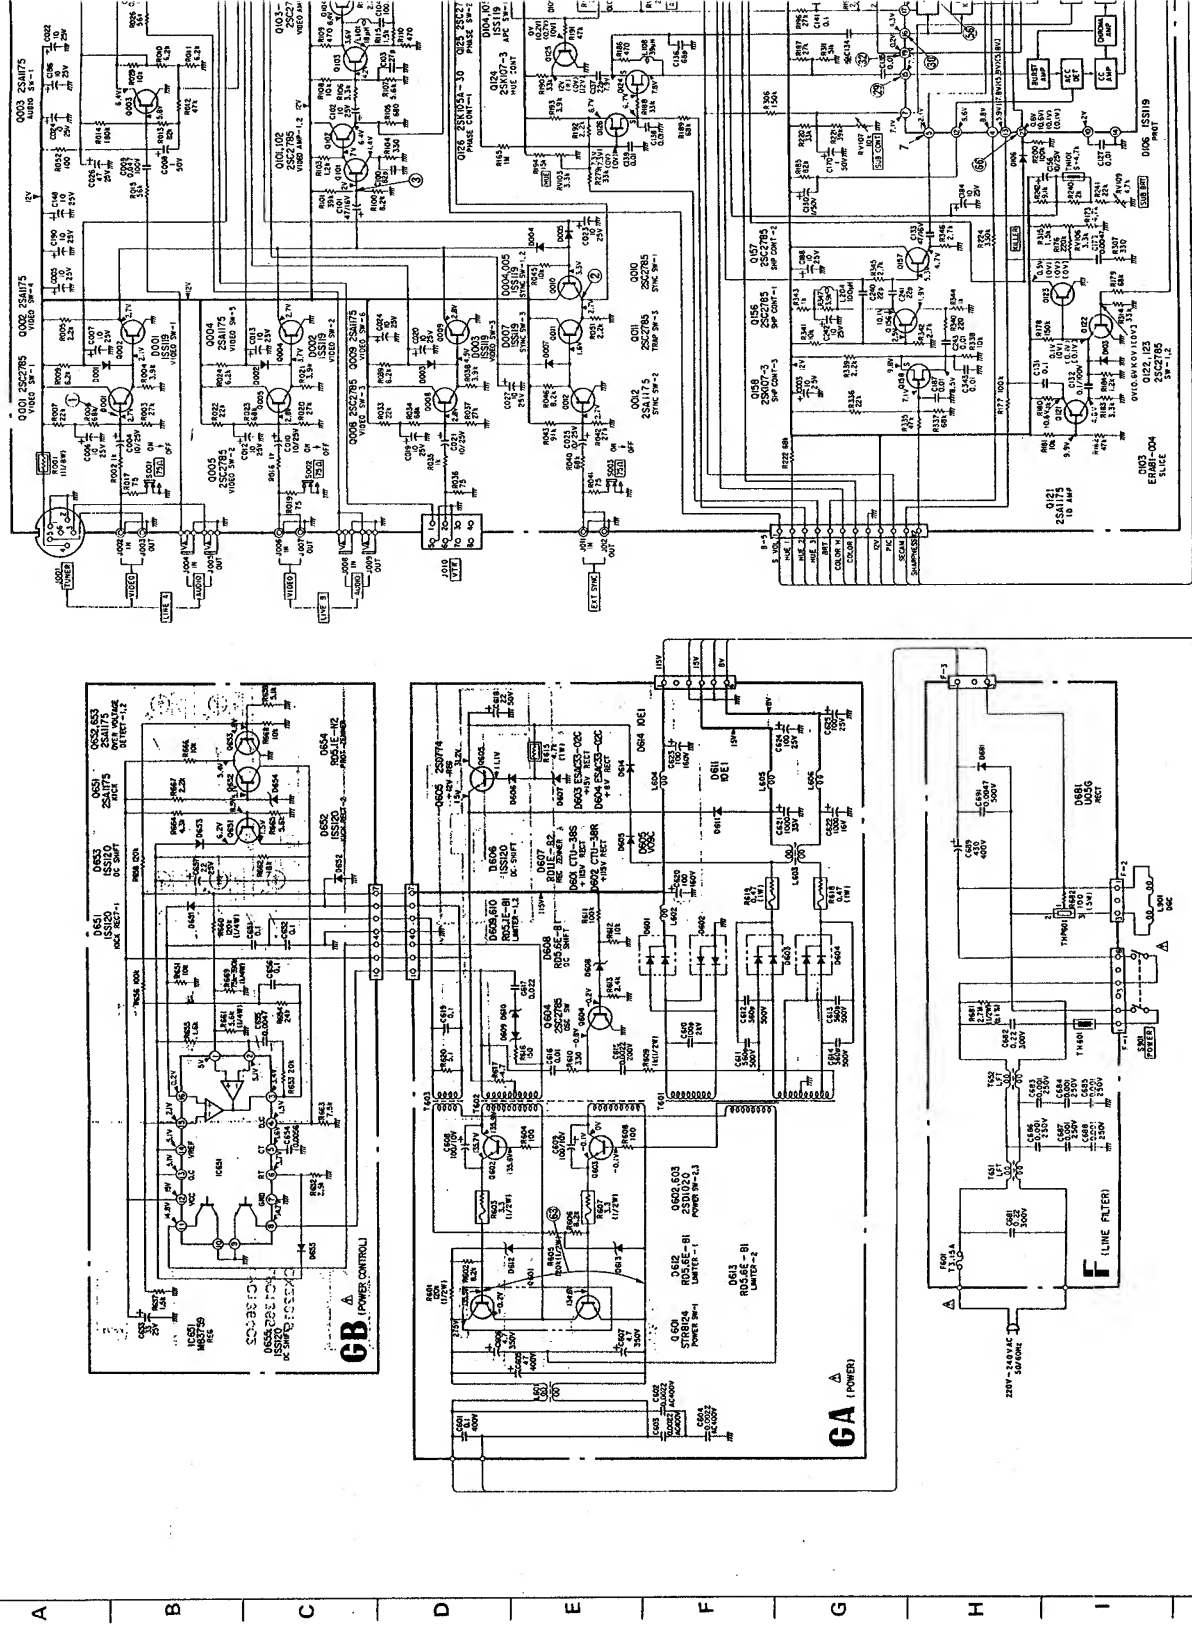




-36-








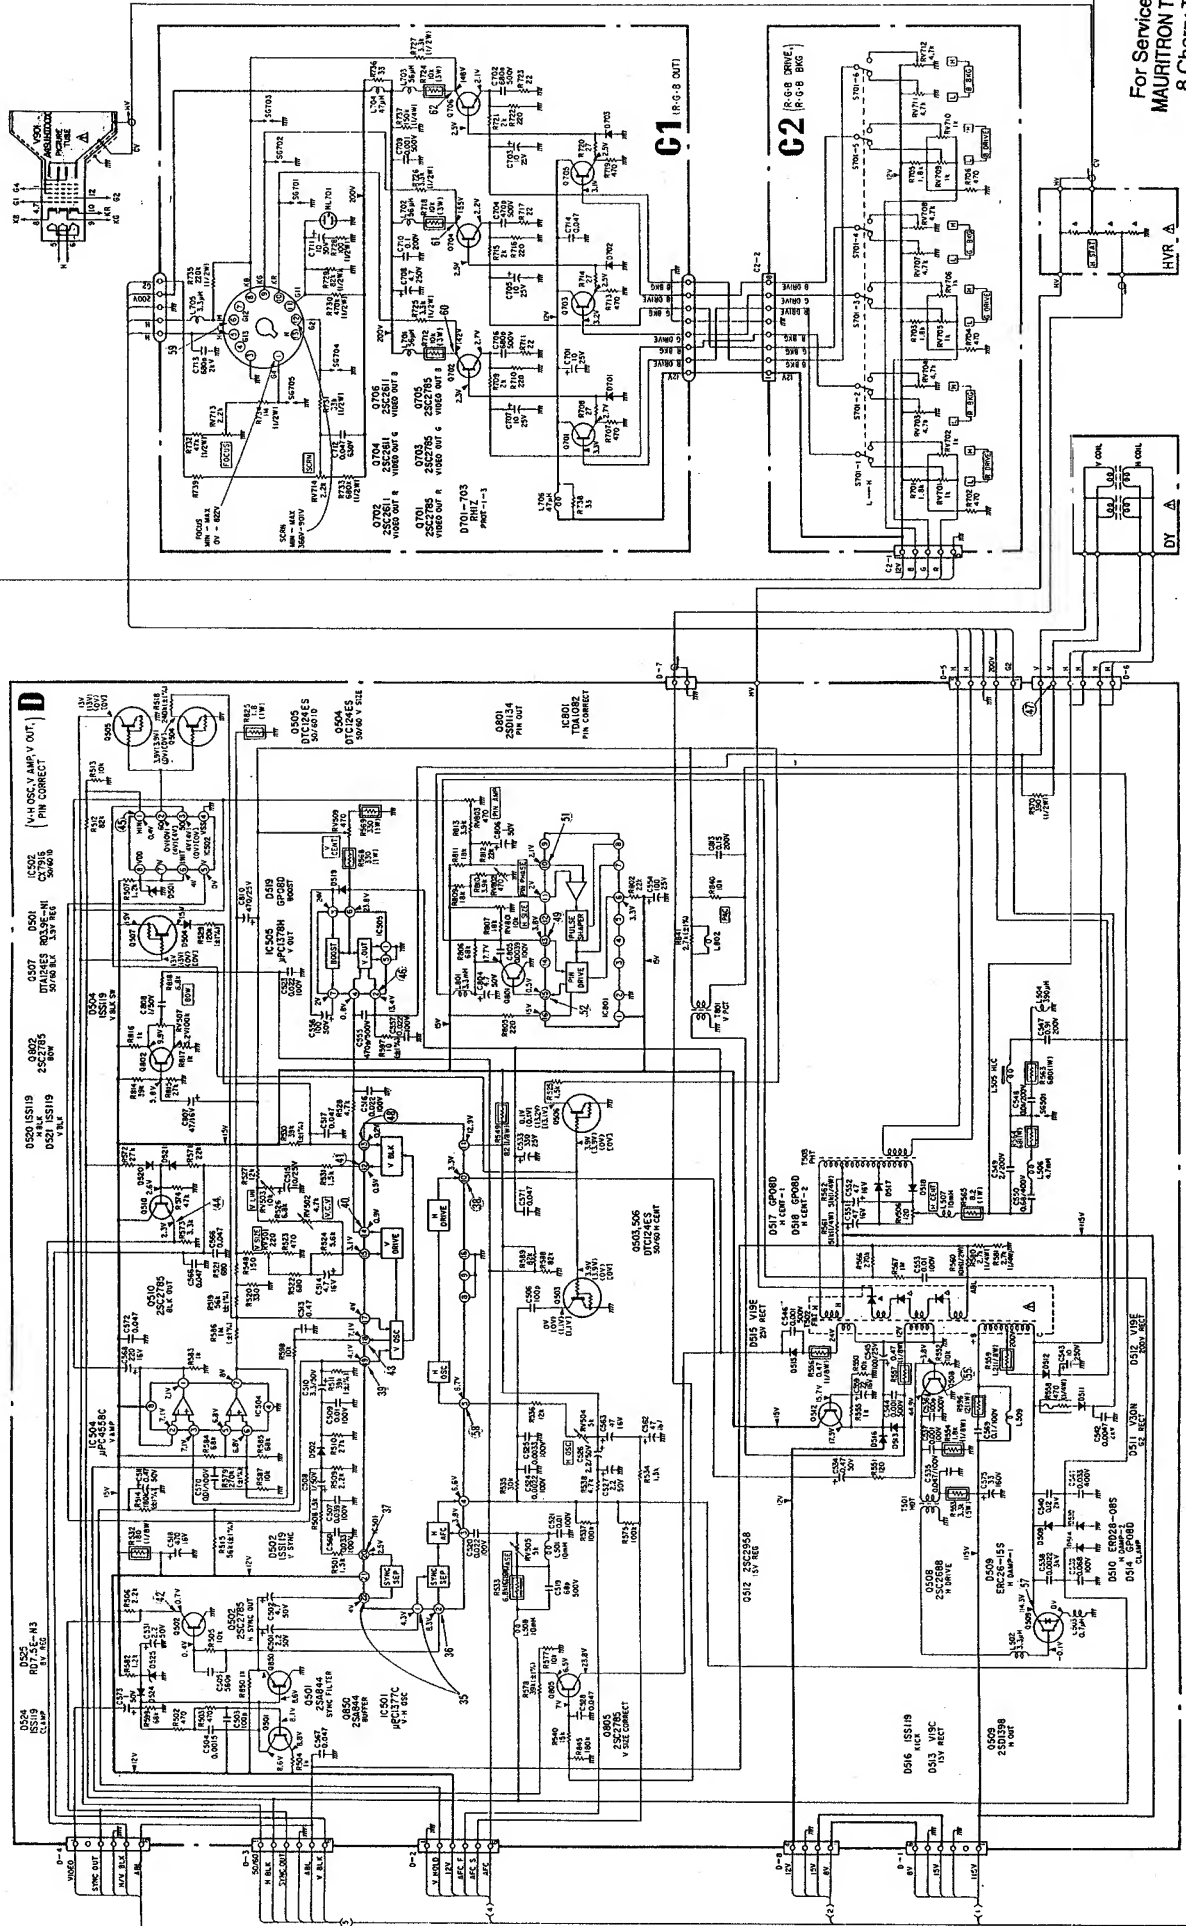


For Service Manuals Contact  
 MAURITON TECHNICAL SERVICES  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel: 01844-351694 Fax: 01844-352554  
 Email: enquiries@mauriton.co.uk



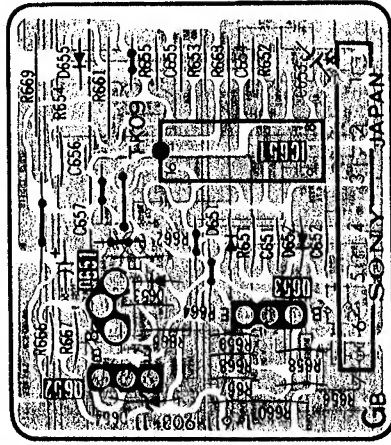

**For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauritron.co.uk**

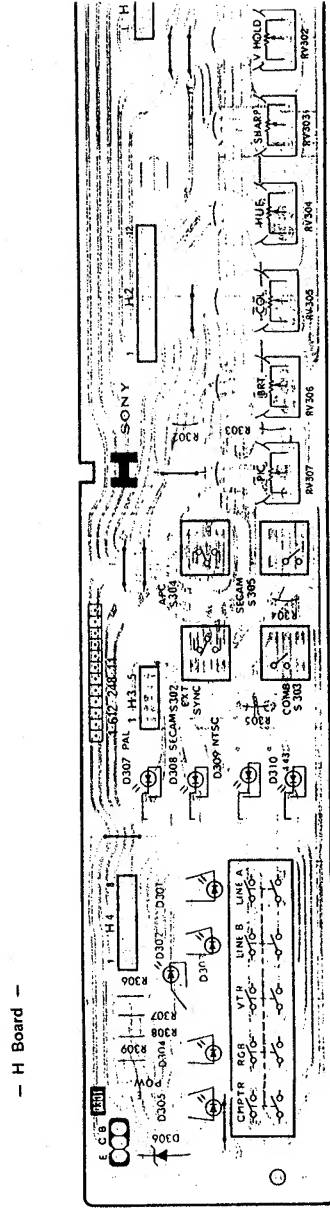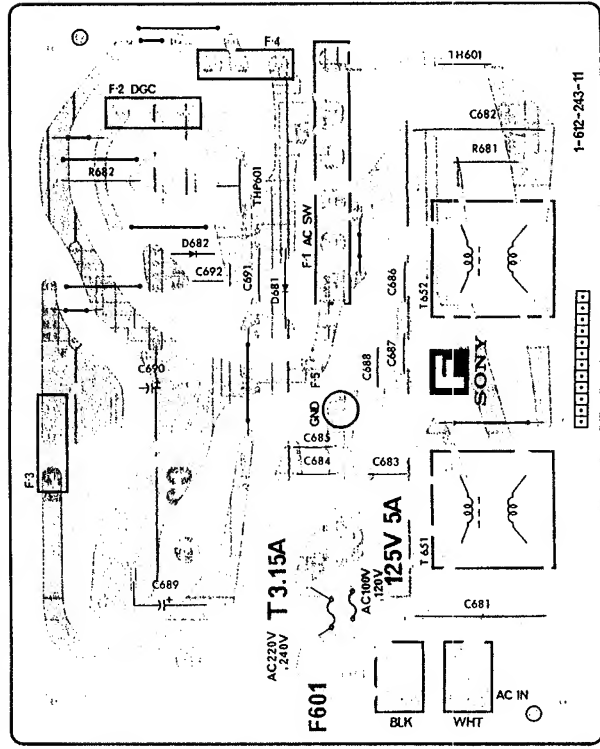


# PVM-2010QM PVM-2010QM

(CUSTOMER CONTROL) **B** (AF AMP, AF OUT, VIDEO AMP, Y/CHROMA AMP, LINE IN)

- B Board -

0	153	111	110	109	144	104	139	140	141	105	142	143
IC	153	111	110	109	144	104	139	140	141	105	142	143
D	153	111	110	109	144	104	139	140	141	105	142	143
ADJ	153	111	110	109	144	104	139	140	141	105	142	143

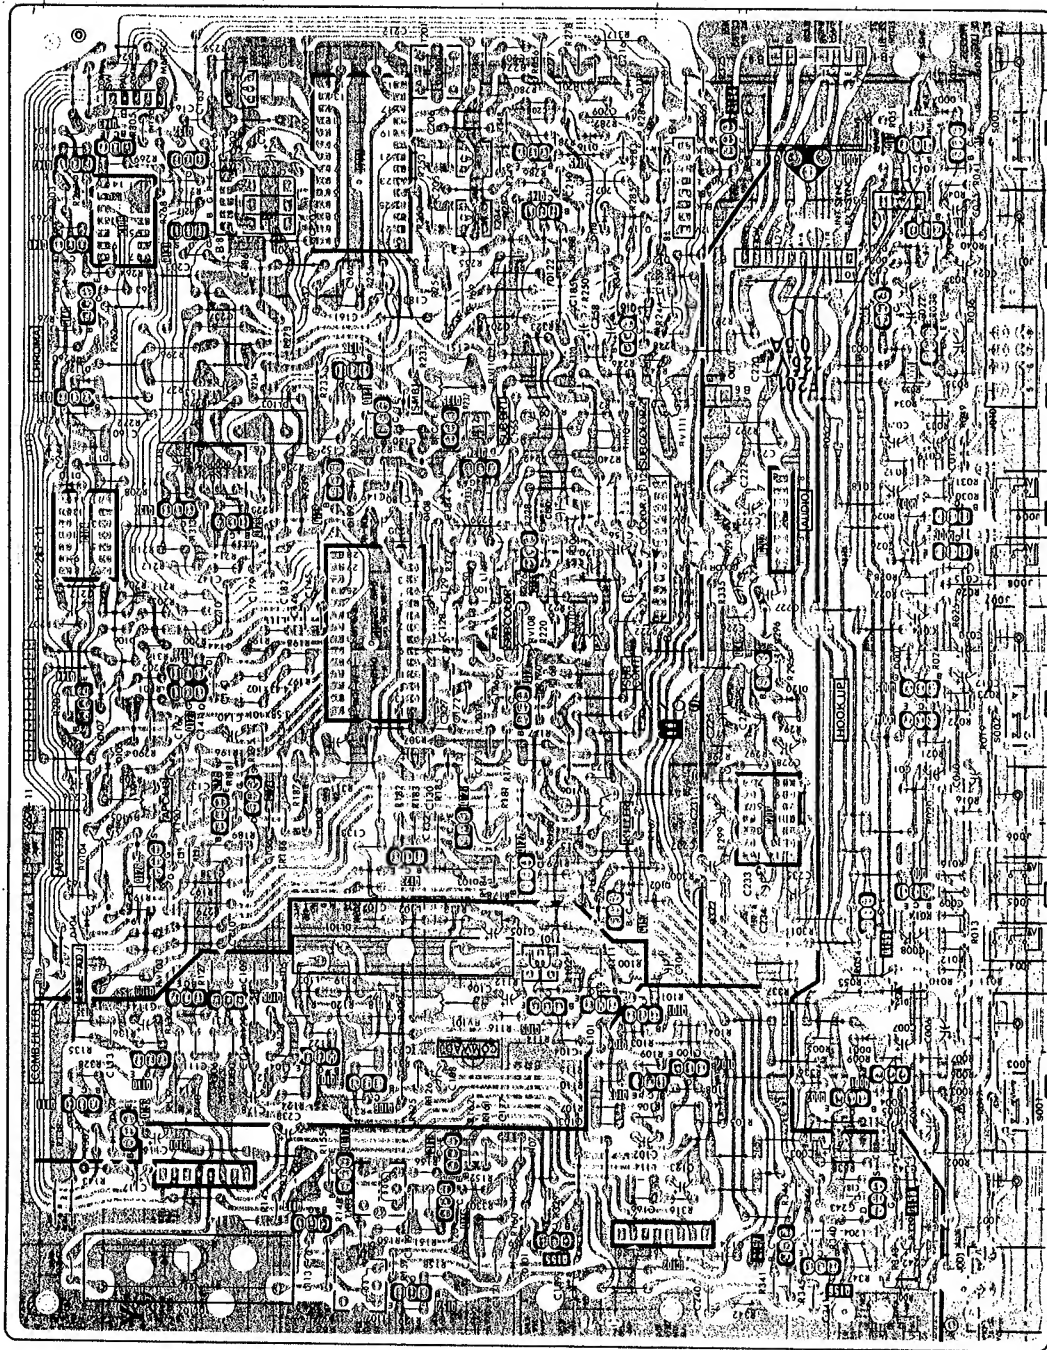

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd. Chinnor  
 Oxon OX9 4QY  
 Tel: 01844 351694 Fax: 01844 352554  
 Email: enquiries@mauriton.co.uk

**D**  $\sqrt{V \cdot H \text{ OSC. V AMP.}}$   
V OUT, PIN CORRECT


A — D Board —

Q, IC	0	ADJ
503	520	RV504
504	521	RV505
505	522	RV506
506	523	RV507
507	524	RV508
508	525	RV509
509	526	RV510
510	527	RV511
511	528	RV512
512	529	RV513
513	530	RV514
514	531	RV515
515	532	RV516
516	533	RV517
517	534	RV518
518	535	RV519
519	536	RV520
520	537	RV521
521	538	RV522
522	539	RV523
523	540	RV524
524	541	RV525
525	542	RV526
526	543	RV527
527	544	RV528
528	545	RV529
529	546	RV530
530	547	RV531
531	548	RV532
532	549	RV533
533	550	RV534
534	551	RV535
535	552	RV536
536	553	RV537
537	554	RV538
538	555	RV539
539	556	RV540
540	557	RV541
541	558	RV542
542	559	RV543
543	560	RV544
544	561	RV545
545	562	RV546
546	563	RV547
547	564	RV548
548	565	RV549
549	566	RV550
550	567	RV551
551	568	RV552
552	569	RV553
553	570	RV554
554	571	RV555
555	572	RV556
556	573	RV557
557	574	RV558
558	575	RV559
559	576	RV560
560	577	RV561
561	578	RV562
562	579	RV563
563	580	RV564
564	581	RV565
565	582	RV566
566	583	RV567
567	584	RV568
568	585	RV569
569	586	RV570
570	587	RV571
571	588	RV572
572	589	RV573
573	590	RV574
574	591	RV575
575	592	RV576
576	593	RV577
577	594	RV578
578	595	RV579
579	596	RV580
580	597	RV581
581	598	RV582
582	599	RV583
583	600	RV584
584	601	RV585
585	602	RV586
586	603	RV587
587	604	RV588
588	605	RV589
589	606	RV590
590	607	RV591
591	608	RV592
592	609	RV593
593	610	RV594
594	611	RV595
595	612	RV596
596	613	RV597
597	614	RV598
598	615	RV599
599	616	RV600
600	617	RV601
601	618	RV602
602	619	RV603
603	620	RV604
604	621	RV605
605	622	RV606
606	623	RV607
607	624	RV608
608	625	RV609
609	626	RV610
610	627	RV611
611	628	RV612
612	629	RV613
613	630	RV614
614	631	RV615
615	632	RV616
616	633	RV617
617	634	RV618
618	635	RV619
619	636	RV620
620	637	RV621
621	638	RV622
622	639	RV623
623	640	RV624
624	641	RV625
625	642	RV626
626	643	RV627
627	644	RV628
628	645	RV629
629	646	RV630
630	647	RV631
631	648	RV632
632	649	RV633
633	650	RV634
634	651	RV635
635	652	RV636
636	653	RV637
637	654	RV638
638	655	RV639
639	656	RV640
640	657	RV641
641	658	RV642
642	659	RV643
643	660	RV644
644	661	RV645
645	662	RV646
646	663	RV647
647	664	RV648
648	665	RV649
649	666	RV650
650	667	RV651
651	668	RV652
652	669	RV653
653	670	RV654
654	671	RV655
655	672	RV656
656	673	RV657
657	674	RV658
658	675	RV659
659	676	RV660
660	677	RV661
661	678	RV662
662	679	RV663
663	680	RV664
664	681	RV665
665	682	RV666
666	683	RV667
667	684	RV668
668	685	RV669
669	686	RV670
670	687	RV671
671	688	RV672
672	689	RV673
673	690	RV674
674	691	RV675
675	692	RV676
676	693	RV677
677	694	RV678
678	695	RV679
679	696	RV680
680	697	RV681
681	698	RV682
682	699	RV683
683	700	RV684
684	701	RV685
685	702	RV686
686	703	RV687
687	704	RV688
688	705	RV689
689	706	RV690
690	707	RV691
691	708	RV692
692	709	RV693
693	710	RV694
694	711	RV695
695	712	RV696
696	713	RV697
697	714	RV698
698	715	RV699
699	716	RV700
700	717	RV701
701	718	RV702
702	719	RV703
703	720	RV704
704	721	RV705
705	722	RV706
706	723	RV707
707	724	RV708
708	725	RV709
709	726	RV710
710	727	RV711
711	728	RV712
712	729	RV713
713	730	RV714
714	731	RV715
715	732	RV716
716	733	RV717
717	734	RV718
718	735	RV719
719	736	RV720
720	737	RV721
721	738	RV722
722	739	RV723
723	740	RV724
724	741	RV725
725	742	RV726
726	743	RV727
727	744	RV728
728	745	RV729
729	746	RV730
730	747	RV731
731	748	RV732
732	749	RV733
733	750	RV734
734	751	RV735
735	752	RV736
736	753	RV737
737	754	RV738
738	755	RV739
739	756	RV740
740	757	RV741
741	758	RV742
742	759	RV743
743	760	RV744
744	761	RV745
745	762	RV746
746	763	RV747
747	764	RV748
748	765	RV749
749	766	RV750
750	767	RV751
751	768	RV752
752	769	RV753
753	770	RV754
754	771	RV755
755	772	RV756
756	773	RV757
757	774	RV758
758	775	RV759
759	776	RV760
760	777	RV761
761	778	RV762
762	779	RV763
763	780	RV764
764	781	RV765
765	782	RV766
766	783	RV767
767	784	RV768
768	785	RV769
769	786	RV770
770	787	RV771
771	788	RV772
772	789	RV773
773	790	RV774
774	791	RV775
775	792	RV776
776	793	RV777
777	794	RV778
778	795	RV779
779	796	RV780
780	797	RV781
781	798	RV782
782	799	RV783
783	800	RV784
784	801	RV785
785	802	RV786
786	803	RV787
787	804	RV788
788	805	RV789
789	806	RV790
790	807	RV791
791	808	RV792
792	809	RV793
793	810	RV794
794	811	RV795
795	812	RV796
796	813	RV797
797	814	RV798
798	815	RV799
799	816	RV800
800	817	RV801
801	818	RV802
802	819	RV803
803	820	RV804
804	821	RV805
805	822	RV806
806	823	RV807
807	824	RV808
808	825	RV809
809	826	RV810
810	827	RV811
811	828	RV812
812	829	RV813
813	830	RV814
814	831	RV815
815	832	RV816
816	833	RV817
817	834	RV818
818	835	RV819
819	836	RV820
820	837	RV821
821	838	RV822
822	839	RV823
823	840	RV824
824	841	RV825
825	842	RV826
826	843	RV827
827	844	RV828
828	845	RV829
829	846	RV830
830	847	RV831
831	848	RV832
832	849	RV833
833	850	RV834
834	851	RV835
835	852	RV836
836	853	RV837
837	854	RV838
838	855	RV839
839	856	RV840
840	857	RV841
841	858	RV842
842	859	RV843
843	860	RV844
844	861	RV845
845	862	RV846
846	863	RV847
847	864	RV848
848	865	RV849
849	866	RV850
850	867	RV851
851	868	RV852
852	869	RV853
853	870	RV854
854	871	RV855
855	872	RV856
856	873	RV857
857	874	RV858
858	875	RV859
859	876	RV860
860	877	RV861
861	878	RV862
862	879	RV863
863	880	RV864
864	881	RV865
865	882	RV866
866	883	RV867
867	884	RV868
868	885	RV869
869	886	RV870
870	887	RV871
871	888	RV872
872	889	RV873
873	890	RV874
874	891	RV875
875	892	RV876
876	893	RV877
877	894	RV878
878	895	RV879
879	896	RV880
880	897	RV881
881	898	RV882
882	899	RV883
883	900	RV884
884	901	RV885
885	902	RV886
886	903	RV887
887	904	RV888
888	905	RV889
889	906	RV890
890	907	RV891
891	908	RV892
892	909	RV893
893	910	RV894
894	911	RV895
895	9	



Q R • G • B PROCESS, CONTROL LOGIC.  
[ SYNC OUT, R • G • B IN, AF IN, COMPTN IN ]

Q	455	REG-402	IC-408	IC-406	430	454	453	451	449	445	443, 444	Q
IC	455	REG-401	IC-407	426, 425	429	433	432	431	429	428	427	IC
		IC-403	424	423	419	418	417	416	415	414	413	IC
		431	408, 407	409	408	407	406	405	404	403	402	IC
D	404	420	408	409	410	423	424	425	426	427	428	D
ADJ		418	405, 406, 407									ADJ

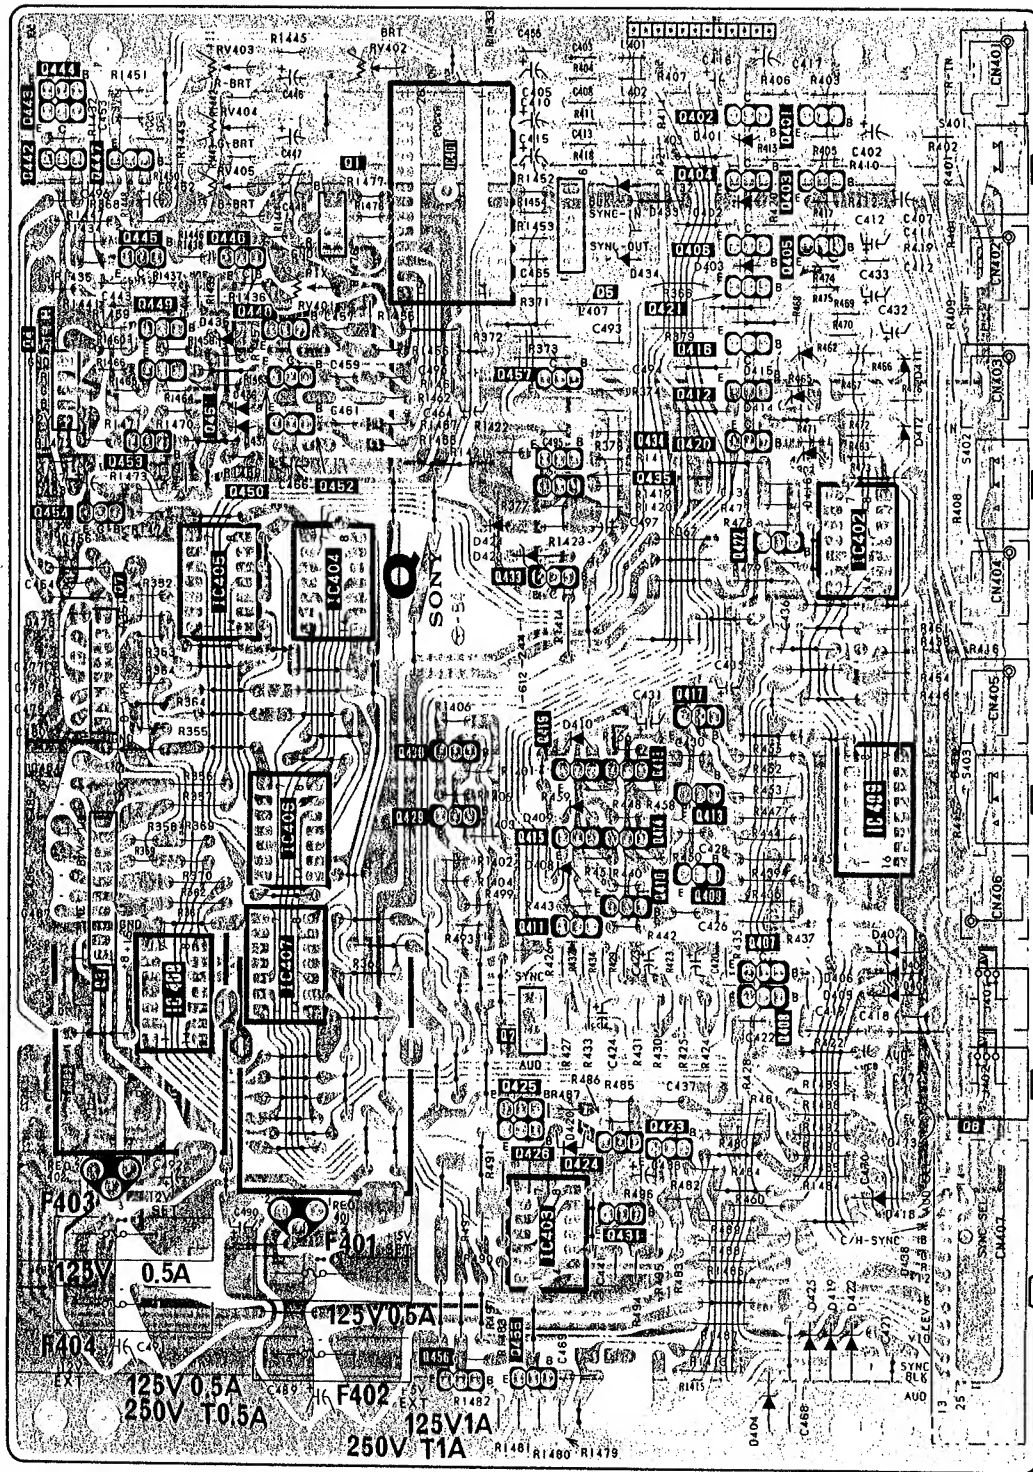


5-6. WAVEFORMS


B BOARD

①	PAL	④	SECAM	⑦	SECAM	⑩	NTSC 3.58, 4.43	⑬	PAL	⑮	PAL	⑱	PAL, SECAM NTSC 3.58, 4.43	⑳	SECAM
②	SECAM	⑤	NTSC 3.58, 4.43	⑧	SECAM	⑪	SECAM	⑭	SECAM	⑯	SECAM	⑲	SECAM	㉑	SECAM
③	PAL	⑥	SECAM	⑨	SECAM	⑫	SECAM	⑭	SECAM	⑯	SECAM	⑲	SECAM	㉑	SECAM
④	SECAM	⑦	SECAM	⑩	SECAM	⑬	SECAM	⑯	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM
⑤	NTSC 3.58, 4.43	⑧	SECAM	⑪	SECAM	⑫	SECAM	⑬	SECAM	⑭	SECAM	⑮	SECAM	⑯	SECAM
⑥	SECAM	⑨	SECAM	⑫	SECAM	⑬	SECAM	⑭	SECAM	⑮	SECAM	⑯	SECAM	⑰	SECAM
⑦	SECAM	⑩	SECAM	⑬	SECAM	⑯	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM
⑧	SECAM	⑪	SECAM	⑫	SECAM	⑬	SECAM	⑭	SECAM	⑮	SECAM	⑯	SECAM	⑰	SECAM
⑨	SECAM	⑩	SECAM	⑪	SECAM	⑫	SECAM	⑬	SECAM	⑭	SECAM	⑮	SECAM	⑯	SECAM
⑩	SECAM	⑪	SECAM	⑫	SECAM	⑬	SECAM	⑭	SECAM	⑮	SECAM	⑯	SECAM	⑰	SECAM
⑪	SECAM	⑫	SECAM	⑬	SECAM	⑭	SECAM	⑮	SECAM	⑯	SECAM	⑰	SECAM	⑱	SECAM
⑫	SECAM	⑬	SECAM	⑭	SECAM	⑮	SECAM	⑯	SECAM	⑰	SECAM	⑱	SECAM	㉑	SECAM
⑬	SECAM	⑭	SECAM	⑮	SECAM	⑯	SECAM	⑰	SECAM	⑱	SECAM	㉑	SECAM	㉑	SECAM
⑭	SECAM	⑮	SECAM	⑯	SECAM	⑰	SECAM	⑱	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM
⑮	SECAM	⑯	SECAM	⑰	SECAM	⑱	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM
⑯	SECAM	⑰	SECAM	⑱	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM
⑰	SECAM	⑱	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM
⑱	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM
㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM	㉑	SECAM

- C1 Board -

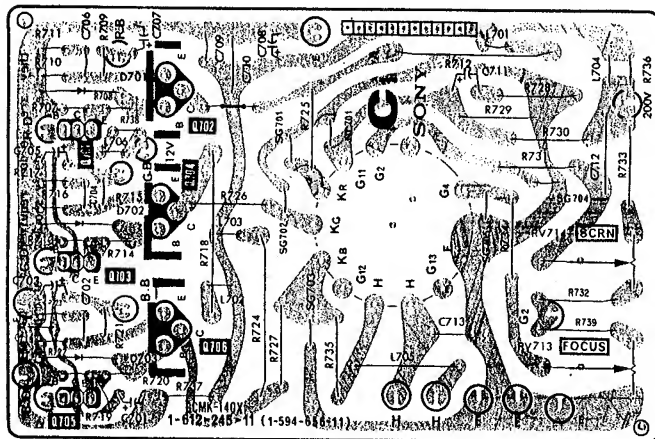

- C2 Board -

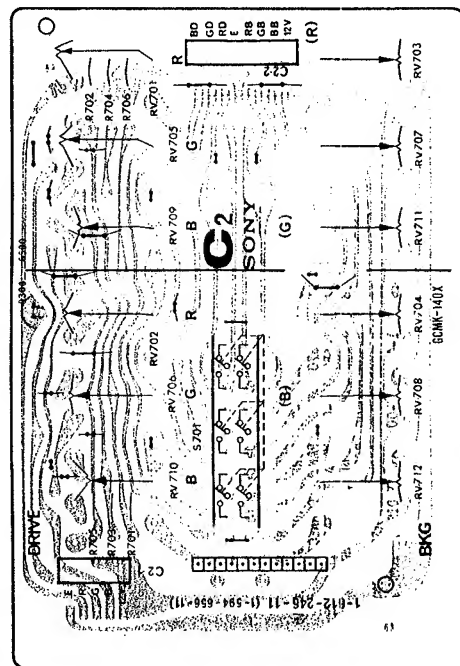



Q BOARD

19		26		34	
20		26		34	
23		26			
24		27			
24		31			
24					
25		33			
25		33			
25		33			
25		34			

D BOARD

35		43		57	
35		44		58	
35		45			
36		46			
37		47			
38		48			
39		49			
40		51			
41		52			
42		55			

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauritron.co.uk

C1 BOARD

59	
60	
60	
60	
61	
61	
61	
62	
62	
62	

GA BOARD

63	
----	--


# SECTION 6 EXPLODED VIEWS

NOTE: . . . . .  
 • Items with no part number and no description are not stocked because they are seldom required for routine service. Some delay should be anticipated when ordering these items.  
 • The construction of assembled parts are indicated with a collation number in the remark column.

• Items marked "A" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.  
 • The components identified by shading and mark A are critical for safety. Replace only with part number specified.

## (1) CABINET ASSY

■ : TA, BV3 x 8 7-685-646-71

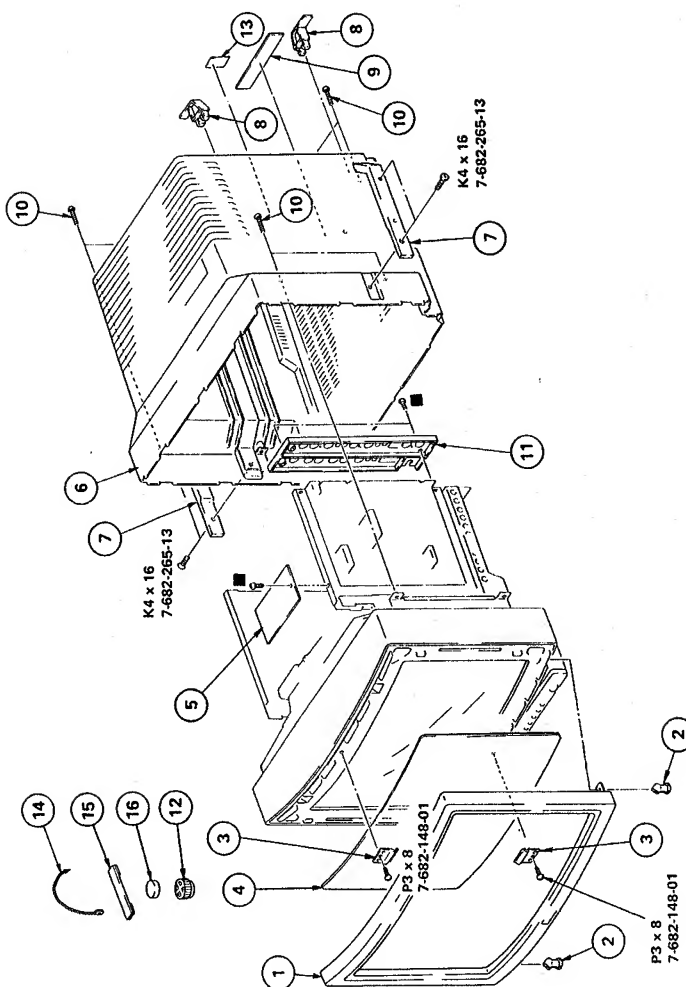


No.	Part No.	Description	Remark	No.	Part No.	Description	Remark
1	X-4370-904-1	PANEL ASSY, FRONT		9	4-370-907-01	SHEET (8), BLIND	
2	4-370-920-01	CLIP, PANEL		10	4-304-494-21	SCREEN, TAPPING, 4PHX16	
3	4-370-902-01	RETAINER, PANEL		11	4-370-930-01	PANEL, CONNECTOR	
4	4-370-925-01	FILTER		12	1-432-034-00	MARKET, ROTABLE DISK; 15MM Ø	
5	1-612-246-11	C2 BOARD		13	4-363-314-01	MARKET, ROTABLE DISK; 15MM Ø	
6	X-4370-903-1	CABINET ASSY		14	4-308-870-00	PERALLOY ASSY, CONVERGENCE	
7	X-4370-906-1	HANDLE ASSY		15	X-4308-815-00	PERALLOY ASSY, CONVERGENCE	
8	4-316-003-00	HOLDER, CORD		16	1-432-032-00	MARKET DISK; 10MM Ø	

For Service Manuals Contact  
 MAURITRON TECHNICAL SERVICES  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel: 01844-351694 Fax: 01844-352554  
 Email: enquiries@mauritron.co.uk



(2) CHASSIS ASS'Y

■ : TA, BV3 x 8 7-685-646-71

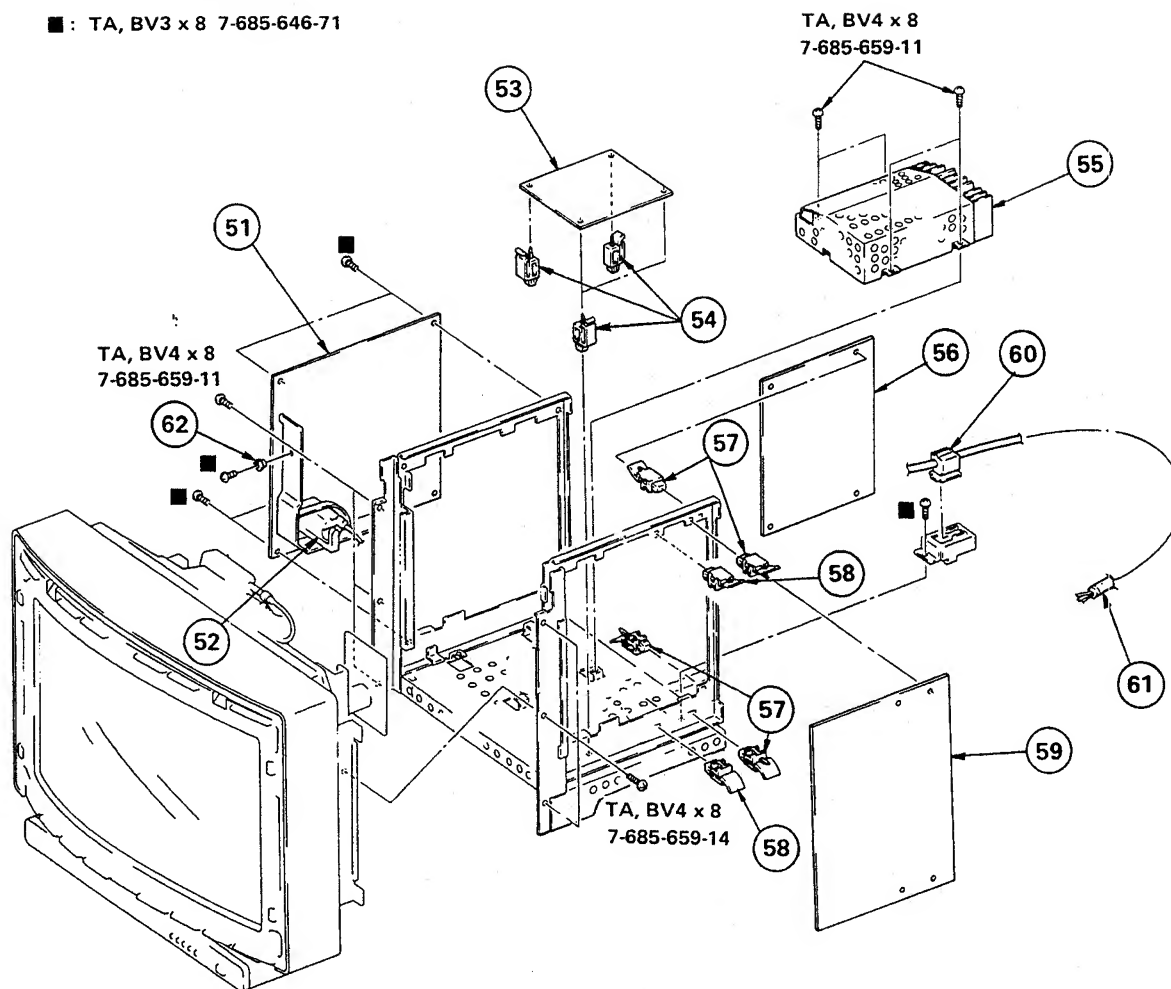

No.	Part No.	Description
51	▲:A-1345-455-A	D BOARD, COMPLETE
52	▲:1-439-322-00	TRANSFORMER ASSY, FLYBACK
53	▲:1-612-243-11	F BOARD
54	▲:3-659-681-00	HOLDER, PC BOARD
55	▲:1-413-179-11	SWITCHING REGULATOR (TK-09)
56	A-1275-050-A	Q BOARD, COMPLETE

Remark


No.	Part No.	Description
57	▲:3-703-141-00	HOLDER, PCB
58	▲:4-321-929-00	HOLDER, PC BOARD
59	▲:A-1135-239-A	B BOARD, COMPLETE
60	▲:4-364-745-00	BUSHING, AC CORD
61	▲:1-534-820-XX	POWER CORD
62	4-303-203-00	BUSHING

Remark

The components identified by shading and mark ▲ are critical for safety. Replace only with part number specified.

## (3) BEZEL ASS'Y

● : TA, BV3 x 12 7-685-648-71

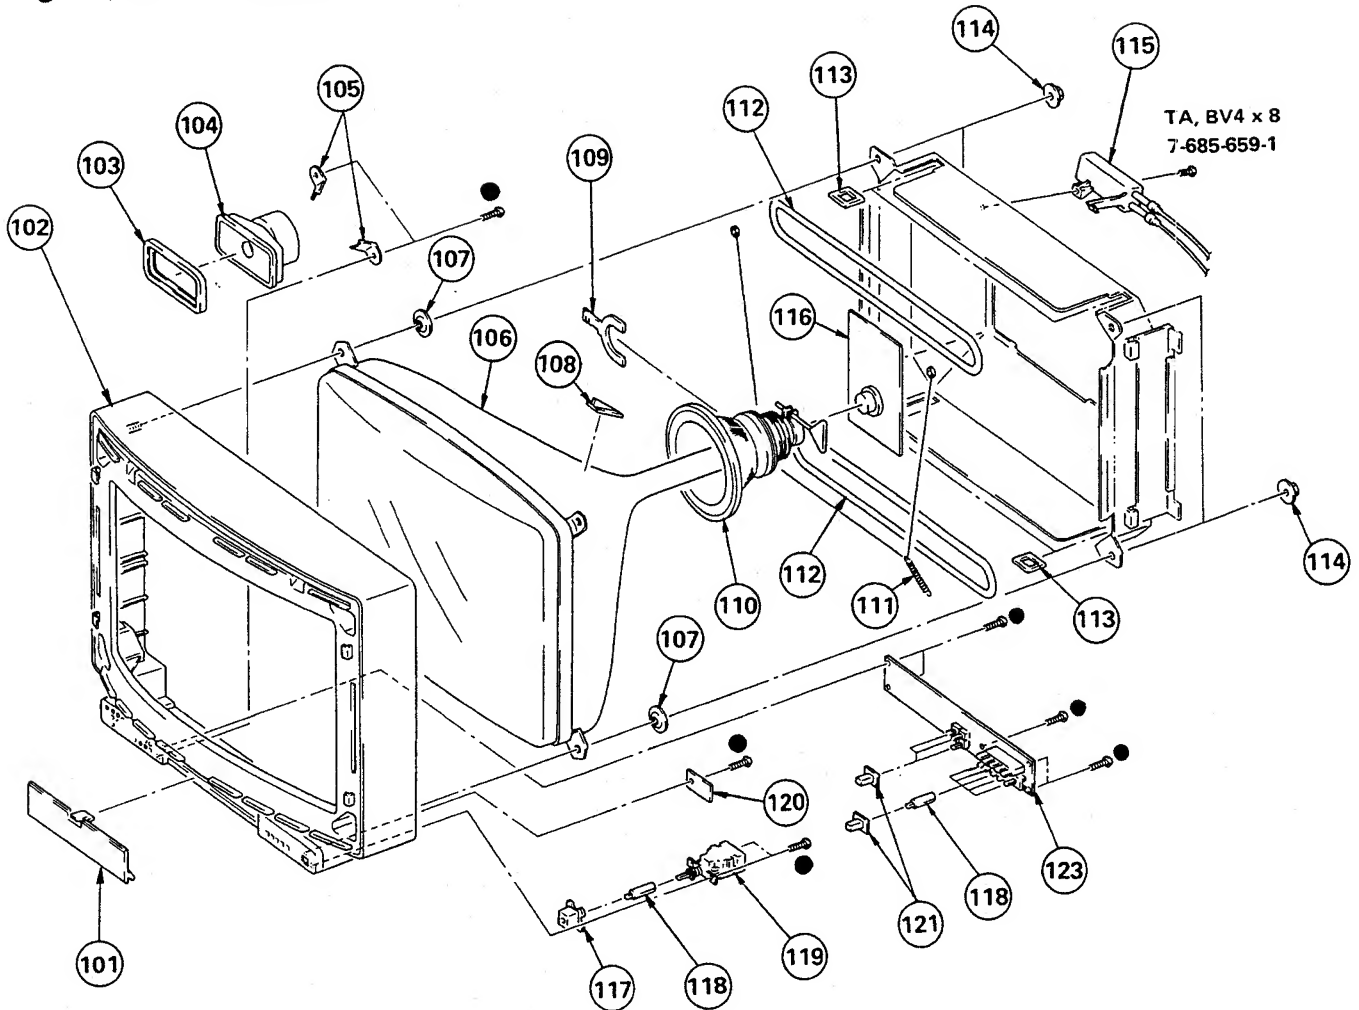

No.	Part No.	Description	Remark
101	X-4370-907-1	DOOR ASSY	
102	X-4363-306-1	BEZEL ASSY	103, 104, 105
103	▲4-364-741-00	CUSHION, SPEAKER	
104	1-503-109-00	SPEAKER	
105	▲4-321-611-00	CLAW, RETAINING, SPEAKER	
106	▲8-737-251-05	CRT A49JHT00X	
107	4-348-567-00	WASHER, CRT POSITION	
108	3-703-003-00	SPACER, DY	
109	1-452-146-00	BMC MAGNET	
110	▲1-451-204-61	DEFLECTION YOKE (SY-108B)	
111	4-303-774-XX	SPRING	
112	▲1-426-087-41	COIL, DEGAUSSING	

No.	Part No.	Description	Remark
113	▲4-322-922-00	HOLDER, COIL, DEGAUSSER	
114	4-306-034-00	FLANGE NUT, (B) 5MM	
115	▲1-228-482-00	RESISTOR ASSY, HIGH-VOLTAGE	
116	▲A-1330-507-A	C1 BOARD, COMPLETE	
117	4-346-409-11	BUTTON, POWER	
118	▲4-370-903-01	SHAFT, BUTTON	
119	▲1-552-503-00	SWITCH, PUSH	
120	▲1-612-249-11	X BOARD	
121	4-369-627-01	PUSH BUTTON	
123	▲1-612-248-11	H BOARD	

The components identified by shading and mark ▲ are critical for safety. Replace only with part number specified.



B

Ref.No	Part No.	Description	Remark	Ref.No	Part No.	Description	Remark
C106	1-123-356-00	ELECT	10MF 20% 25V	C166	1-101-888-00	CERAMIC	68PF 5% 50V
C107	1-102-978-00	CERAMIC	220PF 5% 50V	C167	1-101-006-00	CERAMIC	0.047MF 50V
C108	1-123-356-00	ELECT	10MF 20% 16V	C169	1-108-389-00	MYLAR	0.1MF 10% 100V
C109	1-102-959-00	CERAMIC	22PF 5% 50V	C170	1-123-380-00	ELECT	1MF 20% 50V
C110	1-102-961-00	CERAMIC	27PF 5% 50V	C172	1-101-888-00	CERAMIC	68PF 5% 50V
C111	1-101-888-00	CERAMIC	68PF 5% 50V	C173	1-123-607-00	ELECT	0.1MF 20% 50V
C112	1-102-971-00	CERAMIC	82PF 5% 50V	C175	1-101-361-00	CERAMIC	150PF 5% 50V
C113	1-102-978-00	CERAMIC	220PF 5% 50V	C176	1-102-951-00	CERAMIC	15PF 5% 50V
C114	1-123-332-00	ELECT	47MF 20% 16V	C177	1-101-888-00	CERAMIC	68PF 5% 50V
C115	1-123-356-00	ELECT	10MF 20% 16V	C178	1-123-356-00	ELECT	10MF 20% 25V
C117	1-123-356-00	ELECT	10MF 20% 25V	C179	1-101-004-00	CERAMIC	0.01MF 50V
C119	1-102-944-00	CERAMIC	7PF 0.5PF 50V	C180	1-123-323-00	ELECT	470MF 20% 16V
C120	1-102-944-00	CERAMIC	7PF 0.5PF 50V	C183	1-123-379-00	ELECT	0.47MF 20% 50V
C121	1-102-944-00	CERAMIC	7PF 0.5PF 50V	C184	1-123-356-00	ELECT	10MF 20% 25V
C122	1-102-944-00	CERAMIC	7PF 0.5PF 50V	C186	1-123-356-00	ELECT	10MF 20% 25V
C123	1-123-380-00	ELECT	1MF 20% 50V	C187	1-101-004-00	CERAMIC	0.01MF 50V
C124	1-123-356-00	ELECT	10MF 20% 25V	C188	1-123-356-00	ELECT	10MF 20% 25V
C127	1-101-004-00	CERAMIC	0.01MF 50V	C189	1-123-356-00	ELECT	10MF 20% 25V
C128	1-123-380-00	ELECT	1MF 20% 50V	C190	1-123-356-00	ELECT	10MF 20% 25V
C129	1-123-379-00	ELECT	0.47MF 20% 50V	C200	1-123-607-00	ELECT	0.1MF 20% 50V
C130	1-123-380-00	ELECT	1MF 20% 50V	C201	1-123-607-00	ELECT	0.1MF 20% 50V
C131	1-108-389-00	MYLAR	0.1MF 10% 100V	C202	1-123-607-00	ELECT	0.1MF 20% 50V
C132	1-108-389-00	MYLAR	0.1MF 10% 100V	C203	1-121-257-00	ELECT	4.7MF 16V
C133	1-123-332-00	ELECT	47MF 16V	C204	1-123-381-00	ELECT	2.2MF 20% 50V
C134	1-102-944-00	CERAMIC	7PF 0.5PF 50V	C205	1-102-525-00	CERAMIC	68PF 5% 50V
		(Serial No.up to 204,000)		C206	1-102-892-00	CERAMIC	22PF 5% 50V
	1-101-880-00	CERAMIC	47PF 5% 50V	C207	1-102-679-00	CERAMIC	120PF 5% 50V
		(Serial No. 204,001 and later)		C208	1-101-880-00	CERAMIC	47PF 5% 50V
C135	1-101-004-00	CERAMIC	0.01MF 50V	C209	1-102-971-00	CERAMIC	82PF 5% 50V
C136	1-101-880-00	CERAMIC	47PF 5% 50V	C210	1-101-361-00	CERAMIC	150PF 5% 50V
C137	1-102-959-00	CERAMIC	22PF 5% 50V	C211	1-108-377-00	MYLAR	0.01MF 10% 100V
C138	1-101-004-00	CERAMIC	0.01MF 50V	C212	1-123-356-00	ELECT	10MF 20% 25V
C139	1-108-579-00	MYLAR	0.01MF 5% 50V	C213	1-101-004-00	CERAMIC	0.01MF 50V
C140	1-123-381-00	ELECT	2.2MF 20% 50V	C214	1-108-579-00	MYLAR	0.01MF 5% 50V
C141	1-161-025-00	CERAMIC	0.1MF 10% 25V	C215	1-102-892-00	CERAMIC	22PF 5% 50V
C142	1-161-025-00	CERAMIC	0.1MF 10% 25V	C216	1-102-824-00	CERAMIC	470PF 5% 50V
C143	1-101-880-00	CERAMIC	47PF 5% 50V	C217	1-123-356-00	ELECT	10MF 20% 25V
C144	1-101-880-00	CERAMIC	47PF 5% 50V	C220	1-123-325-00	ELECT	2200MF 20% 16V
C145	1-102-934-00	CERAMIC	1PF 0.25PF 50V	C221	1-108-389-00	MYLAR	0.1MF 10% 100V
C146	1-102-963-00	CERAMIC	33PF 5% 50V	C222	1-123-321-00	ELECT	220MF 20% 16V
C147	1-101-004-00	CERAMIC	0.01MF 50V	C223	1-123-332-00	ELECT	47MF 20% 16V
C148	1-123-356-00	ELECT	10MF 20% 25V	C224	1-123-369-00	ELECT	4.7MF 20% 25V
C150	1-101-004-00	CERAMIC	0.01MF 50V	C225	1-123-380-00	ELECT	1MF 20% 50V
C151	1-101-004-00	CERAMIC	0.01MF 50V	C226	1-102-125-00	CERAMIC	0.0047MF 10% 50V
C152	1-101-004-00	CERAMIC	0.01MF 50V	C227	1-123-379-00	ELECT	0.47MF 20% 50V
C153	1-106-204-00	MYLAR	0.022MF 10% 100V	C228	1-123-332-00	ELECT	47MF 20% 25V
C155	1-102-946-00	CERAMIC	9PF 0.5PF 50V	C229	1-123-369-00	ELECT	4.7MF 20% 25V
C157	1-123-380-00	ELECT	1MF 20% 50V	C230	1-102-824-00	CERAMIC	470PF 5% 50V
C158	1-123-382-00	ELECT	3.3MF 20% 50V	C231	1-123-356-00	ELECT	10MF 20% 16V
C159	1-124-049-00	ELECT	0.47MF 20% 50V	C232	1-123-356-00	ELECT	10MF 20% 16V
C160	1-102-115-00	CERAMIC	560PF 10% 50V	C233	1-123-379-00	ELECT	0.47MF 20% 50V
C161	1-102-971-00	CERAMIC	82PF 5% 50V	C234	1-108-377-00	MYLAR	0.01MF 10% 100V
C162	1-101-361-00	CERAMIC	150PF 5% 50V	C235	1-123-321-00	ELECT	220MF 20% 16V
C163	1-102-971-00	CERAMIC	82PF 5% 50V				
C164	1-121-257-00	ELECT	4.7MF 16V				
C165	1-101-361-00	CERAMIC	150PF 5% 50V				

B

Ref.No	Part No.	Description	Remark	Ref.No	Part No.	Description	Remark
C236	1-101-004-00	CERAMIC 0.01MF	50V	IC103	8-759-113-65	IC UPC1365C	
C237	1-161-330-00	CERAMIC 0.01MF	30% 25V	IC104	8-759-240-24	IC TC4024BP	
C238	1-123-332-00	ELECT 47MF	20% 16V	IC105	8-759-240-23	IC TC4023BP	
C239	1-101-004-00	CERAMIC 0.01MF	50V	IC201	8-759-100-15	IC UPC1364C2	
C240	1-102-959-00	CERAMIC 22PF	5% 50V	IC202	8-759-101-77	IC UPC1241H	
C241	1-102-959-00	CERAMIC 22PF	5% 50V	IC203	8-759-610-95	IC CX095E	
C242	1-123-356-00	ELECT 10MF	20% 25V				
C243	1-101-004-00	CERAMIC 0.01MF	50V				
C244	1-101-004-00	CERAMIC 0.01MF	50V				
C343	1-101-004-00	CERAMIC 0.01MF	50V				
<u>DIODE</u>				<u>CONNECTOR</u>			
D001	8-719-911-19	DIODE 1SS119		J1	1-562-121-00	CONNECTOR, DIN 6P	
D002	8-719-911-19	DIODE 1SS119		J2	1-536-842-11	TERMINAL BOARD, INPUT/OUTPUT (A)	
D003	8-719-911-19	DIODE 1SS119					
D004	8-719-911-19	DIODE 1SS119					
D005	8-719-911-19	DIODE 1SS119					
D007	8-719-911-19	DIODE 1SS119					
D101	8-719-911-19	DIODE 1SS119					
D102	8-719-911-19	DIODE 1SS119					
D103	8-719-981-01	DIODE ERA81-004					
D104	8-719-911-19	DIODE 1SS119					
D105	8-719-911-19	DIODE 1SS119					
D106	8-719-911-19	DIODE 1SS119					
D107	8-719-911-19	DIODE 1SS119					
D108	8-719-911-19	DIODE 1SS119					
D109	8-719-911-19	DIODE 1SS119					
D110	8-719-911-19	DIODE 1SS119					
D111	8-719-911-19	DIODE 1SS119					
D112	8-719-911-19	DIODE 1SS119					
D113	8-719-911-19	DIODE 1SS119					
D114	8-719-911-19	DIODE 1SS119					
D115	8-719-911-19	DIODE 1SS119					
D116	8-719-911-19	DIODE 1SS119					
D117	8-719-911-19	DIODE 1SS119					
D118	8-719-911-19	DIODE 1SS119					
D119	8-719-911-19	DIODE 1SS119					
D120	8-719-911-19	DIODE 1SS119					
D121	8-719-911-19	DIODE 1SS119					
D122	8-719-911-19	DIODE 1SS119					
D123	8-719-911-19	DIODE 1SS119					
D124	8-719-100-37	DIODE RD6.2E-B1					
D125	8-719-911-19	DIODE 1SS119					
<u>DELAY LINE</u>				<u>COIL</u>			
DL101	1-415-207-21	DELAY LINE (1H)		L101	1-408-412-00	MICRO INDUCTOR 18UH	
DL102	1-415-188-00	DELAY LINE		L102	1-408-412-00	MICRO INDUCTOR 18UH	
DL103	1-415-122-31	DELAY LINE		L103	1-408-411-00	MICRO INDUCTOR 15UH	
<u>IC</u>				L104	1-408-414-00	MICRO INDUCTOR 27UH	
IC001	8-759-700-06	IC UPC7812H		L105	1-408-414-00	MICRO INDUCTOR 27UH	
IC101	8-752-006-10	IC CX20061		L106	1-408-409-00	MICRO INDUCTOR 10UH	
IC102	8-752-006-10	IC CX20061		L107	1-408-407-00	MICRO INDUCTOR 6.8UH	
				L108	1-408-416-00	MICRO INDUCTOR 39UH	
				L110	1-408-412-00	MICRO INDUCTOR 18UH	
				L111	1-408-406-00	MICRO INDUCTOR 5.6UH	
				L112	1-408-408-00	MICRO INDUCTOR 8.2UH	
				L113	1-408-415-00	MICRO INDUCTOR 33UH	
				L201	1-408-245-00	MICRO INDUCTOR 22MMH	
				L202	1-408-163-00	MICRO INDUCTOR 5.6MMH	
				L203	1-408-414-00	MICRO INDUCTOR 27UH	
				L204	1-408-421-00	MICRO INDUCTOR 100UH	
				<u>TRANSISTOR</u>			
				Q001	8-729-245-83	TRANSISTOR 2SC2458	
				Q002	8-729-204-83	TRANSISTOR 2SA1048-GR	
				Q003	8-729-204-83	TRANSISTOR 2SA1048-GR	
				Q004	8-729-204-83	TRANSISTOR 2SA1048-GR	
				Q005	8-729-245-83	TRANSISTOR 2SC2458	
				Q006	8-729-204-83	TRANSISTOR 2SA1048-GR	
				Q007	8-729-204-83	TRANSISTOR 2SA1048-GR	
				Q008	8-729-245-83	TRANSISTOR 2SC2458	
				Q009	8-729-204-83	TRANSISTOR 2SA1048-GR	
				Q010	8-729-245-83	TRANSISTOR 2SC2458	
				Q011	8-729-245-83	TRANSISTOR 2SC2458	
				Q012	8-729-204-83	TRANSISTOR 2SA1048-GR	
				Q101	8-729-245-83	TRANSISTOR 2SC2458	
				Q102	8-729-245-83	TRANSISTOR 2SC2458	
				Q103	8-729-245-83	TRANSISTOR 2SC2458	
				Q104	8-729-245-83	TRANSISTOR 2SC2458	
				Q105	8-729-245-83	TRANSISTOR 2SC2458	
				Q106	8-729-245-83	TRANSISTOR 2SC2458	
				Q107	8-729-245-83	TRANSISTOR 2SC2458	
				Q108	8-729-245-83	TRANSISTOR 2SC2458	
				Q109	8-729-204-83	TRANSISTOR 2SA1048-GR	

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauritron.co.uk

B

Ref.No	Part No.	Description	Remark	Ref.No	Part No.	Description	Remark
Q110	8-729-245-83	TRANSISTOR 2SC2458		R010	1-247-850-00	CARBON 6.2K 5% 1/6W	
Q111	8-729-245-83	TRANSISTOR 2SC2458		R011	1-247-850-00	CARBON 6.2K 5% 1/6W	
Q113	8-729-245-83	TRANSISTOR 2SC2458		R012	1-247-871-00	CARBON 47K 5% 1/6W	
Q116	8-729-204-83	TRANSISTOR 2SA1048-GR		R013	1-247-877-00	CARBON 82K 5% 1/6W	
Q117	8-729-245-83	TRANSISTOR 2SC2458		R014	1-247-885-00	CARBON 180K 5% 1/6W	
Q118	8-729-245-83	TRANSISTOR 2SC2458		R015	1-247-873-00	CARBON 56K 5% 1/6W	
Q120	8-729-245-83	TRANSISTOR 2SC2458		R016	1-247-831-00	CARBON 1K 5% 1/6W	
Q121	8-729-204-83	TRANSISTOR 2SA1048-GR		R017	1-247-804-00	CARBON 75 5% 1/6W	
Q122	8-729-245-83	TRANSISTOR 2SC2458		R019	1-247-804-00	CARBON 75 5% 1/6W	
Q123	8-729-245-83	TRANSISTOR 2SC2458		R020	1-247-865-00	CARBON 27K 5% 1/6W	
Q124	8-729-115-30	TRANSISTOR 2SK105A-30		R021	1-247-845-00	CARBON 3.9K 5% 1/6W	
Q125	8-729-245-83	TRANSISTOR 2SC2458		R022	1-247-863-00	CARBON 22K 5% 1/6W	
Q126	8-729-115-30	TRANSISTOR 2SK105A-30		R023	1-247-875-00	CARBON 68K 5% 1/6W	
Q127	8-729-115-30	TRANSISTOR 2SK105A-30		R024	1-247-850-00	CARBON 6.2K 5% 1/6W	
Q128	8-769-115-30	TRANSISTOR 2SK105A-30		R025	1-247-871-00	CARBON 47K 5% 1/6W	
Q129	8-729-245-83	TRANSISTOR 2SC2458		R026	1-247-873-00	CARBON 56K 5% 1/6W	
Q130	8-729-245-83	TRANSISTOR 2SC2458		R027	1-247-877-00	CARBON 82K 5% 1/6W	
Q131	8-729-115-30	TRANSISTOR 2SK105A-30		R028	1-247-885-00	CARBON 180K 5% 1/6W	
Q132	8-729-115-30	TRANSISTOR 2SK105A-30		R029	1-247-855-00	CARBON 10K 5% 1/6W	
Q133	8-729-245-83	TRANSISTOR 2SC2458		R030	1-247-885-00	CARBON 180K 5% 1/6W	
Q135	8-729-204-83	TRANSISTOR 2SA1048-GR		R031	1-247-877-00	CARBON 82K 5% 1/6W	
Q136	8-729-204-83	TRANSISTOR 2SA1048-GR		R032	1-247-871-00	CARBON 47K 5% 1/6W	
Q137	8-729-204-83	TRANSISTOR 2SA1048-GR		R033	1-247-863-00	CARBON 22K 5% 1/6W	
Q138	8-729-204-83	TRANSISTOR 2SA1048-GR		R034	1-247-875-00	CARBON 68K 5% 1/6W	
Q139	8-729-245-83	TRANSISTOR 2SC2458		R035	1-247-831-00	CARBON 1K 5% 1/6W	
Q140	8-729-204-83	TRANSISTOR 2SA1048-GR		R036	1-247-804-00	CARBON 75 5% 1/6W	
Q141	8-729-204-83	TRANSISTOR 2SA1048-GR		R037	1-247-865-00	CARBON 27K 5% 1/6W	
Q142	8-729-204-83	TRANSISTOR 2SA1048-GR		R038	1-247-845-00	CARBON 3.9K 5% 1/6W	
Q143	8-729-204-83	TRANSISTOR 2SA1048-GR		R039	1-247-850-00	CARBON 6.2K 5% 1/6W	
Q144	8-729-245-83	TRANSISTOR 2SC2458		R040	1-247-875-00	CARBON 68K 5% 1/6W	
Q145	8-729-245-83	TRANSISTOR 2SC2458		R041	1-247-804-00	CARBON 75 5% 1/6W	
Q148	8-729-245-83	TRANSISTOR 2SC2458		R042	1-247-865-00	CARBON 27K 5% 1/6W	
Q149	8-729-204-83	TRANSISTOR 2SA1048-GR		R043	1-247-878-00	CARBON 91K 5% 1/6W	
Q150	8-729-204-83	TRANSISTOR 2SA1048-GR		R045	1-247-855-00	CARBON 10K 5% 1/6W	
Q151	8-729-245-83	TRANSISTOR 2SC2458		R046	1-247-853-00	CARBON 8.2K 5% 1/6W	
Q152	8-729-245-83	TRANSISTOR 2SC2458		R049	1-247-873-00	CARBON 56K 5% 1/6W	
Q153	8-729-245-83	TRANSISTOR 2SC2458		R051	1-247-839-00	CARBON 2.2K 5% 1/6W	
Q154	8-729-178-54	TRANSISTOR 2SC2458		R052	1-247-807-00	CARBON 100 5% 1/6W	
Q155	8-729-245-83	TRANSISTOR 2SC2458		R053	1-247-871-00	CARBON 47K 5% 1/6W	
Q156	8-729-245-83	TRANSISTOR 2SC2458		R054	1-247-871-00	CARBON 47K 5% 1/6W	
Q157	8-729-245-83	TRANSISTOR 2SC2458		R055	1-247-877-00	CARBON 82K 5% 1/6W	
Q158	8-769-115-30	TRANSISTOR 2SK105A-30		R056	1-246-501-00	CARBON 15K 5% 1/4W	
Q159	8-729-204-83	TRANSISTOR 2SA1048-GR		R100	1-247-853-00	CARBON 8.2K 5% 1/6W	
RESISTOR				R101	1-247-869-00	CARBON 39K 5% 1/6W	
R001	1-247-020-00	CARBON 1 5% 1/8W F		R102	1-247-815-00	CARBON 220 5% 1/6W	
R002	1-247-831-00	CARBON 1K 5% 1/6W		R103	1-247-833-00	CARBON 1.2K 5% 1/6W	
R003	1-247-865-00	CARBON 27K 5% 1/6W		R104	1-247-819-00	CARBON 330 5% 1/6W	
R004	1-247-845-00	CARBON 3.9K 5% 1/6W		R105	1-247-827-00	CARBON 680 5% 1/6W	
R005	1-247-839-00	CARBON 2.2K 5% 1/6W		R106	1-247-843-00	CARBON 3.3K 5% 1/6W	
R006	1-247-875-00	CARBON 68K 5% 1/6W		R107	1-247-849-00	CARBON 5.6K 5% 1/6W	
R007	1-247-863-00	CARBON 22K 5% 1/6W		R108	1-247-855-00	CARBON 10K 5% 1/6W	
R009	1-247-850-00	CARBON 6.2K 5% 1/6W		R109	1-247-823-00	CARBON 470 5% 1/6W	
				R110	1-247-823-00	CARBON 470 5% 1/6W	

B

Ref.No	Part No.	Description	Remark	Ref.No	Part No.	Description	Remark
R111	1-247-839-00	CARBON	2.2K 5% 1/6W	R171	1-247-879-00	CARBON	100K 5% 1/6W
R112	1-247-827-00	CARBON	680 5% 1/6W	R173	1-247-847-00	CARBON	4.7K 5% 1/6W
R113	1-247-817-00	CARBON	270 5% 1/6W	R176	1-247-887-00	CARBON	220K 5% 1/6W
R114	1-247-827-00	CARBON	680 5% 1/6W	R177	1-247-879-00	CARBON	100K 5% 1/6W
R115	1-247-835-00	CARBON	1.5K 5% 1/6W	R178	1-247-883-00	CARBON	150K 5% 1/6W
R116	1-247-803-00	CARBON	68 5% 1/6W	R179	1-247-875-00	CARBON	68K 5% 1/6W
R117	1-247-827-00	CARBON	680 5% 1/6W	R180	1-247-831-00	CARBON	1K 5% 1/6W
R118	1-247-827-00	CARBON	680 5% 1/6W	R181	1-247-855-00	CARBON	10K 5% 1/6W
R119	1-247-807-00	CARBON	100 5% 1/6W	R182	1-247-871-00	CARBON	47K 5% 1/6W
R120	1-247-827-00	CARBON	680 5% 1/6W	R183	1-247-843-00	CARBON	3.3K 5% 1/6W
R121	1-247-827-00	CARBON	680 5% 1/6W	R184	1-247-833-00	CARBON	1.2K 5% 1/6W
R122	1-247-807-00	CARBON	100 5% 1/6W	R185	1-247-877-00	CARBON	82K 5% 1/6W
R123	1-247-831-00	CARBON	1K 5% 1/6W	R186	1-247-823-00	CARBON	470 5% 1/6W
R124	1-247-823-00	CARBON	470 5% 1/6W	R187	1-247-865-00	CARBON	27K 5% 1/6W
R125	1-247-831-00	CARBON	1K 5% 1/6W	R188	1-247-867-00	CARBON	33K 5% 1/6W
R126	1-247-807-00	CARBON	100 5% 1/6W	R189	1-247-875-00	CARBON	68K 5% 1/6W
R127	1-247-827-00	CARBON	680 5% 1/6W	R190	1-247-867-00	CARBON	33K 5% 1/6W
R128	1-247-814-00	CARBON	200 5% 1/6W	R191	1-247-871-00	CARBON	47K 5% 1/6W
R129	1-247-835-00	CARBON	1.5K 5% 1/6W	R192	1-247-839-00	CARBON	2.2K 5% 1/6W
R130	1-247-827-00	CARBON	680 5% 1/6W	R193	1-247-845-00	CARBON	3.9K 5% 1/6W
R131	1-247-823-00	CARBON	470 5% 1/6W	R194	1-247-859-00	CARBON	15K 5% 1/6W
R132	1-247-837-00	CARBON	1.8K 5% 1/6W	R195	1-247-839-00	CARBON	2.2K 5% 1/6W
R133	1-247-799-00	CARBON	47 5% 1/6W	R196	1-247-865-00	CARBON	27K 5% 1/6W
R135	1-247-815-00	CARBON	220 5% 1/6W	R197	1-247-827-00	CARBON	680 5% 1/6W
R136	1-247-839-00	CARBON	2.2K 5% 1/6W	R198	1-247-827-00	CARBON	680 5% 1/6W
R137	1-247-861-00	CARBON	18K 5% 1/6W	R199	1-247-831-00	CARBON	1K 5% 1/6W
R138	1-247-843-00	CARBON	3.3K 5% 1/6W	R200	1-247-879-00	CARBON	100K 5% 1/6W
R139	1-247-855-00	CARBON	10K 5% 1/6W	R201	1-247-903-00	CARBON	1M 5% 1/6W
R140	1-247-863-00	CARBON	22K 5% 1/6W	R202	1-247-903-00	CARBON	1M 5% 1/6W
R141	1-247-863-00	CARBON	22K 5% 1/6W	R203	1-247-855-00	CARBON	10K 5% 1/6W
R143	1-247-807-00	CARBON	100 5% 1/6W	R204	1-247-855-00	CARBON	10K 5% 1/6W
R144	1-247-863-00	CARBON	22K 5% 1/6W	R205	1-247-855-00	CARBON	10K 5% 1/6W
R145	1-247-863-00	CARBON	22K 5% 1/6W	R206	1-247-875-00	CARBON	68K 5% 1/6W
R147	1-247-835-00	CARBON	1.5K 5% 1/6W	R207	1-247-815-00	CARBON	220 5% 1/6W
R148	1-247-835-00	CARBON	1.5K 5% 1/6W	R208	1-247-855-00	CARBON	10K 5% 1/6W
R149	1-247-863-00	CARBON	22K 5% 1/6W	R209	1-247-867-00	CARBON	33K 5% 1/6W
R150	1-247-829-00	CARBON	820 5% 1/6W	R210	1-247-815-00	CARBON	220 5% 1/6W
R151	1-247-823-00	CARBON	470 5% 1/6W	R211	1-247-815-00	CARBON	220 5% 1/6W
R152	1-247-829-00	CARBON	820 5% 1/6W	R212	1-247-845-00	CARBON	3.9K 5% 1/6W
R153	1-247-843-00	CARBON	3.3K 5% 1/6W	R213	1-247-815-00	CARBON	220 5% 1/6W
R154	1-247-863-00	CARBON	22K 5% 1/6W	R214	1-247-815-00	CARBON	220 5% 1/6W
R155	1-247-855-00	CARBON	10K 5% 1/6W	R215	1-247-847-00	CARBON	4.7K 5% 1/6W
R156	1-247-867-00	CARBON	33K 5% 1/6W	R216	1-247-879-00	CARBON	100K 5% 1/6W
R157	1-247-867-00	CARBON	33K 5% 1/6W	R217	1-247-879-00	CARBON	100K 5% 1/6W
R158	1-247-875-00	CARBON	68K 5% 1/6W	R218	1-247-855-00	CARBON	10K 5% 1/6W
R159	1-247-827-00	CARBON	680 5% 1/6W	R219	1-247-849-00	CARBON	5.6K 5% 1/6W
R160	1-247-869-00	CARBON	39K 5% 1/6W	R220	1-247-867-00	CARBON	33K 5% 1/6W
R161	1-247-855-00	CARBON	10K 5% 1/6W	R221	1-247-869-00	CARBON	39K 5% 1/6W
R162	1-247-871-00	CARBON	47K 5% 1/6W	R222	1-247-875-00	CARBON	68K 5% 1/6W
R165	1-247-903-00	CARBON	1M 5% 1/6W	R223	1-247-849-00	CARBON	5.6K 5% 1/6W
R167	1-247-835-00	CARBON	1.5K 5% 1/6W	R224	1-247-891-00	CARBON	330K 5% 1/6W
R168	1-247-867-00	CARBON	33K 5% 1/6W	R225	1-247-879-00	CARBON	100K 5% 1/6W
R170	1-247-859-00	CARBON	15K 5% 1/6W	R226	1-247-878-00	CARBON	91K 5% 1/6W

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY

Tel:- 01844-351694 Fax:- 01844-352554  
Email:- enquiries@mauratron.co.uk

B

Ref.No	Part No.	Description	Remark	Ref.No	Part No.	Description	Remark
R228	1-247-835-00	CARBON	1.5K 5% 1/6W	R283	1-247-847-00	CARBON	4.7K 5% 1/6W
R230	1-247-847-00	CARBON	4.7K 5% 1/6W	R284	1-247-853-00	CARBON	8.2K 5% 1/6W
R231	1-247-873-00	CARBON	56K 5% 1/6W	R285	1-247-843-00	CARBON	3.3K 5% 1/6W
R232	1-247-821-00	CARBON	390 5% 1/6W	R286	1-247-843-00	CARBON	3.3K 5% 1/6W
R233	1-247-815-00	CARBON	220 5% 1/6W	R287	1-247-903-00	CARBON	1M 5% 1/6W
R234	1-247-815-00	CARBON	220 5% 1/6W	R288	1-247-879-00	CARBON	100K 5% 1/6W
R235	1-247-823-00	CARBON	470 5% 1/6W	R290	1-247-855-00	CARBON	10K 5% 1/6W
R236	1-247-807-00	CARBON	100 5% 1/6W	R291	1-247-855-00	CARBON	10K 5% 1/6W
R237	1-247-815-00	CARBON	220 5% 1/6W	R292	1-246-401-00	CARBON	1 5% 1/4W
R238	1-247-867-00	CARBON	33K 5% 1/6W	R293	1-247-841-00	CARBON	2.7K 5% 1/6W
R239	1-247-877-00	CARBON	82K 5% 1/6W	R294	1-247-807-00	CARBON	100 5% 1/6W
R240	1-247-838-00	CARBON	2K 5% 1/6W	R295	1-247-847-00	CARBON	4.7K 5% 1/6W
R241	1-247-863-00	CARBON	22K 5% 1/6W	R296	1-246-521-00	CARBON	100K 5% 1/4W
R242	1-247-854-00	CARBON	9.1K 5% 1/6W	R297	1-247-871-00	CARBON	47K 5% 1/6W
R243	1-247-857-00	CARBON	12K 5% 1/6W	R298	1-247-871-00	CARBON	47K 5% 1/6W
R244	1-247-843-00	CARBON	3.3K 5% 1/6W	R299	1-247-823-00	CARBON	470 5% 1/6W
R245	1-247-849-00	CARBON	5.6K 5% 1/6W	R301	1-247-658-00	CARBON	47 5% 1/4W F
R246	1-247-855-00	CARBON	10K 5% 1/6W	R302	1-247-871-00	CARBON	47K 5% 1/6W
R247	1-247-859-00	CARBON	15K 5% 1/6W	R303	1-247-831-00	CARBON	1K 5% 1/6W
R248	1-247-839-00	CARBON	2.2K 5% 1/6W	R304	1-247-831-00	CARBON	1K 5% 1/6W
R249	1-247-871-00	CARBON	47K 5% 1/6W	R305	1-247-831-00	CARBON	1K 5% 1/6W
R250	1-247-885-00	CARBON	180K 5% 1/6W	R306	1-247-883-00	CARBON	150K 5% 1/6W
R251	1-247-849-00	CARBON	5.6K 5% 1/6W	R307	1-247-819-00	CARBON	330 5% 1/6W
R252	1-247-853-00	CARBON	8.2K 5% 1/6W	R308	1-247-865-00	CARBON	27K 5% 1/6W
R253	1-247-843-00	CARBON	3.3K 5% 1/6W	R309	1-247-815-00	CARBON	220 5% 1/6W
R254	1-247-855-00	CARBON	10K 5% 1/6W	R310	1-247-843-00	CARBON	3.3K 5% 1/6W
R255	1-247-831-00	CARBON	1K 5% 1/6W	R311	1-247-872-00	CARBON	51K 5% 1/6W
R256	1-247-853-00	CARBON	8.2K 5% 1/6W	R312	1-247-839-00	CARBON	2.2K 5% 1/6W
R258	1-247-839-00	CARBON	2.2K 5% 1/6W	R313	1-247-847-00	CARBON	4.7K 5% 1/6W
R259	1-247-853-00	CARBON	8.2K 5% 1/6W	R314	1-247-867-00	CARBON	33K 5% 1/6W
R260	1-247-875-00	CARBON	68K 5% 1/6W	R315	1-247-835-00	CARBON	1.5K 5% 1/6W
R261	1-247-855-00	CARBON	10K 5% 1/6W	R316	1-247-835-00	CARBON	1.5K 5% 1/6W
R262	1-247-879-00	CARBON	100K 5% 1/6W	R317	1-246-469-00	CARBON	680 5% 1/4W
R263	1-247-855-00	CARBON	10K 5% 1/6W	R318	1-247-813-00	CARBON	180 5% 1/6W
R264	1-247-875-00	CARBON	68K 5% 1/6W	R319	1-247-823-00	CARBON	470 5% 1/6W
R265	1-247-855-00	CARBON	10K 5% 1/6W	R322	1-247-851-00	CARBON	6.8K 5% 1/6W
R266	1-247-855-00	CARBON	10K 5% 1/6W	R324	1-246-473-00	CARBON	1K 5% 1/4W
R267	1-247-863-00	CARBON	22K 5% 1/6W	R325	1-247-855-00	CARBON	10K 5% 1/6W
R268	1-247-875-00	CARBON	68K 5% 1/6W	R326	1-247-845-00	CARBON	3.9K 5% 1/6W
R269	1-247-855-00	CARBON	10K 5% 1/6W	R328	1-247-838-00	CARBON	2K 5% 1/6W
R270	1-247-827-00	CARBON	680 5% 1/6W	R329	1-247-845-00	CARBON	3.9K 5% 1/6W
R271	1-246-521-00	CARBON	100K 5% 1/4W	R332	1-247-873-00	CARBON	56K 5% 1/6W
R272	1-246-517-00	CARBON	68K 5% 1/4W	R335	1-247-871-00	CARBON	47K 5% 1/6W
R273	1-246-545-00	CARBON	1M 5% 1/4W	R336	1-247-863-00	CARBON	22K 5% 1/6W
R274	1-246-513-00	CARBON	47K 5% 1/4W	R337	1-247-875-00	CARBON	68K 5% 1/6W
R275	1-247-855-00	CARBON	10K 5% 1/6W	R338	1-247-855-00	CARBON	10K 5% 1/6W
R276	1-247-859-00	CARBON	15K 5% 1/6W	R339	1-247-839-00	CARBON	2.2K 5% 1/6W
R277	1-247-829-00	CARBON	820 5% 1/6W	R340	1-247-815-00	CARBON	220 5% 1/6W
R278	1-247-849-00	CARBON	5.6K 5% 1/6W	R341	1-247-855-00	CARBON	10K 5% 1/6W
R279	1-246-509-00	CARBON	33K 5% 1/4W	R342	1-247-841-00	CARBON	2.7K 5% 1/6W
R280	1-247-871-00	CARBON	47K 5% 1/6W	R343	1-247-831-00	CARBON	1K 5% 1/6W
R281	1-247-859-00	CARBON	15K 5% 1/6W	R344	1-247-831-00	CARBON	1K 5% 1/6W
R282	1-247-839-00	CARBON	2.2K 5% 1/8W F				



**For Service Manuals Contact**  
**MAURITRON TECHNICAL SERVICES**  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: [enquiries@mauritron.co.uk](mailto:enquiries@mauritron.co.uk)

—63—

The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.

Q

Ref.No	Part No.	Description	Remark	Ref.No	Part No.	Description	Remark
Q407	8-729-204-83	TRANSISTOR 2SA1048-GR		R361	1-246-469-00	CARBON 680 5%	1/4W
Q408	8-729-204-83	TRANSISTOR 2SA1048-GR		R362	1-246-469-00	CARBON 680 5%	1/4W
Q409	8-729-245-83	TRANSISTOR 2SC2458		R364	1-247-827-00	CARBON 680 5%	1/6W
Q410	8-729-204-83	TRANSISTOR 2SA1048-GR		R365	1-246-469-00	CARBON 680 5%	1/4W
Q411	8-729-245-83	TRANSISTOR 2SC2458		R366	1-246-457-00	CARBON 220 5%	1/4W
Q412	8-729-245-83	TRANSISTOR 2SC2458		R367	1-246-457-00	CARBON 220 5%	1/4W
Q413	8-729-245-83	TRANSISTOR 2SC2458		R368	1-247-855-00	CARBON 10K 5%	1/6W
Q414	8-729-204-83	TRANSISTOR 2SA1048-GR		R369	1-247-815-00	CARBON 220 5%	1/6W
Q415	8-729-245-83	TRANSISTOR 2SC2458		R370	1-247-815-00	CARBON 220 5%	1/6W
Q416	8-729-245-83	TRANSISTOR 2SC2458		R371	1-247-843-00	CARBON 3.3K 5%	1/6W
Q417	8-729-245-83	TRANSISTOR 2SC2458		R372	1-246-485-00	CARBON 3.3K 5%	1/4W
Q418	8-729-204-83	TRANSISTOR 2SA1048-GR		R373	1-246-537-00	CARBON 470K 5%	1/4W
Q419	8-729-245-83	TRANSISTOR 2SC2458		R374	1-247-871-00	CARBON 47K 5%	1/6W
Q420	8-729-245-83	TRANSISTOR 2SC2458		R377	1-247-845-00	CARBON 3.9K 5%	1/6W
Q421	8-729-245-83	TRANSISTOR 2SC2458		R378	1-247-855-00	CARBON 10K 5%	1/6W
Q422	8-729-245-83	TRANSISTOR 2SC2458		R379	1-246-469-00	CARBON 680 5%	1/4W
Q423	8-729-245-83	TRANSISTOR 2SC2458		R401	1-247-104-00	CARBON 75 5%	1/4W
Q424	8-729-204-83	TRANSISTOR 2SA1048-GR		R402	1-246-473-00	CARBON 1K 5%	1/4W
Q425	8-729-245-83	TRANSISTOR 2SC2458		R403	1-247-878-00	CARBON 91K 5%	1/6W
Q426	8-729-245-83	TRANSISTOR 2SC2458		R404	1-247-831-00	CARBON 1K 5%	1/6W
Q428	8-729-245-83	TRANSISTOR 2SC2458		R405	1-247-865-00	CARBON 27K 5%	1/6W
Q429	8-729-245-83	TRANSISTOR 2SC2458		R406	1-247-853-00	CARBON 8.2K 5%	1/6W
Q430	8-729-204-83	TRANSISTOR 2SA1048-GR		R407	1-247-831-00	CARBON 1K 5%	1/6W
Q431	8-729-245-83	TRANSISTOR 2SC2458		R408	1-247-104-00	CARBON 75 5%	1/4W
Q433	8-729-204-83	TRANSISTOR 2SA1048-GR		R409	1-246-473-00	CARBON 1K 5%	1/4W
Q434	8-729-245-83	TRANSISTOR 2SC2458		R410	1-247-878-00	CARBON 91K 5%	1/6W
Q435	8-729-245-83	TRANSISTOR 2SC2458		R411	1-247-831-00	CARBON 1K 5%	1/6W
Q442	8-729-245-83	TRANSISTOR 2SC2458		R412	1-247-865-00	CARBON 27K 5%	1/6W
Q443	8-729-245-83	TRANSISTOR 2SC2458		R413	1-247-853-00	CARBON 8.2K 5%	1/6W
Q444	8-729-245-83	TRANSISTOR 2SC2458		R414	1-247-831-00	CARBON 1K 5%	1/6W
Q445	8-729-204-83	TRANSISTOR 2SA1048-GR		R415	1-247-104-00	CARBON 75 5%	1/4W
Q446	8-729-204-83	TRANSISTOR 2SA1048-GR		R416	1-246-473-00	CARBON 1K 5%	1/4W
Q447	8-729-245-83	TRANSISTOR 2SC2458		R417	1-247-878-00	CARBON 91K 5%	1/6W
Q448	8-729-204-83	TRANSISTOR 2SA1048-GR		R418	1-247-831-00	CARBON 1K 5%	1/6W
Q449	8-729-245-83	TRANSISTOR 2SC2458		R419	1-247-865-00	CARBON 27K 5%	1/6W
Q450	8-729-204-83	TRANSISTOR 2SA1048-GR		R420	1-247-853-00	CARBON 8.2K 5%	1/6W
Q451	8-729-245-83	TRANSISTOR 2SC2458		R421	1-247-831-00	CARBON 1K 5%	1/6W
Q452	8-729-204-83	TRANSISTOR 2SA1048-GR		R422	1-246-515-00	CARBON 56K 5%	1/4W
Q453	8-729-245-83	TRANSISTOR 2SC2458		R423	1-247-885-00	CARBON 180K 5%	1/6W
Q454	8-729-204-83	TRANSISTOR 2SA1048-GR		R424	1-247-877-00	CARBON 82K 5%	1/6W
Q455	8-729-245-83	TRANSISTOR 2SC2458		R425	1-247-871-00	CARBON 47K 5%	1/6W
Q456	8-729-245-83	TRANSISTOR 2SC2458		R426	1-247-851-00	CARBON 6.8K 5%	1/6W
Q457	8-729-204-83	TRANSISTOR 2SA1048-GR		R427	1-247-847-00	CARBON 4.7K 5%	1/6W
<b>RESISTOR</b>				R428	1-246-515-00	CARBON 56K 5%	1/4W
R351	1-247-855-00	CARBON 10K 5%	1/6W	R429	1-247-885-00	CARBON 180K 5%	1/6W
R352	1-247-815-00	CARBON 220 5%	1/6W	R430	1-247-877-00	CARBON 82K 5%	1/6W
R353	1-247-855-00	CARBON 10K 5%	1/6W	R431	1-247-871-00	CARBON 47K 5%	1/6W
R354	1-247-815-00	CARBON 220 5%	1/6W	R432	1-247-851-00	CARBON 6.8K 5%	1/6W
R355	1-247-807-00	CARBON 100 5%	1/6W	R433	1-247-847-00	CARBON 4.7K 5%	1/6W
R356	1-246-469-00	CARBON 680 5%	1/4W	R434	1-247-807-00	CARBON 100 5%	1/6W
R357	1-246-469-00	CARBON 680 5%	1/4W	R435	1-247-879-00	CARBON 100K 5%	1/6W
R358	1-247-827-00	CARBON 680 5%	1/6W	R436	1-247-103-00	CARBON 68 5%	1/4W
R359	1-247-827-00	CARBON 680 5%	1/6W	R437	1-246-473-00	CARBON 1K 5%	1/4W

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel: 01844-351694 Fax: 01844-352554  
 Email: enquiries@mauritron.co.uk

Q

Ref.No	Part No.	Description	Remark			Ref.No	Part No.	Description	Remark		
R438	1-247-839-00	CARBON	2.2K	5%	1/6W	R495	1-247-863-00	CARBON	22K	5%	1/6W
R439	1-246-497-00	CARBON	10K	5%	1/4W	R496	1-247-871-00	CARBON	47K	5%	1/6W
R440	1-247-878-00	CARBON	91K	5%	1/6W	R497	1-247-855-00	CARBON	10K	5%	1/6W
R442	1-247-865-00	CARBON	27K	5%	1/6W	R499	1-247-819-00	CARBON	330	5%	1/6W
R443	1-247-853-00	CARBON	8.2K	5%	1/6W	R1401	1-247-839-00	CARBON	2.2K	5%	1/6W
R444	1-247-103-00	CARBON	68	5%	1/4W	R1402	1-247-831-00	CARBON	1K	5%	1/6W
R445	1-246-473-00	CARBON	1K	5%	1/4W	R1403	1-247-861-00	CARBON	18K	5%	1/6W
R446	1-247-839-00	CARBON	2.2K	5%	1/6W	R1404	1-247-845-00	CARBON	3.9K	5%	1/6W
R447	1-246-497-00	CARBON	10K	5%	1/4W	R1405	1-247-855-00	CARBON	10K	5%	1/6W
R448	1-247-878-00	CARBON	91K	5%	1/6W	R1406	1-247-843-00	CARBON	3.3K	5%	1/6W
R450	1-247-865-00	CARBON	27K	5%	1/6W	R1413	1-246-487-00	CARBON	3.9K	5%	1/4W
R451	1-247-853-00	CARBON	8.2K	5%	1/6W	R1414	1-246-465-00	CARBON	470	5%	1/4W
R452	1-247-103-00	CARBON	68	5%	1/4W	R1415	1-246-491-00	CARBON	5.6K	5%	1/4W
R453	1-246-473-00	CARBON	1K	5%	1/4W	R1417	1-247-823-00	CARBON	470	5%	1/6W
R454	1-247-839-00	CARBON	2.2K	5%	1/6W	R1419	1-247-835-00	CARBON	1.5K	5%	1/6W
R455	1-246-497-00	CARBON	10K	5%	1/4W	R1420	1-247-847-00	CARBON	4.7K	5%	1/6W
R456	1-247-878-00	CARBON	91K	5%	1/6W	R1421	1-247-831-00	CARBON	1K	5%	1/6W
R458	1-247-865-00	CARBON	27K	5%	1/6W	R1423	1-247-827-00	CARBON	680	5%	1/6W
R459	1-247-853-00	CARBON	8.2K	5%	1/6W	R1432	1-247-855-00	CARBON	10K	5%	1/6W
R460	1-247-107-00	CARBON	100	5%	1/4W	R1433	1-247-843-00	CARBON	3.3K	5%	1/6W
R461	1-247-839-00	CARBON	2.2K	5%	1/6W	R1434	1-247-848-00	CARBON	5.1K	5%	1/6W
R462	1-247-831-00	CARBON	1K	5%	1/6W	R1435	1-247-833-00	CARBON	1.2K	5%	1/6W
R463	1-247-845-00	CARBON	3.9K	5%	1/6W	R1436	1-247-859-00	CARBON	15K	5%	1/6W
R465	1-247-835-00	CARBON	1.5K	5%	1/6W	R1437	1-247-855-00	CARBON	10K	5%	1/6W
R466	1-247-819-00	CARBON	330	5%	1/6W	R1438	1-247-849-00	CARBON	5.6K	5%	1/6W
R467	1-247-829-00	CARBON	820	5%	1/6W	R1439	1-247-847-00	CARBON	4.7K	5%	1/6W
R468	1-247-835-00	CARBON	1.5K	5%	1/6W	R1441	1-247-863-00	CARBON	22K	5%	1/6W
R469	1-247-819-00	CARBON	330	5%	1/6W	R1442	1-247-901-00	CARBON	820K	5%	1/6W
R470	1-247-829-00	CARBON	820	5%	1/6W	R1443	1-247-901-00	CARBON	820K	5%	1/6W
R471	1-247-835-00	CARBON	1.5K	5%	1/6W	R1444	1-247-901-00	CARBON	820K	5%	1/6W
R472	1-247-819-00	CARBON	330	5%	1/6W	R1445	1-247-867-00	CARBON	33K	5%	1/6W
R473	1-247-829-00	CARBON	820	5%	1/6W	R1446	1-247-867-00	CARBON	33K	5%	1/6W
R474	1-247-847-00	CARBON	4.7K	5%	1/6W	R1447	1-246-527-00	CARBON	180K	5%	1/4W
R475	1-247-853-00	CARBON	8.2K	5%	1/6W	R1448	1-247-849-00	CARBON	5.6K	5%	1/6W
R476	1-247-831-00	CARBON	1K	5%	1/6W	R1449	1-247-839-00	CARBON	2.2K	5%	1/6W
R477	1-247-847-00	CARBON	4.7K	5%	1/6W	R1451	1-247-831-00	CARBON	1K	5%	1/6W
R478	1-247-847-00	CARBON	4.7K	5%	1/6W	R1452	1-247-843-00	CARBON	3.3K	5%	1/6W
R479	1-247-847-00	CARBON	4.7K	5%	1/6W	R1453	1-247-831-00	CARBON	1K	5%	1/6W
R480	1-247-103-00	CARBON	68	5%	1/4W	R1454	1-247-843-00	CARBON	3.3K	5%	1/6W
R481	1-246-481-00	CARBON	2.2K	5%	1/4W	R1455	1-247-839-00	CARBON	2.2K	5%	1/6W
R482	1-247-839-00	CARBON	2.2K	5%	1/6W	R1456	1-247-823-00	CARBON	470	5%	1/6W
R483	1-247-807-00	CARBON	100	5%	1/6W	R1457	1-247-839-00	CARBON	2.2K	5%	1/6W
R484	1-247-855-00	CARBON	10K	5%	1/6W	R1458	1-247-799-00	CARBON	47	5%	1/6W
R485	1-247-878-00	CARBON	91K	5%	1/6W	R1459	1-247-825-00	CARBON	560	5%	1/6W
R486	1-247-865-00	CARBON	27K	5%	1/6W	R1460	1-247-791-00	CARBON	22	5%	1/6W
R487	1-247-853-00	CARBON	8.2K	5%	1/6W	R1461	1-247-839-00	CARBON	2.2K	5%	1/6W
R488	1-246-457-00	CARBON	220	5%	1/4W	R1462	1-247-823-00	CARBON	470	5%	1/6W
R489	1-246-489-00	CARBON	4.7K	5%	1/4W	R1463	1-247-839-00	CARBON	2.2K	5%	1/6W
R490	1-247-835-00	CARBON	1.5K	5%	1/6W	R1464	1-247-799-00	CARBON	47	5%	1/6W
R491	1-247-839-00	CARBON	2.2K	5%	1/6W	R1465	1-247-825-00	CARBON	560	5%	1/6W
R492	1-247-829-00	CARBON	820	5%	1/6W	R1466	1-247-791-00	CARBON	22	5%	1/6W
R493	1-247-819-00	CARBON	330	5%	1/6W	R1467	1-247-839-00	CARBON	2.2K	5%	1/6W
R494	1-247-847-00	CARBON	4.7K	5%	1/6W	R1468	1-247-823-00	CARBON	470	5%	1/6W

Q C1

Ref.No	Part No.	Description	Remark				Ref.No	Part No.	Description	Remark			
R1469	1-247-839-00	CARBON	2.2K	5%	1/6W		C707	1-123-356-00	ELECT	10MF	20%	25V	
R1470	1-247-799-00	CARBON	47	5%	1/6W		C708	1-121-759-00	ELECT	4.7MF		250V	
R1471	1-247-825-00	CARBON	560	5%	1/6W		C709	1-102-038-00	CERAMIC	0.001MF		500V	
R1472	1-247-791-00	CARBON	22	5%	1/6W		C710	1-108-433-00	MYLAR	0.1MF	10%	200V	
R1473	1-247-853-00	CARBON	8.2K	5%	1/6W		C711	1-123-356-00	ELECT	10MF	20%	50V	
R1474	1-247-851-00	CARBON	6.8K	5%	1/6W		C712	1-129-737-00	FILM	0.047MF	20%	630V	
R1475	1-247-855-00	CARBON	10K	5%	1/6W		C713	1-102-249-00	CERAMIC	680PF	20%	2KV	
R1476	1-247-815-00	CARBON	220	5%	1/6W		C714	1-108-595-00	MYLAR	0.047MF	5%	50V	
R1477	1-247-815-00	CARBON	220	5%	1/6W								
R1478	1-247-815-00	CARBON	220	5%	1/6W								
R1479	1-247-847-00	CARBON	4.7K	5%	1/6W		D701	8-719-300-76	DIODE RH1A				
R1480	1-247-847-00	CARBON	4.7K	5%	1/6W		D702	8-719-300-76	DIODE RH1A				
R1481	1-247-831-00	CARBON	1K	5%	1/6W		D703	8-719-300-76	DIODE RH1A				
R1482	1-247-855-00	CARBON	10K	5%	1/6W								
R1483	1-247-855-00	CARBON	10K	5%	1/6W								
R1484	1-246-497-00	CARBON	10K	5%	1/4W		L701	1-408-418-00	MICRO INDUCTOR	56UH			
R1485	1-246-457-00	CARBON	220	5%	1/4W		L702	1-408-418-00	MICRO INDUCTOR	56UH			
R1486	1-246-497-00	CARBON	10K	5%	1/4W		L703	1-408-418-00	MICRO INDUCTOR	56UH			
R1487	1-246-457-00	CARBON	220	5%	1/4W		L704	1-408-417-00	MICRO INDUCTOR	47UH			
R1488	1-246-497-00	CARBON	10K	5%	1/4W		L705	1-407-780-00	COIL, SPOOK CHOKE				
							L706	1-408-417-00	MICRO INDUCTOR	47UH			
R1489	1-246-457-00	CARBON	220	5%	1/4W								
R1490	1-246-497-00	CARBON	10K	5%	1/4W								
R1492	1-246-457-00	CARBON	220	5%	1/4W								

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauratron.co.uk

C1 C2 D

Ref.No	Part No.	Description	Remark
R724	1-206-749-00	METAL OXIDE 10K 5% 3W	F
R725	1-202-824-00	SOLID 3.3K 1/2W	
R726	1-202-824-00	SOLID 3.3K 1/2W	
R727	1-202-824-00	SOLID 3.3K 1/2W	
R728	1-202-549-00	SOLID 100 10% 1/2W	
R729	1-202-837-00	SOLID 82K 1/2W	
R730	1-202-846-00	SOLID 470K 1/2W	
R731	1-202-814-51	SOLID 33K 1/2W	
R732	1-202-815-51	SOLID 47K 1/2W	
R733	1-202-846-00	SOLID 470K 1/2W	
R734	1-202-719-00	SOLID 1M 10% 1/2W	
R735	1-202-842-51	SOLID 220K 1/2W	
R736	1-247-795-00	CARBON 33 5% 1/6W	
R737	1-246-525-00	CARBON 150K 5% 1/4W	
R738	1-247-795-00	CARBON 33 5% 1/6W	
R739	1-202-844-00	SOLID 330K 1/2W	

VARIABLE RESISTOR

RV713	1-226-114-00	RES, ADJ, METAL GLAZE 2.2M
RV714	1-226-063-00	RES, ADJ, CARBON 2.2M

SPARK GAP

SG701	1-519-063-XX	DISCHARGING GAP
SG702	1-519-063-XX	DISCHARGING GAP
SG703	1-519-063-XX	DISCHARGING GAP
SG704	1-519-063-XX	DISCHARGING GAP
SG705	1-519-063-XX	DISCHARGING GAP

⚡:1-612-246-11 C2 BOARD  
\*\*\*\*\*

⚡:1-560-278-00 PLUG, CONNECTOR 8P

RESISTOR

R701	1-247-839-00	CARBON 2.2K 5% 1/6W
R702	1-247-823-00	CARBON 470 5% 1/6W
R703	1-247-839-00	CARBON 2.2K 5% 1/6W
R704	1-247-823-00	CARBON 470 5% 1/6W
R705	1-247-839-00	CARBON 2.2K 5% 1/6W
R706	1-247-823-00	CARBON 470 5% 1/6W

VARIABLE RESISTOR

RV701	1-226-819-00	RES, ADJ, CARBON 1K
RV702	1-226-819-00	RES, ADJ, CARBON 1K
RV703	1-226-921-00	RES, ADJ, CARBON 4.7K
RV704	1-226-921-00	RES, ADJ, CARBON 4.7K
RV705	1-226-819-00	RES, ADJ, CARBON 1K
RV706	1-226-819-00	RES, ADJ, CARBON 1K
RV707	1-226-921-00	RES, ADJ, CARBON 4.7K
RV708	1-226-921-00	RES, ADJ, CARBON 4.7K
RV709	1-226-819-00	RES, ADJ, CARBON 1K
RV710	1-226-819-00	RES, ADJ, CARBON 1K

Ref.No	Part No.	Description	Remark
RV711	1-226-921-00	RES, ADJ, CARBON 4.7K	
RV712	1-226-921-00	RES, ADJ, CARBON 4.7K	

SWITCH

S701	1-516-503-00	SLIDE SWITCH
------	--------------	--------------

\*\*\*\*\*

⚡:A-1345-455-A D BOARD, COMPLETE  
\*\*\*\*\*

3-703-137-00 SCREW, TAPPING  
4-363-414-00 SPACER, MICA  
⚡:4-367-226-00 HOLDER, H OUT

CAPACITOR

C501	1-123-381-00	ELECT 2.2MF 20% 50V
C502	1-123-369-00	ELECT 4.7MF 20% 50V
C503	1-108-555-00	MYLAR 0.001MF 5% 50V
C504	1-108-559-00	MYLAR 0.0015MF 5% 50V
C505	1-102-115-00	CERAMIC 560PF 10% 50V
C506	1-102-529-00	CERAMIC 100PF 5% 50V
C507	1-108-384-00	MYLAR 0.039MF 10% 100V
C508	1-123-380-00	ELECT 1MF 20% 50V
C509	1-108-377-00	MYLAR 0.01MF 10% 100V
C510	1-123-382-00	ELECT 3.3MF 20% 50V
C511	1-123-379-00	ELECT 0.47MF 20% 50V
C513	1-130-640-00	FILM 0.47MF 5% 50V
C514	1-131-369-00	TANTALUM 4.7MF 20% 16V
C515	1-123-356-00	ELECT 10MF 20% 25V
C516	1-106-204-00	MYLAR 0.022MF 10% 100V
C517	1-108-595-00	MYLAR 0.047MF 5% 50V
C518	1-123-321-00	ELECT 220MF 20% 16V
C519	1-102-989-00	CERAMIC 68PF 5% 500V
C520	1-106-204-00	MYLAR 0.022MF 10% 100V
C521	1-108-377-00	MYLAR 0.01MF 10% 100V
C523	1-106-204-00	MYLAR 0.022MF 10% 100V
C524	1-106-180-00	MYLAR 0.0022MF 5% 100V
C525	1-129-794-00	FILM 0.0033MF 5% 100V
C526	1-123-381-00	ELECT 2.2MF 20% 50V
C527	1-123-381-00	ELECT 2.2MF 20% 50V
C528	1-101-006-00	CERAMIC 0.047MF 50V
C531	1-123-381-00	ELECT 2.2MF 20% 50V
C533	1-123-335-00	ELECT 330MF 20% 25V
C534	1-123-379-00	ELECT 0.47MF 20% 50V
C535	1-108-429-00	MYLAR 0.047MF 10% 200V
C536	1-101-810-00	CERAMIC 100PF 5% 500V
C537	1-108-365-00	MYLAR 0.001MF 10% 100V
C538	1-161-961-00	CERAMIC 0.0022MF 10% 3KV
C539	1-108-387-00	MYLAR 0.068MF 10% 100V
C540	1-136-139-00	FILM 0.012MF 3% 2KV
C541	1-129-745-00	FILM 0.033MF 10% 400V
C542	1-102-223-00	CERAMIC 0.0047MF 10% 2KV
C543	1-123-254-00	ELECT 10MF 250V

Ref.No	Part No.	Description	Remark	Ref.No	Part No.	Description	Remark
C544	1-102-038-00	CERAMIC 0.001MF	500V	D510	8-719-928-08	DIODE ERD28-08	
C545	1-123-333-00	ELECT 100MF 20%	25V	D511	8-719-903-09	DIODE V30N	
C546	1-102-038-00	CERAMIC 0.001MF	500V	D512	8-719-901-93	DIODE V19E	
C547	1-136-110-00	FILM 0.91MF 5%	200V	D513	8-719-901-93	DIODE V19E	
C548	1-108-421-00	MYLAR 0.01MF 10%	200V	D514	8-719-911-55	DIODE U05G	
C549	1-136-113-00	FILM 2MF 5%	200V	D515	8-719-901-93	DIODE V19E	
C550	1-129-943-00	FILM 0.68MF 10%	400V	D516	8-719-911-19	DIODE 1SS119	
C551	1-123-332-00	ELECT 47MF 20%	16V	D517	8-719-911-55	DIODE U05G	
C552	1-123-332-00	ELECT 47MF 20%	16V	D518	8-719-911-55	DIODE U05G	
C553	1-108-377-00	MYLAR 0.01MF 10%	100V	D519	8-719-911-55	DIODE U05G	
C554	1-123-333-00	ELECT 100MF 20%	25V	D520	8-719-911-19	DIODE 1SS119	
C555	1-102-228-00	CERAMIC 470PF 10%	500V	D521	8-719-911-19	DIODE 1SS119	
C556	1-123-360-00	ELECT 100MF 20%	50V	D524	8-719-911-19	DIODE 1SS119	
C557	1-106-204-00	MYLAR 0.022MF 10%	100V	D525	8-719-102-82	DIODE 7.5E-N3	
C559	1-123-330-00	ELECT 22MF 20%	16V				
C560	1-108-383-00	MYLAR 0.033MF 10%	100V				
C562	1-123-332-00	ELECT 47MF 20%	16V				
C563	1-123-332-00	ELECT 47MF 20%	16V				
C566	1-108-555-00	MYLAR 0.001MF 5%	50V				
C567	1-101-006-00	CERAMIC 0.047MF	50V				
C568	1-123-321-00	ELECT 220MF 20%	16V				
C569	1-108-377-00	MYLAR 0.01MF 10%	100V				
C570	1-108-377-00	MYLAR 0.01MF 10%	100V				
C571	1-101-006-00	CERAMIC 0.047MF	50V				
C572	1-101-006-00	CERAMIC 0.047MF	50V				
C573	1-123-380-00	ELECT 1MF 20%	50V				
C575	1-123-024-00	ELECT 33MF	160V				
C801	1-123-369-00	ELECT 4.7MF 20%	50V				
C802	1-123-369-00	ELECT 4.7MF 20%	50V				
C803	1-108-591-00	MYLAR 0.033MF 5%	50V				
C804	1-124-192-00	ELECT 4.7MF 20%	50V				
C805	1-108-372-00	MYLAR 0.0039MF 10%	100V				
C806	1-123-380-00	ELECT 1MF 20%	50V				
C807	1-123-332-00	ELECT 47MF 20%	16V				
C808	1-123-228-00	ELECT 1MF 20%	50V				
C810	1-123-336-00	ELECT 470MF 20%	25V				
C813	1-108-435-00	MYLAR 0.15MF 10%	200V				
<u>CONNECTOR</u>							
D1	▲:1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P					
D2	▲:1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P					
D3	▲:1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P					
D4	▲:1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P					
D5	▲:1-508-767-00	5P PLUG					
D6	▲:1-564-038-00	CONNECTOR PLUG, DY (MINI) 6P					
D7	▲:1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)					
D8	▲:1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P					
<u>DIODE</u>							
D501	8-719-102-60	DIODE RD3.9E-N2					
D502	8-719-911-19	DIODE 1SS119					
D504	8-719-911-19	DIODE 1SS119					
D509	8-719-305-15	DIODE GH3F					
D510	8-719-928-08	DIODE ERD28-08					
D511	8-719-903-09	DIODE V30N					
D512	8-719-901-93	DIODE V19E					
D513	8-719-901-93	DIODE V19E					
D514	8-719-911-55	DIODE U05G					
D515	8-719-901-93	DIODE V19E					
D516	8-719-911-19	DIODE 1SS119					
D517	8-719-911-55	DIODE U05G					
D518	8-719-911-55	DIODE U05G					
D519	8-719-911-55	DIODE U05G					
D520	8-719-911-19	DIODE 1SS119					
D521	8-719-911-19	DIODE 1SS119					
D524	8-719-911-19	DIODE 1SS119					
D525	8-719-102-82	DIODE 7.5E-N3					
<u>IC</u>							
IC501	8-759-100-60	IC UPC1377C					
IC502	8-759-979-16	IC CX7916					
IC504	8-759-145-58	IC UPC4558C					
IC505	8-759-113-78	IC UPC1378H-L					
IC801	8-759-905-39	IC TDA1082					
<u>COIL</u>							
L501	1-408-242-00	MICRO INDUCTOR 10MMH					
L502	1-407-780-00	COIL, SPOOK CHOKE					
L503	1-407-365-00	COIL, CHOKE					
L504	1-459-390-00	COIL (WITH CORE)					
L505	1-421-368-00	COIL, VAR FERRITE (HLC)					
L506	1-408-239-00	MICRO INDUCTOR 4.7MMH					
L507	1-459-104-00	COIL, DUST CORE					
L508	1-408-242-00	MICRO INDUCTOR 10MMH					
L509	1-421-329-00	COIL, CHOKE					
L801	1-459-075-00	COIL, DYNAMIC CONVERSION CHOKE					
L802	1-459-338-00	COIL, VAR, FERRITE (PAC)					
<u>TRANSISTOR</u>							
Q501	8-729-384-48	TRANSISTOR 2SA844					
Q502	8-729-245-83	TRANSISTOR 2SC2458					
Q503	8-729-900-36	TRANSISTOR DTC124ES					
Q504	8-729-900-36	TRANSISTOR DTC124ES					
Q505	8-729-900-36	TRANSISTOR DTC124ES					
Q506	8-729-900-36	TRANSISTOR DTC124ES					
Q507	8-729-900-63	TRANSISTOR DTA124ES					
Q508	8-729-168-82	TRANSISTOR 2SC2688					
Q509	8-729-800-87	TRANSISTOR 2SD1398-CA					
Q510	8-729-245-83	TRANSISTOR 2SC2458					
Q512	8-729-177-43	TRANSISTOR 2SD774					
Q801	8-729-313-42	TRANSISTOR 2SD1134					
Q802	8-729-245-83	TRANSISTOR 2SC2458					
Q805	8-729-245-83	TRANSISTOR 2SC2458					
Q850	8-729-384-48	TRANSISTOR 2SA844					
<u>RESISTOR</u>							
R501	1-247-835-00	CARBON 1.5K 5% 1/6W					

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauritron.co.uk

D

Ref.No	Part No.	Description	Remark			Ref.No	Part No.	Description	Remark		
R502	1-247-823-00	CARBON	470	5%	1/6W	R565	1-212-371-00	METAL OXIDE	8.2	5%	1W F
R503	1-247-823-00	CARBON	470	5%	1/6W	R566	1-247-889-00	CARBON	270K	5%	1/6W
R504	1-247-831-00	CARBON	1K	5%	1/6W	R567	1-247-903-00	CARBON	1M	5%	1/6W
R505	1-247-855-00	CARBON	10K	5%	1/6W	R568	1-213-137-00	METAL OXIDE	330	5%	1W F
R506	1-247-839-00	CARBON	2.2K	5%	1/6W	R569	1-213-137-00	METAL OXIDE	330	5%	1W F
R507	1-247-833-00	CARBON	1.2K	5%	1/6W	R570	1-247-230-00	CARBON	390	5%	1/2W
R508	1-247-835-00	CARBON	1.5K	5%	1/6W	R571	1-247-863-00	CARBON	22K	5%	1/6W
R509	1-247-839-00	CARBON	2.2K	5%	1/6W	R572	1-247-865-00	CARBON	27K	5%	1/6W
R510	1-247-865-00	CARBON	27K	5%	1/6W	R573	1-247-843-00	CARBON	3.3K	5%	1/6W
R511	1-215-459-00	METAL	39K	1%	1/6W	R574	1-247-871-00	CARBON	47K	5%	1/6W
R512	1-247-877-00	CARBON	82K	5%	1/6W	R575	1-247-879-00	CARBON	100K	5%	1/6W
R513	1-247-855-00	CARBON	10K	5%	1/6W	R577	1-247-855-00	CARBON	10K	5%	1/6W
R514	1-215-475-00	METAL	180K	1%	1/6W	R578	1-215-459-00	METAL	39K	1%	1/6W
R515	1-215-463-00	METAL	56K	1%	1/6W	R579	1-215-475-00	METAL	180K	1%	1/6W
R518	1-215-478-00	METAL	240K	1%	1/6W	R580	1-246-483-00	CARBON	2.7K	5%	1/4W
R519	1-215-463-00	METAL	56K	1%	1/6W	R581	1-246-483-00	CARBON	2.7K	5%	1/4W
R520	1-247-819-00	CARBON	330	5%	1/6W	R582	1-247-833-00	CARBON	1.2K	5%	1/6W
R521	1-247-827-00	CARBON	680	5%	1/6W	R583	1-247-831-00	CARBON	1K	5%	1/6W
R522	1-247-827-00	CARBON	680	5%	1/6W	R584	1-247-875-00	CARBON	68K	5%	1/6W
R523	1-247-823-00	CARBON	470	5%	1/6W	R585	1-247-873-00	CARBON	56K	5%	1/6W
R524	1-247-849-00	CARBON	5.6K	5%	1/6W	R586	1-215-493-00	METAL	1M	1%	1/6W
R525	1-247-835-00	CARBON	1.5K	5%	1/6W	R587	1-247-855-00	CARBON	10K	5%	1/6W
R526	1-247-851-00	CARBON	6.8K	5%	1/6W	R588	1-247-877-00	CARBON	82K	5%	1/6W
R527	1-247-857-00	CARBON	12K	5%	1/6W	R589	1-247-877-00	CARBON	82K	5%	1/6W
R528	1-247-847-00	CARBON	4.7K	5%	1/6W	R596	1-212-373-00	METAL OXIDE	12	5%	1W F
R529	1-215-471-00	METAL	120K	1%	1/6W	R597	1-215-373-31	METAL	10	1%	1/6W
R530	1-215-465-00	METAL	68K	1%	1/6W	R598	1-247-855-00	CARBON	10K	5%	1/6W
R531	1-247-835-00	CARBON	1.5K	5%	1/6W	R599	1-247-865-00	CARBON	27K	5%	1/6W
R532	1-246-992-00	CARBON	180	5%	1/8W F	R801	1-247-857-00	CARBON	12K	5%	1/6W
R533	1-247-851-00	CARBON	6.8K	5%	1/8W	R802	1-247-863-00	CARBON	22K	5%	1/6W
R534	1-247-835-00	CARBON	1.5K	5%	1/6W	R803	1-211-431-00	CARBON	150	5%	1/8W F
R535	1-215-456-00	METAL	30K	1%	1/6W	R805	1-247-815-00	CARBON	220	5%	1/6W
R536	1-247-857-00	CARBON	12K	5%	1/6W	R806	1-247-875-00	CARBON	68K	5%	1/6W
R537	1-247-879-00	CARBON	100K	5%	1/6W	R807	1-247-861-00	CARBON	18K	5%	1/6W
R538	1-247-847-00	CARBON	4.7K	5%	1/6W	R809	1-247-867-00	CARBON	33K	5%	1/6W
R540	1-247-859-00	CARBON	15K	5%	1/6W	R810	1-247-845-00	CARBON	3.9K	5%	1/6W
R548	1-247-813-00	CARBON	180	5%	1/6W	R811	1-247-867-00	CARBON	33K	5%	1/6W
R549	1-246-991-00	CARBON	150	5%	1/8W F	R812	1-247-863-00	CARBON	22K	5%	1/6W
R550	1-247-855-00	CARBON	10K	5%	1/6W	R813	1-247-845-00	CARBON	3.9K	5%	1/6W
R551	1-247-809-00	CARBON	120	5%	1/6W	R814	1-247-869-00	CARBON	39K	5%	1/6W
R552	1-247-855-00	CARBON	10K	5%	1/6W	R815	1-247-865-00	CARBON	27K	5%	1/6W
R553	1-205-642-00	CEMENTED	3.3K	10%	5W	R816	1-247-831-00	CARBON	1K	5%	1/6W
R554	1-247-837-00	CARBON	1.8K	5%	1/8W F	R817	1-247-831-00	CARBON	1K	5%	1/6W
R555	1-247-831-00	CARBON	1K	5%	1/6W	R818	1-247-891-00	CARBON	330K	5%	1/6W
R556	1-247-636-00	CARBON	0.47	5%	1/8W F	R825	1-212-363-00	METAL OXIDE	1.8	5%	1W F
R557	1-247-636-00	CARBON	0.47	5%	1/8W F	R827	1-247-859-00	CARBON	15K	5%	1/6W
R558	1-217-407-00	FUSIBLE	470		1/4W F	R840	1-247-855-00	CARBON	10K	5%	1/6W
R559	1-210-859-00	CARBON	1.2	5%	1/8W F	R841	1-244-883-00	CARBON	2.7K	5%	1/2W
R560	1-202-597-00	SOLID	10K	10%	1/2W	R845	1-247-885-00	CARBON	180K	5%	1/6W
R561	1-247-172-00	CARBON	51K	5%	1/4W	VARIABLE RESISTOR					
R562	1-247-172-00	CARBON	51K	5%	1/4W	RV501	1-228-577-00	RES, ADJ, CARBON	220		
R563	1-213-141-00	METAL OXIDE	680	5%	1W F	RV502	1-226-850-00	RES, ADJ, CARBON	4.7K		
R564	1-213-129-00	METAL OXIDE	68	5%	1W F						



Ref.No	Part No.	Description	Remark
RV503	1-226-851-00	RES, ADJ, CARBON 10K	
RV504	1-228-160-11	RES, ADJ, METAL GLAZE 5K	
RV505	1-222-344-00	RES, ADJ, CARBON 5K	
RV506	1-223-102-00	RES, ADJ, WIREWOUND 120	
RV507	1-226-854-00	RES, ADJ, CARBON 100K	
RV509	1-224-249-XX	RES, ADJ, METAL GLAZE 1K	
RV801	1-226-851-00	RES, ADJ, CARBON 10K	
RV802	1-226-847-00	RES, ADJ, CARBON 1K	
RV803	1-226-847-00	RES, ADJ, CARBON 1K	

SPARK GAP

SG501 1-519-063-XX DISCHARGING GAP

TRANSFORMER

T501	1-437-078-00	TRANSFORMER, HORIZONTAL DRIVE
T503	1-421-520-00	TRANSFORMER, FERRITE (PHT)
T801	1-421-245-11	TRANSFORMER, PZN CUSHION

\*\*\*\*\*

## 1-413-179-11 SWITCHING REGULATOR (TK-09)

\*\*\*\*\*

- ▲:1-611-903-11 TK-09GB BOARD
- 2-430-308-01 INSULATOR (TK-03), TR
- ▲:2-430-742-00 BRACKET-RIGHT (SR-12), L
- ▲:2-430-743-00 BRACKET-LEFT (SR-12)
- 2-430-773-01 +PSW 3X6
- ▲:2-430-947-00 PLATE, GROUND
- 2-434-060-01 +PSW 3X18
- 3-671-893-00 CLAMP (LOW TYPE)
- ▲:4-310-385-00 HOLDER, WIRE
- ▲:4-323-833-00 HEAT SINK, PIN OUT

CAPACITOR

C601	▲.1-130-806-21	FILM	0.10MF	10%	400V
C602	▲.1-161-742-12	CERAMIC	2200PF	20%	400V F
C603	▲.1-161-742-12	CERAMIC	2200PF	20%	400V F
C604	▲.1-161-742-12	CERAMIC	2200PF	20%	400V F
C605	▲.1-125-268-11	ELECT			
C606	▲.1-124-023-51	ELECT	4.7MF		350V
C607	▲.1-124-023-41	ELECT	4.7MF		350V
C610	▲.1-161-963-11	CERAMIC	100PF	20%	2V
C611	▲.1-161-912-11	CERAMIC	560PF	10%	500V
C612	▲.1-161-912-11	CERAMIC	560PF	10%	500V
C613	▲.1-161-912-11	CERAMIC	560PF	10%	500V
C614	▲.1-161-912-11	CERAMIC	560PF	10%	500V
C615	▲.1-161-989-11	CERAMIC	2200PF	10%	500V
C616	▲.1-130-516-51	FILM	0.01MF	10%	50V
C617	▲.1-130-520-51	FILM	0.022MF	10%	50V
C618	▲.1-123-357-51	ELECT	22MF	20%	50V
C619	▲.1-130-528-51	FILM	0.1MF	10%	50V
C620	▲.1-123-575-51	ELECT	100MF		160V
C621	▲.1-123-349-51	ELECT	1000MF	20%	35V
C622	▲.1-123-324-51	ELECT	1000MF	20%	16V

Ref.No	Part No.	Description	Remark
C623	▲.1-123-575-51	ELECT	100MF 160V
C624	▲.1-123-333-51	ELECT	100MF 20% 25V
C625	▲.1-123-333-51	ELECT	100MF 20% 25V
C651	▲.1-130-528-51	FILM	0.1MF 10% 50V
C652	▲.1-130-528-51	FILM	0.1MF 10% 50V
C653	▲.1-124-265-11	ELECT	33MF 50V
C654	▲.1-130-027-51	FILM	0.0056MF 5% 50V
C655	▲.1-130-512-51	FILM	0.0047MF 10% 50V
C656	▲.1-130-528-51	FILM	0.1MF 10% 50V
C657	▲.1-123-330-51	ELECT	22MF 20% 25V

CONNECTOR

CN651 ▲.1-564-164-11 PIN, CONNECTOR 7P

DIODE

D601	▲.8-719-300-53	DIODE	CTU-38S
D602	▲.8-719-300-52	DIODE	CTU-38R
D603	▲.8-719-903-02	DIODE	ESAC33-02C
D604	▲.8-719-903-02	DIODE	ESAC33-02C
D605	▲.8-719-900-93	DIODE	V09E
D606	▲.8-719-911-19	DIODE	1SS119
D607	▲.8-719-100-61	DIODE	RD11E-B2
D608	▲.8-719-100-34	DIODE	RD5.6E-B1
D609	▲.8-719-100-29	DIODE	RD5.1E-B1
D610	▲.8-719-100-29	DIODE	RD5.1E-B1
D611	▲.8-719-200-02	DIODE	10E2
D612	▲.8-719-100-34	DIODE	RD5.6E-B1
D613	▲.8-719-100-34	DIODE	RD5.6E-B1
D651	▲.8-719-911-19	DIODE	1SS119
D652	▲.8-719-911-19	DIODE	1SS119
D653	▲.8-719-911-19	DIODE	1SS119
D654	▲.8-719-100-34	DIODE	RD5.6E-B1

IC

IC651 ▲.8-759-906-22 IC MB3759PF

COIL

L601	▲.1-421-606-11	TRANSFORMER, LINE FILTER
L602	▲.1-410-052-11	COIL, CHOKE (MAIN)
L603	▲.1-410-053-11	COIL, CHOKE
L604	▲.1-408-933-11	COIL, CHOKE
L605	▲.1-408-933-11	COIL, CHOKE
L606	▲.1-408-933-11	COIL, CHOKE

TRANSISTOR

Q601	▲.8-729-300-95	TRANSISTOR	STR8124
Q602	▲.8-729-102-03	TRANSISTOR	2SD1020
Q603	▲.8-729-102-03	TRANSISTOR	2SD1020
Q604	▲.8-729-178-54	TRANSISTOR	2SC2785
Q605	▲.8-729-177-43	TRANSISTOR	2SD774
Q651	▲.8-729-117-54	TRANSISTOR	2SA1175
Q652	▲.8-729-178-54	TRANSISTOR	2SC2785

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauritron.co.uk

The components identified by shading and mark ▲ are critical for safety. Replace only with part number specified.

TK-09

Ref.No	Part No.	Description	Remark
<u>RESISTOR</u>			
R601	△.1-244-921-11	CARBON 100K 5% 1/2W	
R602	△.1-246-497-25	CARBON 10K 5% 1/4W	
R603	△.1-212-946-51	FUSE 3.3 5% 1/2W	
R604	△.1-246-449-25	CARBON 100 5% 1/4W	
R605	△.1-244-921-11	CARBON 100K 5% 1/2W	
R606	△.1-246-497-25	CARBON 10K 5% 1/4W	
R607	△.1-212-946-51	FUSE 3.3 5% 1/2W	
R608	△.1-246-449-25	CARBON 100 5% 1/4W	
R609	△.1-244-873-11	CARBON 1K 5% 1/2W	
R610	△.1-246-461-25	CARBON 330 5% 1/4W	
R611	△.1-246-521-25	CARBON 100K 5% 1/4W	
R612	△.1-246-497-25	CARBON 10K 5% 1/4W	
R613	△.1-246-482-25	CARBON 2.4K 5% 1/4W	
R615	△.1-213-151-61	METAL 4.7K 5% 1W	
R616	△.1-246-453-25	CARBON 150 5% 1/4W	
R617	△.1-246-417-25	CARBON 4.7 5% 1/4W	
R618	△.1-217-465-21	FUSE 0.47 10% 1W	
R619	△.1-217-465-21	FUSE 0.47 10% 1W	
R620	△.1-246-418-25	CARBON 5.1 5% 1/4W	
R651	△.1-247-855-41	CARBON 10K 5% 1/6W	
R652	△.1-247-845-41	CARBON 3.9K 5% 1/6W	
R653	△.1-247-862-41	CARBON 20K 5% 1/6W	
R654	△.1-247-864-41	CARBON 24K 5% 1/6W	
R655	△.1-247-836-41	CARBON 1.6K 5% 1/6W	
R656	△.1-247-879-41	CARBON 100K 5% 1/6W	
R657	△.1-247-835-41	CARBON 1.5K 5% 1/6W	
R658	△.1-247-881-41	CARBON 120K 5% 1/6W	
R659	△.1-247-854-41	CARBON 9.1K 5% 1/6W	
R660	△.1-214-777-51	METAL 100K 1% 1/4W	
R661	△.1-214-744-51	METAL 4.3K 1% 1/4W	
R662	△.1-247-861-41	CARBON 18K 5% 1/6W	
R663	△.1-247-852-41	CARBON 7.5K 5% 1/6W	
R664	△.1-247-846-41	CARBON 4.3K 5% 1/6W	
R665	△.1-247-849-41	CARBON 5.6K 5% 1/6W	
R666	△.1-247-831-41	CARBON 1.0K 5% 1/6W	
R667	△.1-247-837-41	CARBON 1.8K 5% 1/6W	

TRANSFORMER

T601	△.1-447-764-11	TRANSFORMER, CONVERTER
T602	△.1-437-102-12	TRANSFORMER, DRIVE
T603	△.1-421-460-11	TRANSFORMER, CURRENT

MISCELLANEOUS

\*\*\*\*\*

△.1-228-482-00	RESISTOR ASSY, HIGH-VOLTAGE
△.1-451-204-61	DEFLECTION YOKE (SY-108B)

Ref.No	Part No.	Description	Remark
	1-452-032-00	MAGNET DISK; 10MM ϕ	
	1-452-094-00	MAGNET ROTATABLE DISK; 15MM ϕ	
	△.1-534-820-XX	POWER CORD	
L901	△.1-426-087-41	COIL, DEGAUSSING	
S901	△.1-552-503-00	SWITCH, PUSH	
SP901	1-503-109-00	SPEAKER	
T502	△.1-439-322-00	TRANSFORMER ASSY, FLYBACK	
V901	△.8-737-251-05	CRT A49JHT00X	

\*\*\*\*\*

ACCESSORIES AND PACKING MATERIALS


\*\*\*\*\*

Part No.	Description	Remark
4-493-915-11	MANUAL, INSTRUCTION	
4-309-537-00	BAG, PROTECTION	
4-363-322-01	INDIVIDUAL CARTON	
4-370-943-01	CUSHION (UPPER) (ASSY)	
4-370-944-01	CUSHION (LOWER) (ASSY)	


The components identified by shading and mark △ are critical for safety. Replace only with part number specified.













# HARDWARE NOMENCLATURE




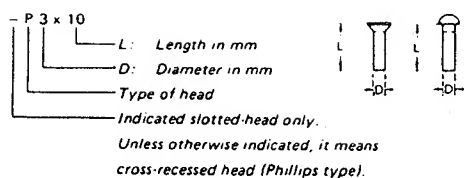









Screw:



Nut, Washer, Retaining ring:



Reference Designation	Shape	Description	Remarks
<b>SCREWS</b>			
P		pan-head screw	binding-head (B) screw for replacement
PWH		pan-head screw with washer face	binding-head (B) screw and flat washer for replacement
PS PSP		pan-head screw with spring washer	binding-head (B) screw and spring washer for replacement
PSW PSPW		pan-head screw with spring and flat washers	binding-head (B) screw and spring and flat washers for replacement
R		round-head screw	binding-head (B) screw for replacement
K		flat-countersunk-head screw	
RK		oval-countersunk-head screw	
B		binding-head screw	
T		truss-head screw	binding-head (B) screw for replacement
F		flat-fillister-head screw	
RF		fillister-head screw	
BV		brazier-head screw	

Reference Designation	Shape	Description	Remarks
<b>SELF-TAPPING SCREWS</b>			
TA		self-tapping screw	ex: TA, P 3 x 10
PTP		pan-head self-tapping screw	binding-head self-tapping (TA, B) screw for replacement
PTPWH		pan-head self-tapping screw with washer face	binding-head self-tapping (TA, B) screw and flat washer for replacement
PTTWH		pan-head thread-rolling screw with washer face	binding-head (B) screw and flat washer for replacement
<b>SET SCREWS</b>			
SC		set screw	
SC		hexagon-socket set screw	ex SC 2.6 x 4, hexagon socket
<b>NUT</b>			
N		nut	
<b>WASHERS</b>			
W		flat washer	
SW		spring washer	
LW		internal-tooth lock washer	ex LW3, internal
LW		external-tooth lock washer	ex LW3, external
<b>RETAINING RINGS</b>			
E		retaining ring	
G		grip-type retaining ring	

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel:- 01844-351694 Fax:- 01844-352554  
 Email:- enquiries@mauritron.co.uk



# PVM-2010QM

## SONY® SERVICE MANUAL

*AEP Model*  
*UK Model*

*Chassis No. SCC-557A-A*

No. 1

## SUPPLEMENT

**SUBJECT:** The following part numbers in the printed wiring boards have been changed.

File this supplement with the service manual.

Board	Part No.
F	1-612-243-16
H	1-612-248-12
B	1-612-247-16
D	1-612-242-15
Q	1-612-244-13
C1	1-612-245-14
C2	1-612-246-12

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel:- 01844-351694 Fax:- 01844-352554  
Email:- enquiries@mauritron.co.uk

### TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
5.	DIAGRAMS	
5-1.	Circuit Boards Location .....	3
5-2.	Block Diagram .....	3
5-3.	Semiconductors .....	6
5-4.	Schematic Diagrams .....	7
5-5.	Printed Wiring Boards .....	15
6.	EXPLODED VIEWS	
(1)	Cabinet Ass'y .....	28
(2)	Chassis Ass'y .....	29
(3)	Bezel Ass'y .....	30
7.	ELECTRICAL PARTS LIST .....	31







See.

## SECTION 5 DIAGRAMS

5-1. CIRCUIT BOARDS LOCATION

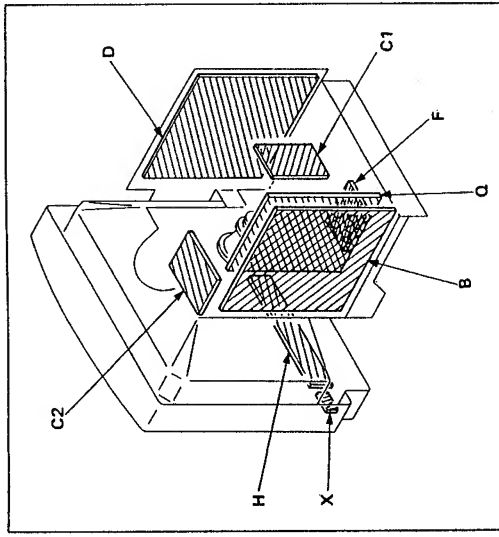


5-2. BLOCK DIAGRAM

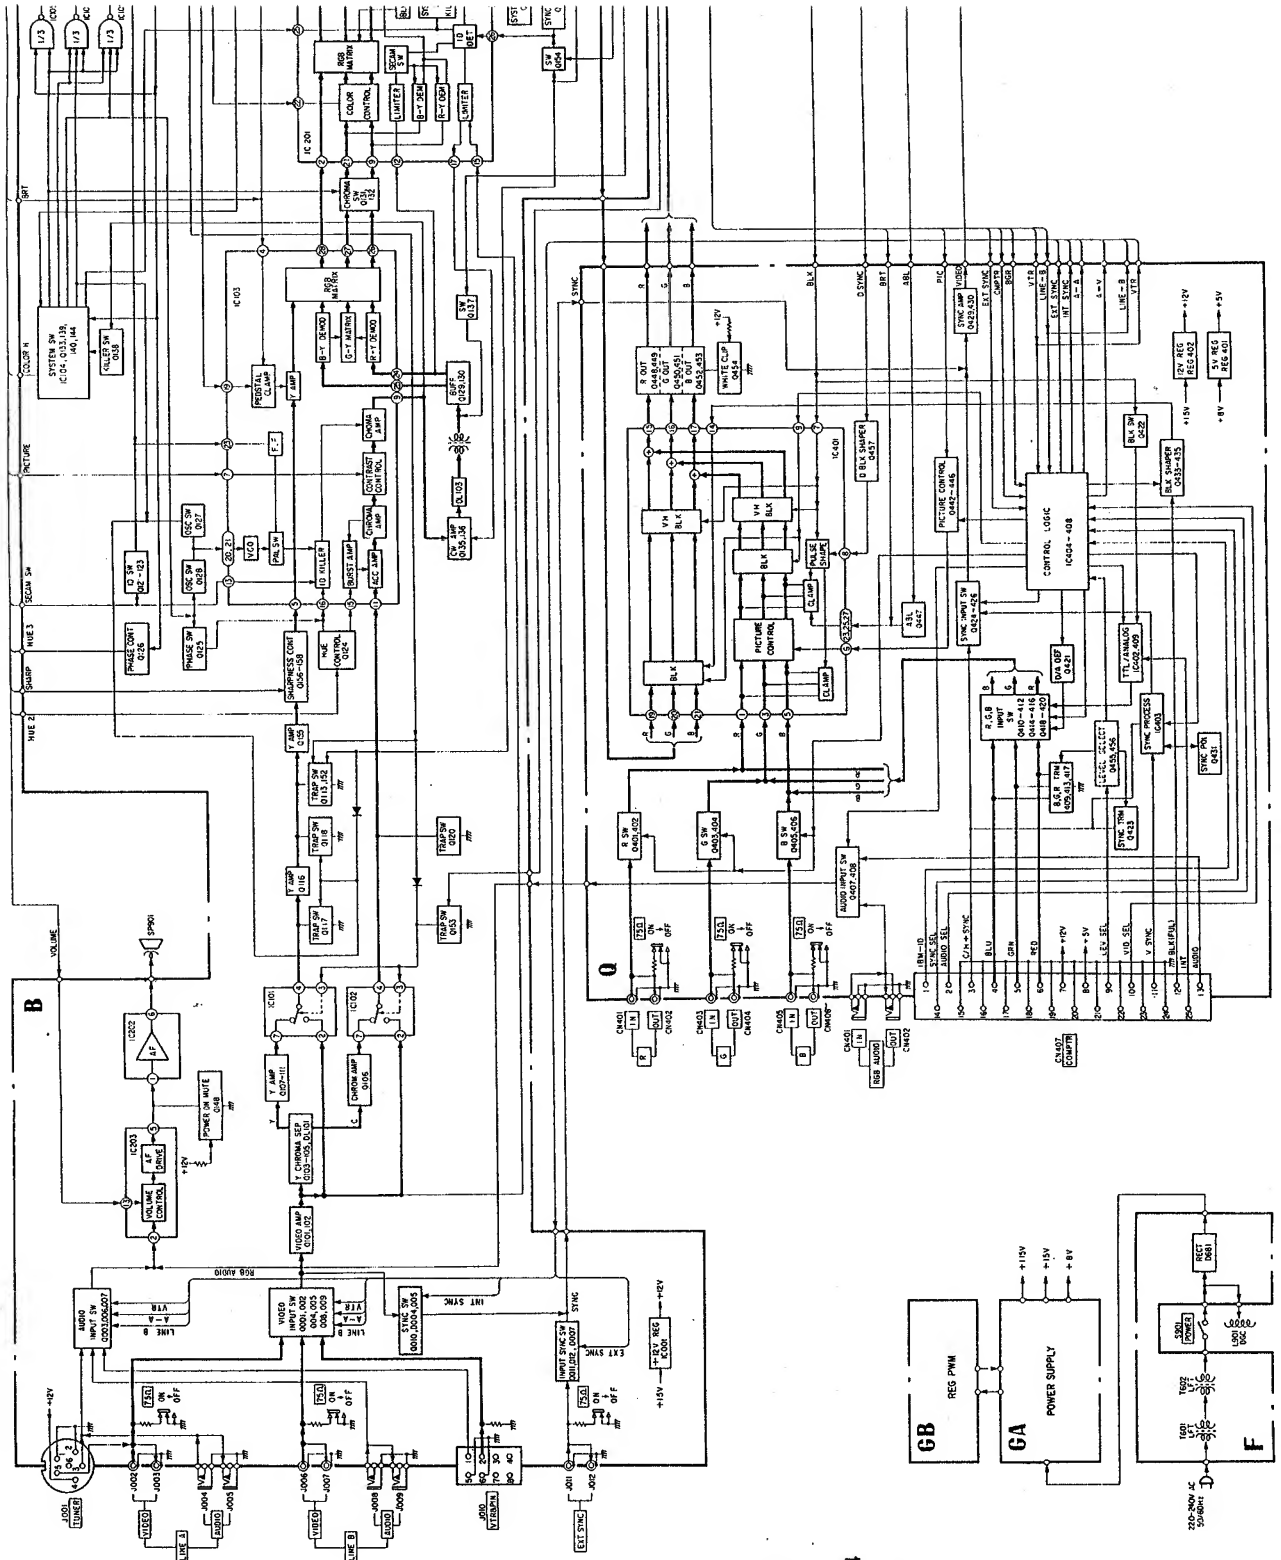

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel: 01844-351694 Fax: 01844-352554  
 Email: enquiries@maurifron.co.uk



### 5-3. SEMICONDUCTORS

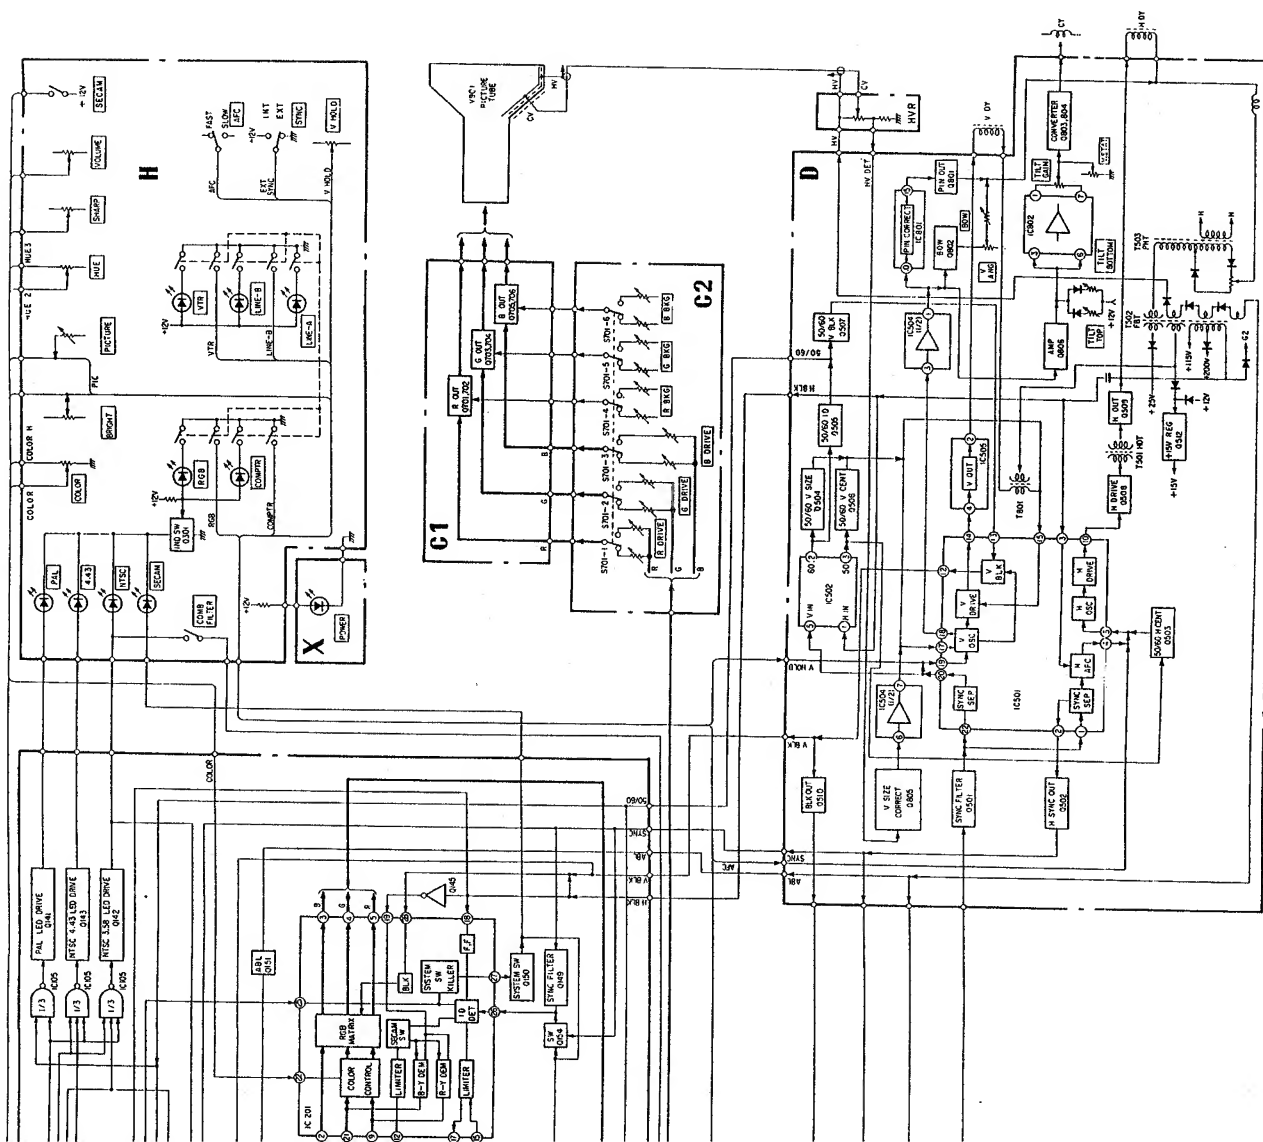

<p>μPC1241H</p> <p>1 2 3 4 (Facing side view)</p>	<p>CX095E SN74LS00N SN74LS04N SN74LS08N SN74LS09N SN74LS136N SN74LS20N TC4023BP TC4024BP</p> <p>14 13 12 11 10 9 8 7 6 5 4 3 2 1 (Top view)</p>	<p>2SK105A-30 2SK107-3</p> <p>5 4 3 2 1</p>	<p>2SA1175 2SC2785</p> <p>4 3 2 1</p>	<p>GH3F U05G</p> <p>2 1 cathode anode</p>	<p>ERA81-004 GP08D</p> <p>2 1 cathode anode</p>	<p>1SS119 1SS133 1SS148</p> <p>2 1 cathode anode</p>	<p>25A733 25A844 25C1363 25C1815 25C945</p> <p>3 2 1</p>	<p>3T-22A D033 EQB01-22 RH1A RH1Z S1801-02</p> <p>2 1 cathode anode</p>	<p>SG232D</p> <p>2 1 cathode anode</p>	<p>SY432D</p> <p>2 1 cathode anode</p>	<p>V19C V19E V30N</p> <p>2 1 cathode anode</p>	<p>ERD2B-08S RD3.0E-B1 RD3.9E-N1 RD4.3E-B1 RD4.7E-B2 RD6.2E-B1 RD6.2E-B2 RD7.5EN3 RD8.2E-N1 RD8.2E-N2</p> <p>2 1 cathode anode</p>	<p>2SD1134</p> <p>3 2 1</p>	<p>2SC2611 2SC2688</p> <p>3 2 1</p>	<p>2SD1398</p> <p>3 2 1</p>	<p>2SA1048 2SA1115 2SC2458 2SC2603 DTA124ES</p> <p>3 2 1</p>	<p>2SD774</p> <p>3 2 1</p>	<p>2SC2611 2SC2688</p> <p>3 2 1</p>	<p>2SD1398</p> <p>3 2 1</p>	<p>2SA1048 2SA1115 2SC2458 2SC2603 DTA124ES</p> <p>3 2 1</p>	<p>2SD774</p> <p>3 2 1</p>	<p>2SC2611 2SC2688</p> <p>3 2 1</p>	<p>2SD1398</p> <p>3 2 1</p>	<p>2SA1048 2SA1115 2SC2458 2SC2603 DTA124ES</p> <p>3 2 1</p>	<p>2SD774</p> <p>3 2 1</p>	<p>2SC2611 2SC2688</p> <p>3 2 1</p>	<p>2SD1398</p> <p>3 2 1</p>	<p>2SA1048 2SA1115 2SC2458 2SC2603 DTA124ES</p> <p>3 2 1</p>	<p>2SD774</p> <p>3 2 1</p>	<p>2SC2611 2SC2688</p> <p>3 2 1</p>	<p>2SD1398</p> <p>3 2 1</p>	<p>2SA1048 2SA1115 2SC2458 2SC2603 DTA124ES</p> <p>3 2 1</p>	<p>2SD774</p> <p>3 2 1</p>	<p>2SC2611 2SC2688</p> <p>3 2 1</p>	<p>2SD1398</p> <p>3 2 1</p>	<p>2SA1048 2SA1115 2SC2458 2SC2603 DTA124ES</p> <p>3 2 1</p>	<p>2SD774</p> <p>3 2 1</p>	<p>2SC2611 2SC2688</p> <p>3 2 1</p>	<p>2SD1398</p> <p>3 2 1</p>	<p>2SA1048 2SA1115 2SC2458 2SC2603 DTA124ES</p> <p>3 2 1</p>	<p>2SD774</p> <p>3 2 1</p>	<p>2SC2611 2SC2688</p> <p>3 2 1</p>	<p>2SD1398</p> <p>3 2 1</p>	<p>2SA1048 2SA1115 2SC2458 2SC2603 DTA124ES</p> <p>3 2 1</p>	<p>2SD774</p> <p>3 2 1</p>	<p>2SC2611 2SC2688</p> <p>3 2 1</p>	<p>2SD1398</p> <p>3 2 1</p>	<p>2SA1048 2SA1115 2SC2458 2SC2603 DTA124ES</p> <p>3 2 1</p>	<p>2SD774</p>
---	---	---	---	---	---	--	--	---	--	--	--	--	-----------------------------	---	-----------------------------	--	----------------------------	---	-----------------------------	--	----------------------------	---	-----------------------------	--	----------------------------	---	-----------------------------	--	----------------------------	---	-----------------------------	--	----------------------------	---	-----------------------------	--	----------------------------	---	-----------------------------	--	----------------------------	---	-----------------------------	--	----------------------------	---	-----------------------------	--	---------------

## 5-4. SCHEMATIC DIAGRAMS

Note: The components identified by shading and mark  $\Delta$  are critical for safety. Replace only with part number specified.

- All capacitors are in  $\mu\text{F}$  unless otherwise noted. pF:  $\mu\text{F}$ F
- 50WV or less are not indicated except for electrolytics.
- All resistors are in ohms, 1/5W unless otherwise noted.
- k $\Omega$  = 1000 $\Omega$ , M $\Omega$  = 1000k $\Omega$
- Notice that the following boards have not a resistance wattage of 1/5W.
- GA Board ..... 1/4W (as a reference)
- $\square$  : nonflammable resistor.
- $\square$  : fusible resistor
- $\Delta$  : internal component.
- $\square$  : part designation.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Readings are taken with a color-bar signal input to LINE A.
- Voltages are dc with respect to ground unless otherwise noted.
- The voltage of Q601 - Q603 is a reference value between emitter of Q601.
- Readings are taken with a 10M $\Omega$  digital multimeter.
- $\square$  : adjustment for repair.
- Voltage variations may be noted due to normal production tolerances.
- : B + bus.
- ① : The number indicates No. of a waveform diagram.
- For the waveform diagram, refer to page 23 ~ 27.

no mark : PAL  
( ) : SECAM  
< > : NTSC 3.58  
[ ] : NTSC 4.43


\* : Not measurable.


\* : Selected to yield optimum performance.

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY


Tel: 01844-351694 Fax: 01844-352554


Email: enquiries@mauritron.co.uk

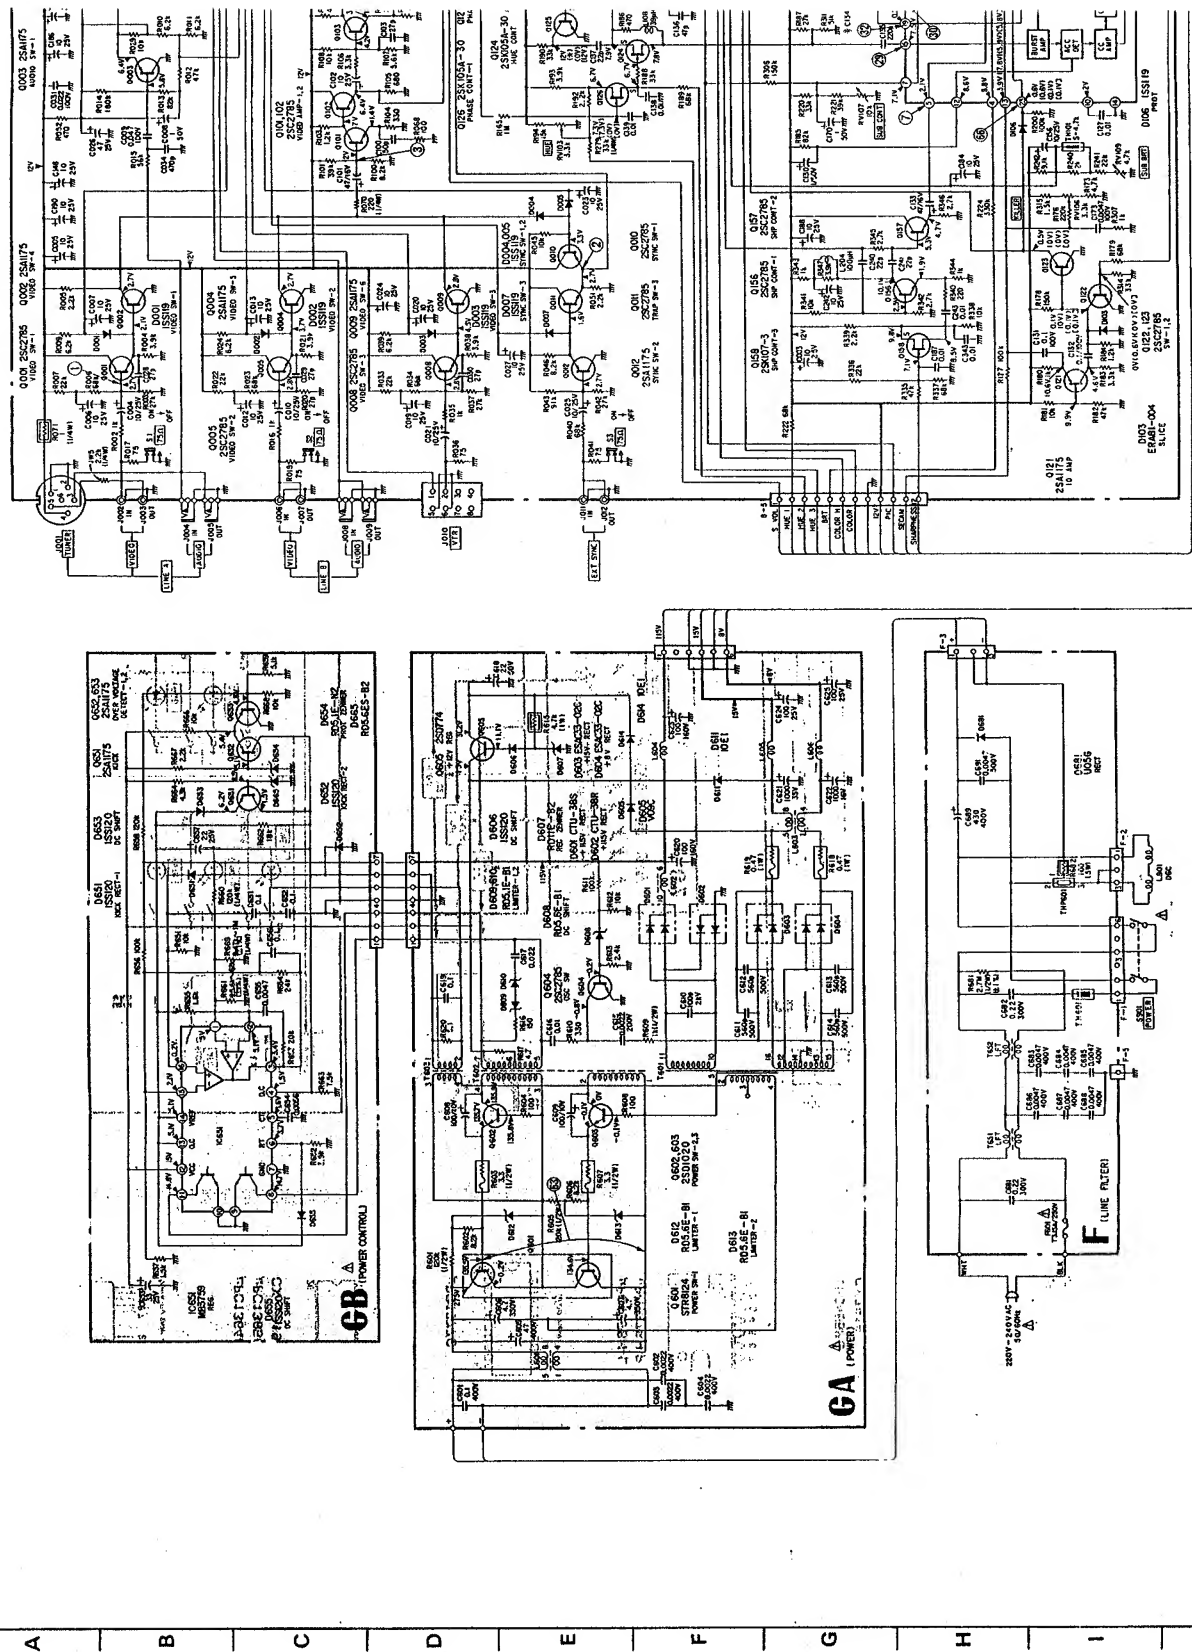

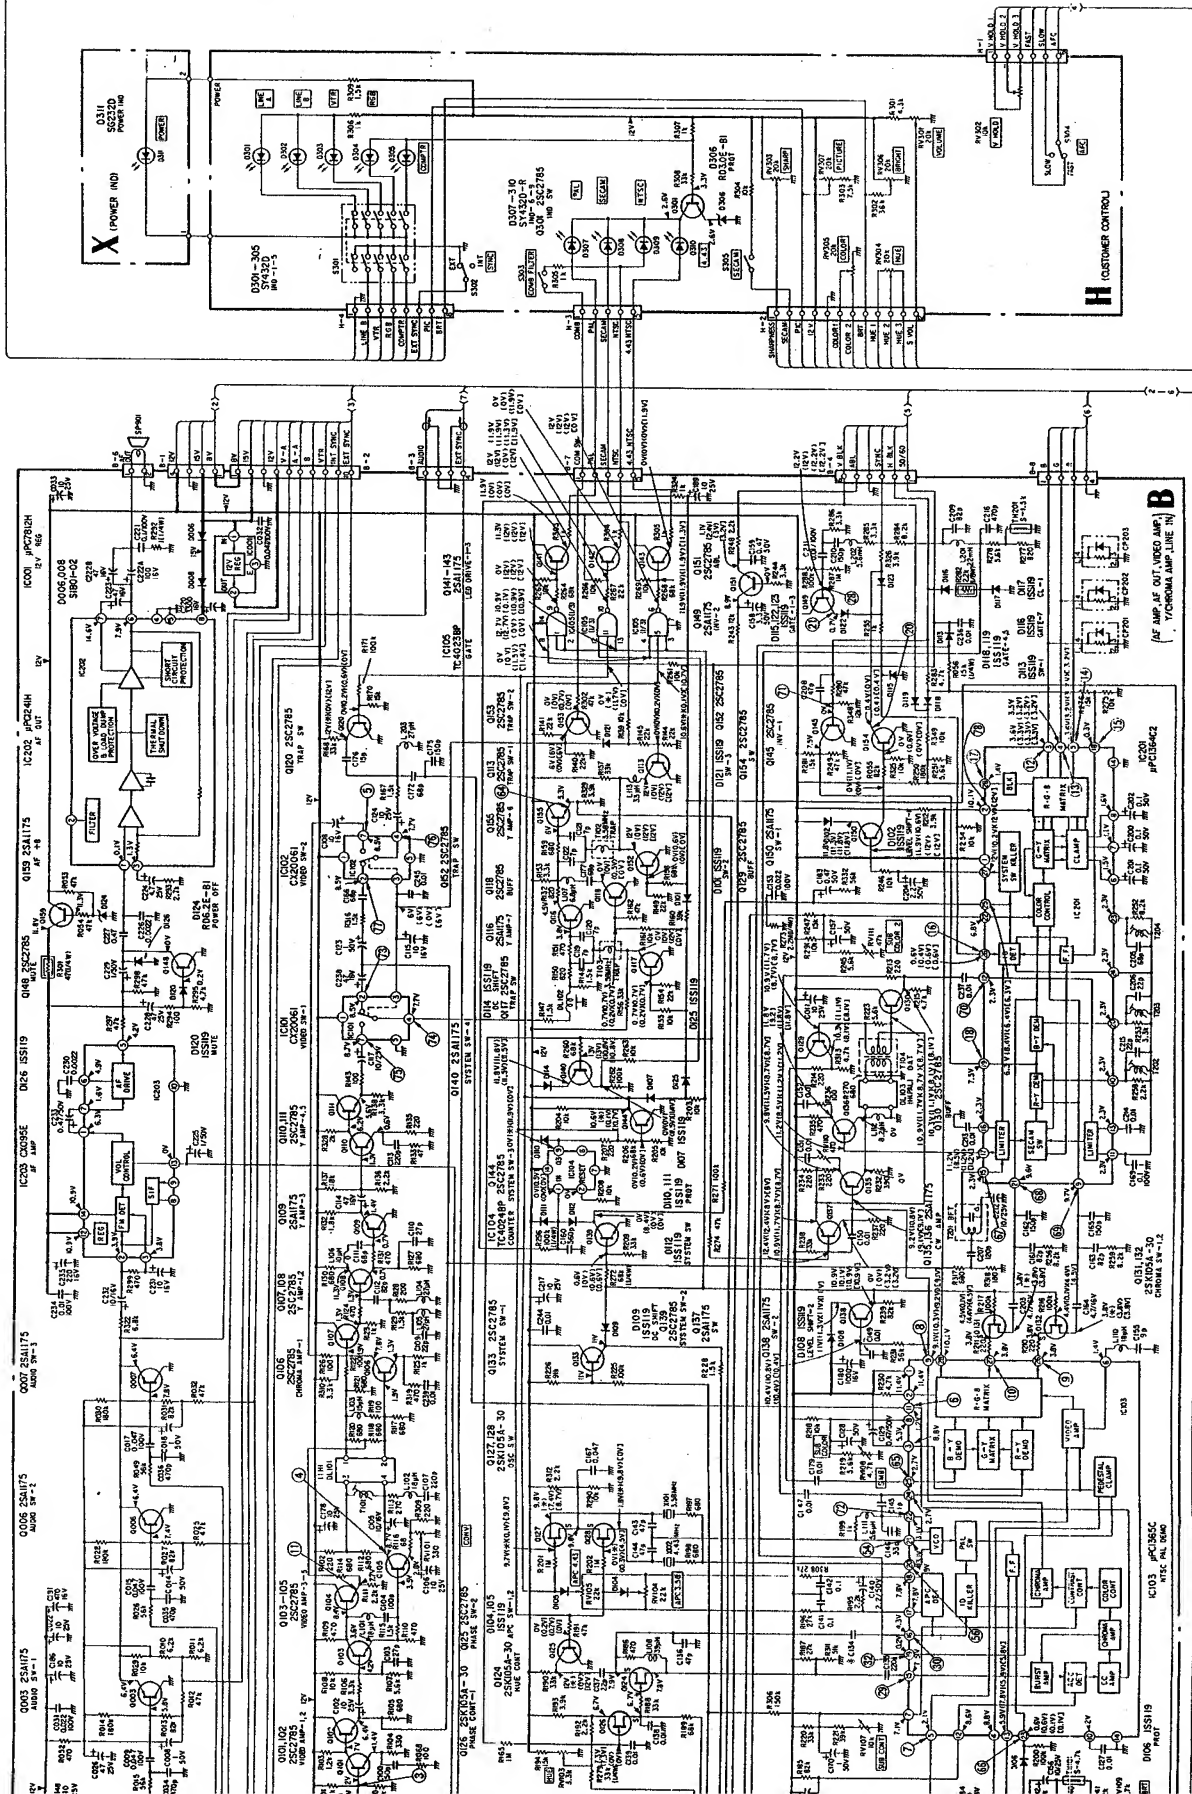

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@maurtron.co.uk

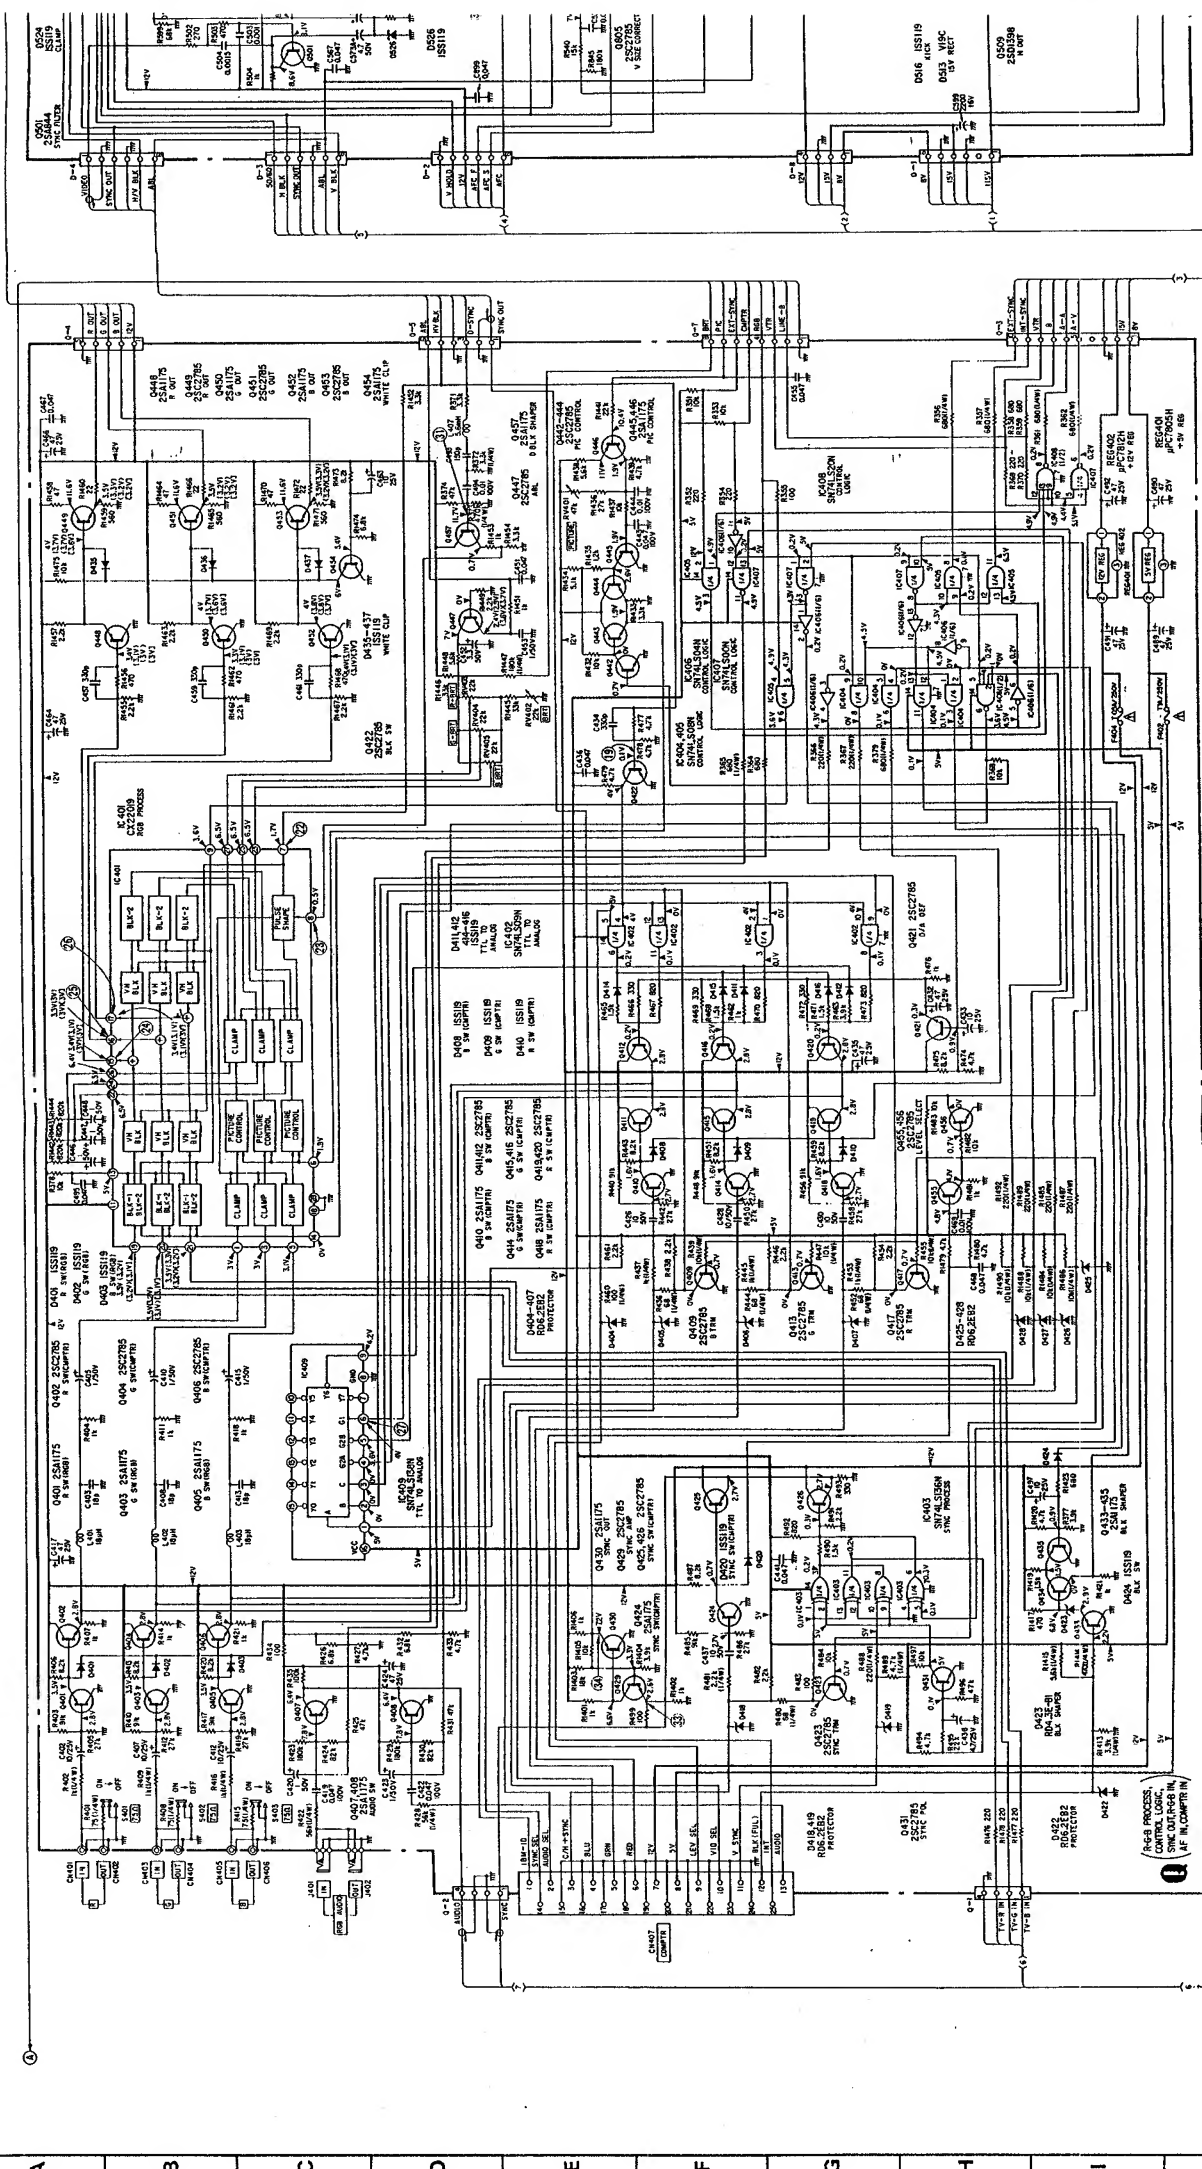


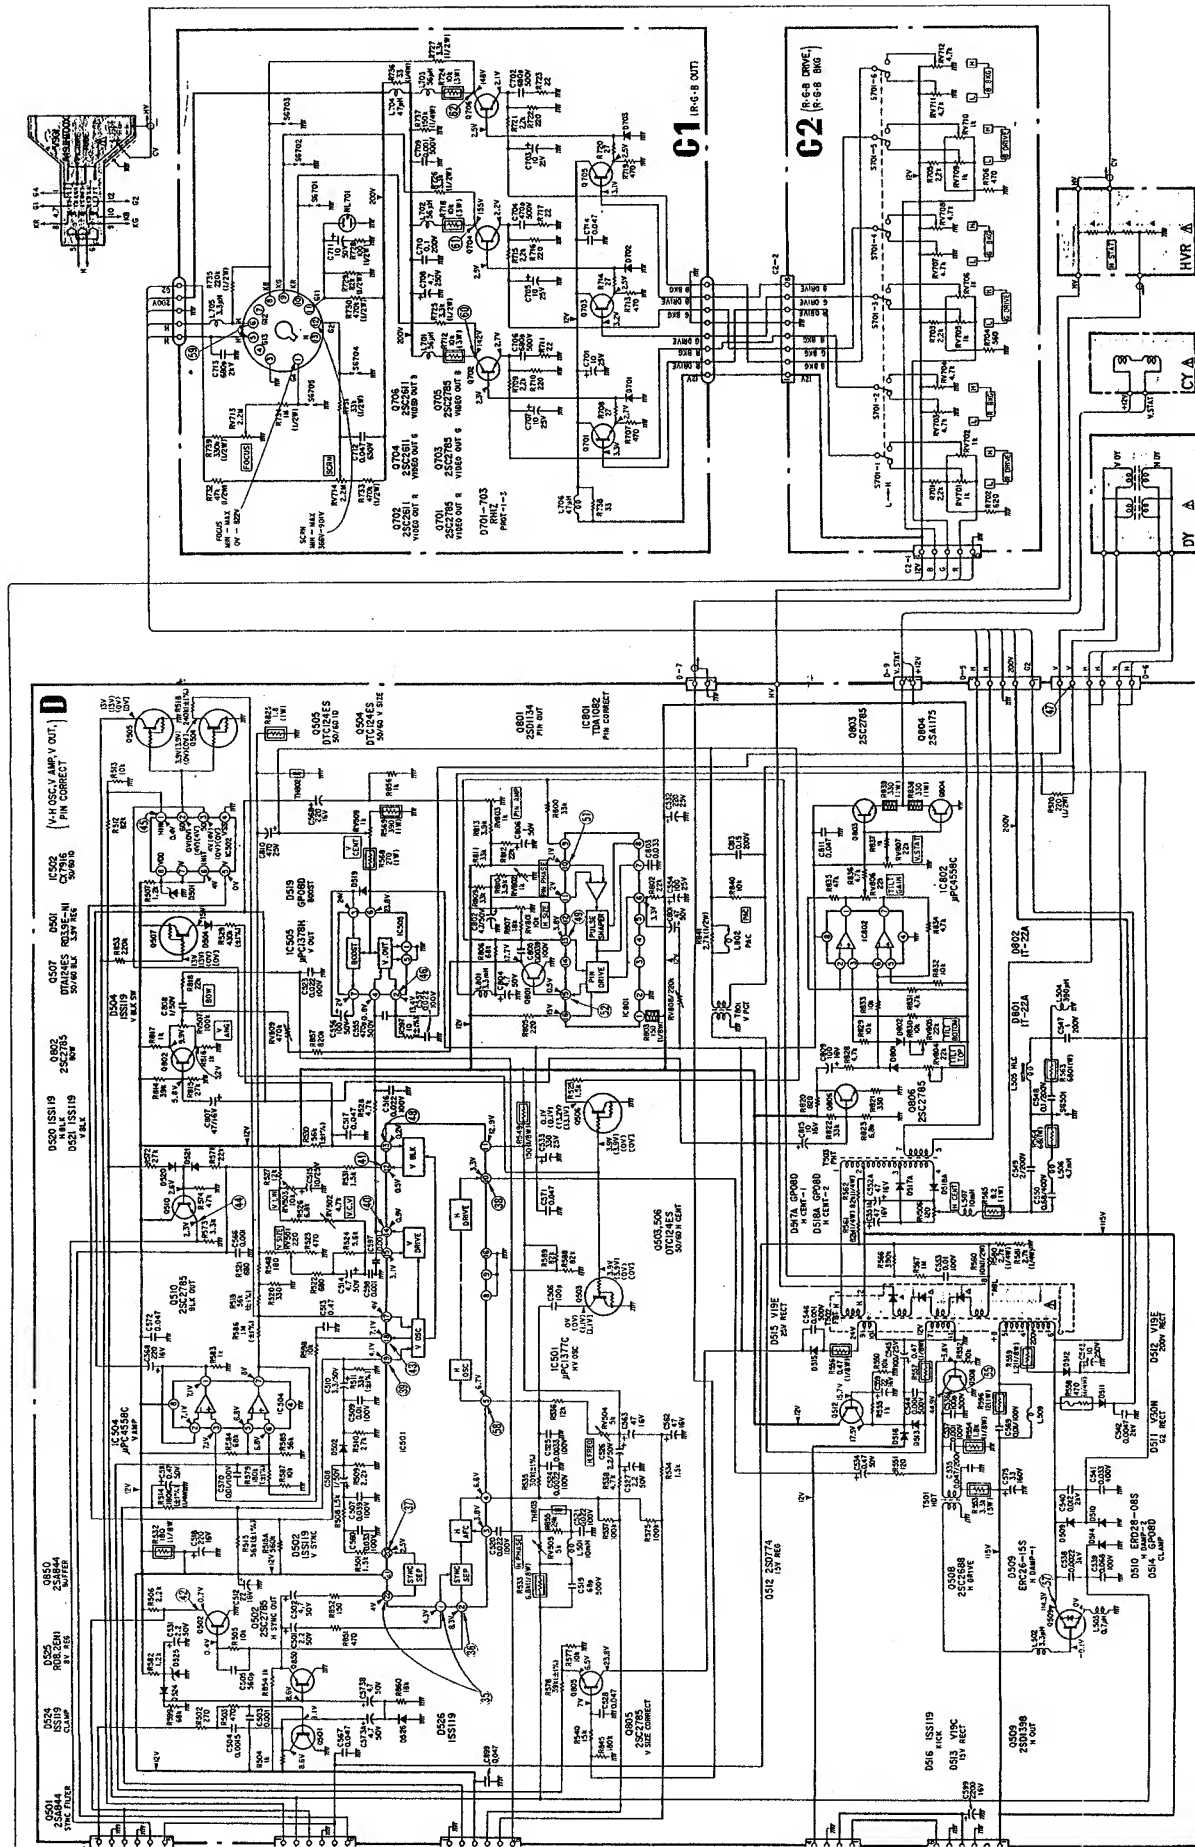


**For Service Manuals Contact**  
**MAURITRON TECHNICAL SERVICES**  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
**Tel: 01844-351694 Fax: 01844-352554**  
**Email: enquiries@mauritron.co.uk**




— GA Board —

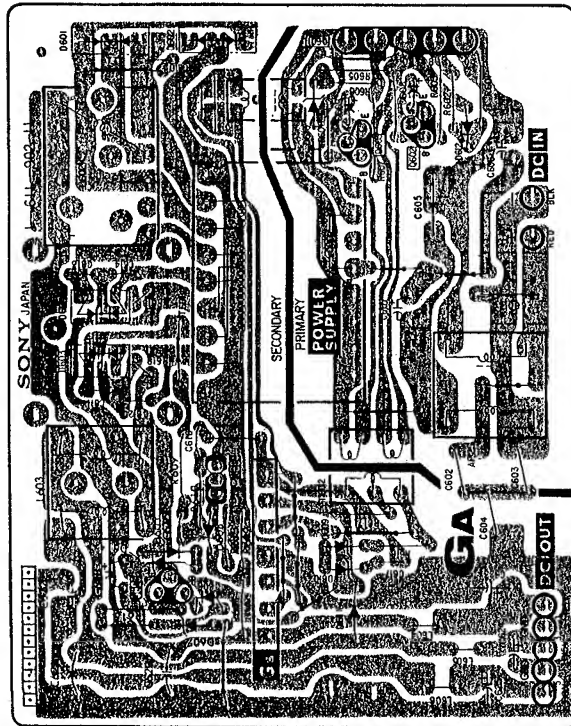


— F Board —

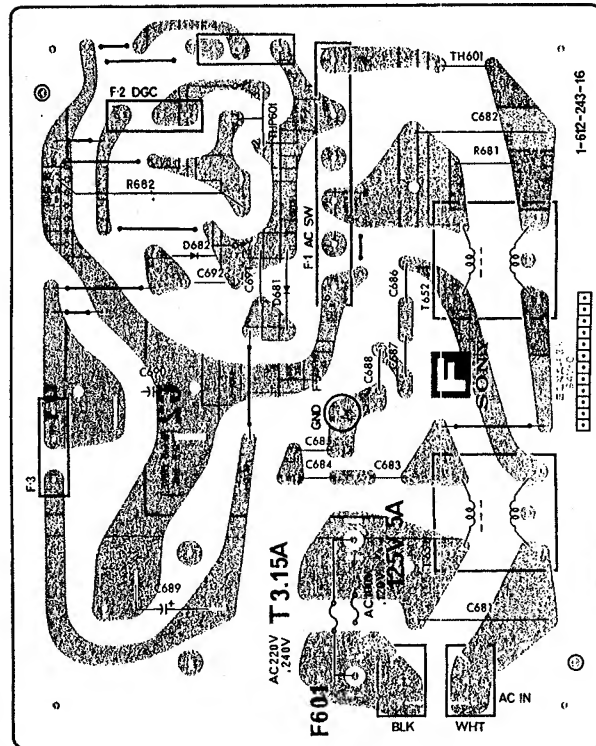

— GB Board —

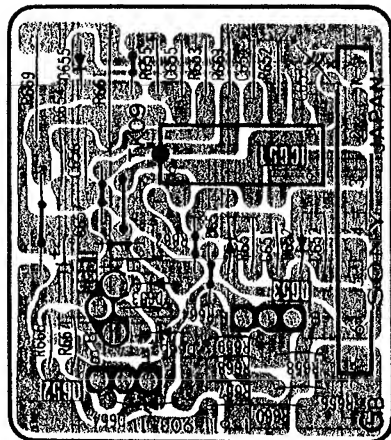


**- X Board -**




**For Service Manuals Contact**  
**MAURITRON TECHNICAL SERVICES**  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
**Tel: 01844-351694 Fax: 01844-352554**  
**Email: [enquiries@mauritron.co.uk](mailto:enquiries@mauritron.co.uk)**

- H Board -

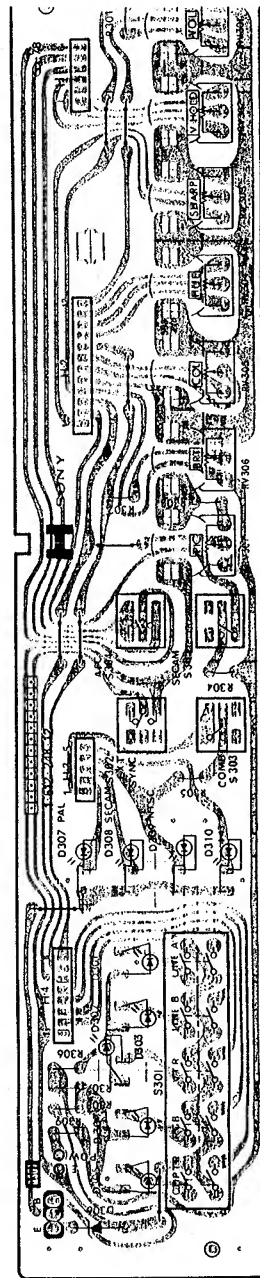

~ B Board ~

IC	111	109	106	126	125	124	144	IC04	130	138	137	136	140	141	142
-	152	106	107	123	121	120	127,128	IC103	133	135	135	151	124	131	143
0	156	104	101	150	122	120	148	IC203	006	007	008	009	010	011	012
	157	101	002	159	003	004	005	006	007	008	009	010	011	012	013
D	121	105	107	106	122	118	110	113	112	114	115	122	118	116	117
	101	104	102	103	120	002	126	108	109	111	112	113	114	115	116
IC01	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC02	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC03	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC04	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC05	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC06	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC07	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC08	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC09	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC10	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC11	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC12	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC13	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC14	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC15	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC16	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC17	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC18	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC19	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC20	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC21	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC22	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC23	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC24	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC25	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC26	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC27	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC28	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC29	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC30	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC31	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC32	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC33	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC34	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC35	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC36	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC37	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC38	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC39	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC40	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC41	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC42	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC43	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC44	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC45	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC46	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC47	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC48	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC49	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC50	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC51	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC52	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC53	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC54	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC55	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC56	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC57	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC58	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC59	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC60	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC61	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC62	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC63	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC64	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC65	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC66	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC67	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC68	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC69	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC70	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC71	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC72	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC73	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC74	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC75	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC76	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC77	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC78	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC79	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC80	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC81	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC82	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC83	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC84	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC85	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC86	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC87	111	110	109	108	107	106	105	104	103	102	101	100	099	098	097
IC88	111	110	109	108	107	106	105	104	103	102	101	100	099	09	

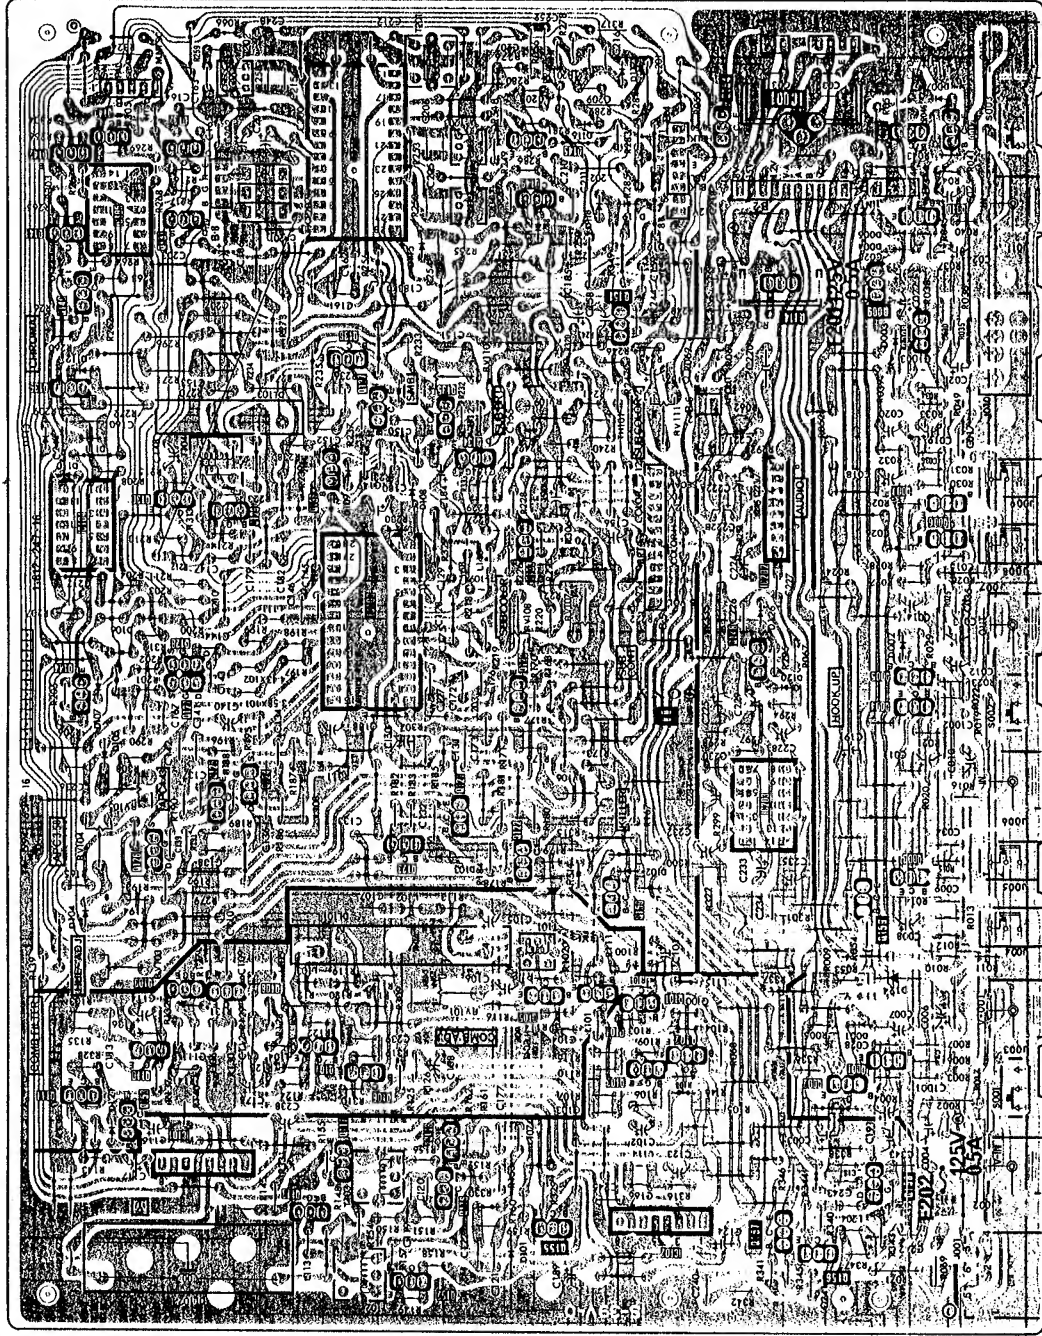





**D** [V · H OSC, V AMP,  
[V OUT, PIN CORRECT.]

PVM-2010QM PVM-2010QM

— D Board —			
Q, IC	D	ADJ	
501	502 510	RV505	RV504
850	520 521 524 525		
503	501, 502		
506	IC501		
504	IC502		
505	805		
507		RV801 RV802 RV803 RV804 RV805 RV806 RV807	
IC504	504		
IC801 802			
801	510 509	RV808 RV809 RV809	
806	519		
IC505	511		
IC 802	512	RV506	
	517A 518A		
	801, 802		
803	515	RV804 RV805 RV806 RV807	
804	516 512		
	513		

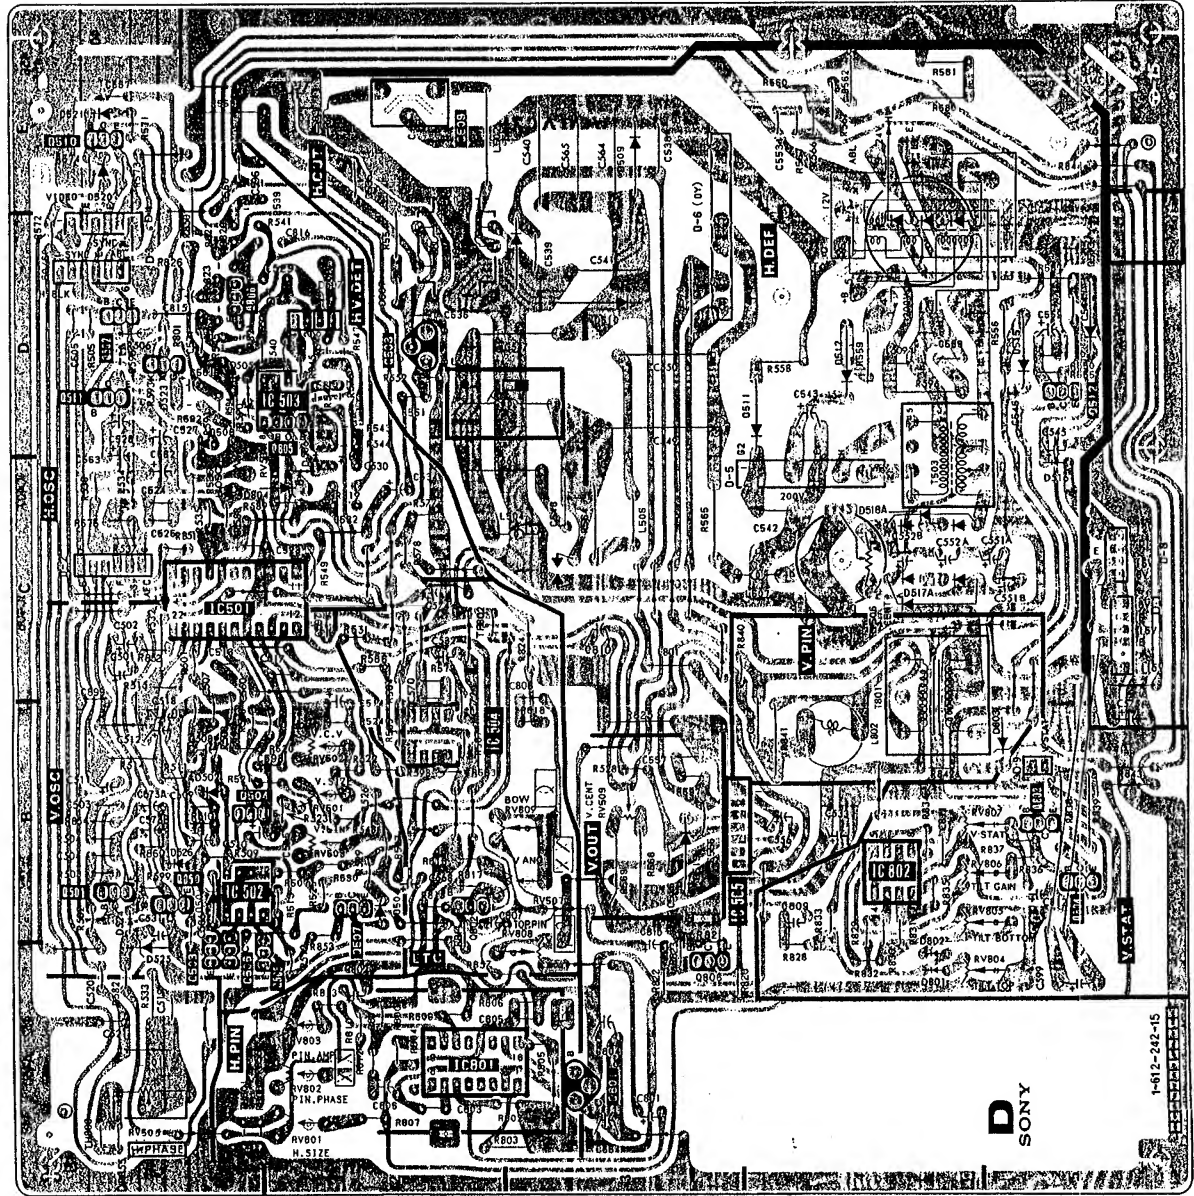

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauritron.co.uk

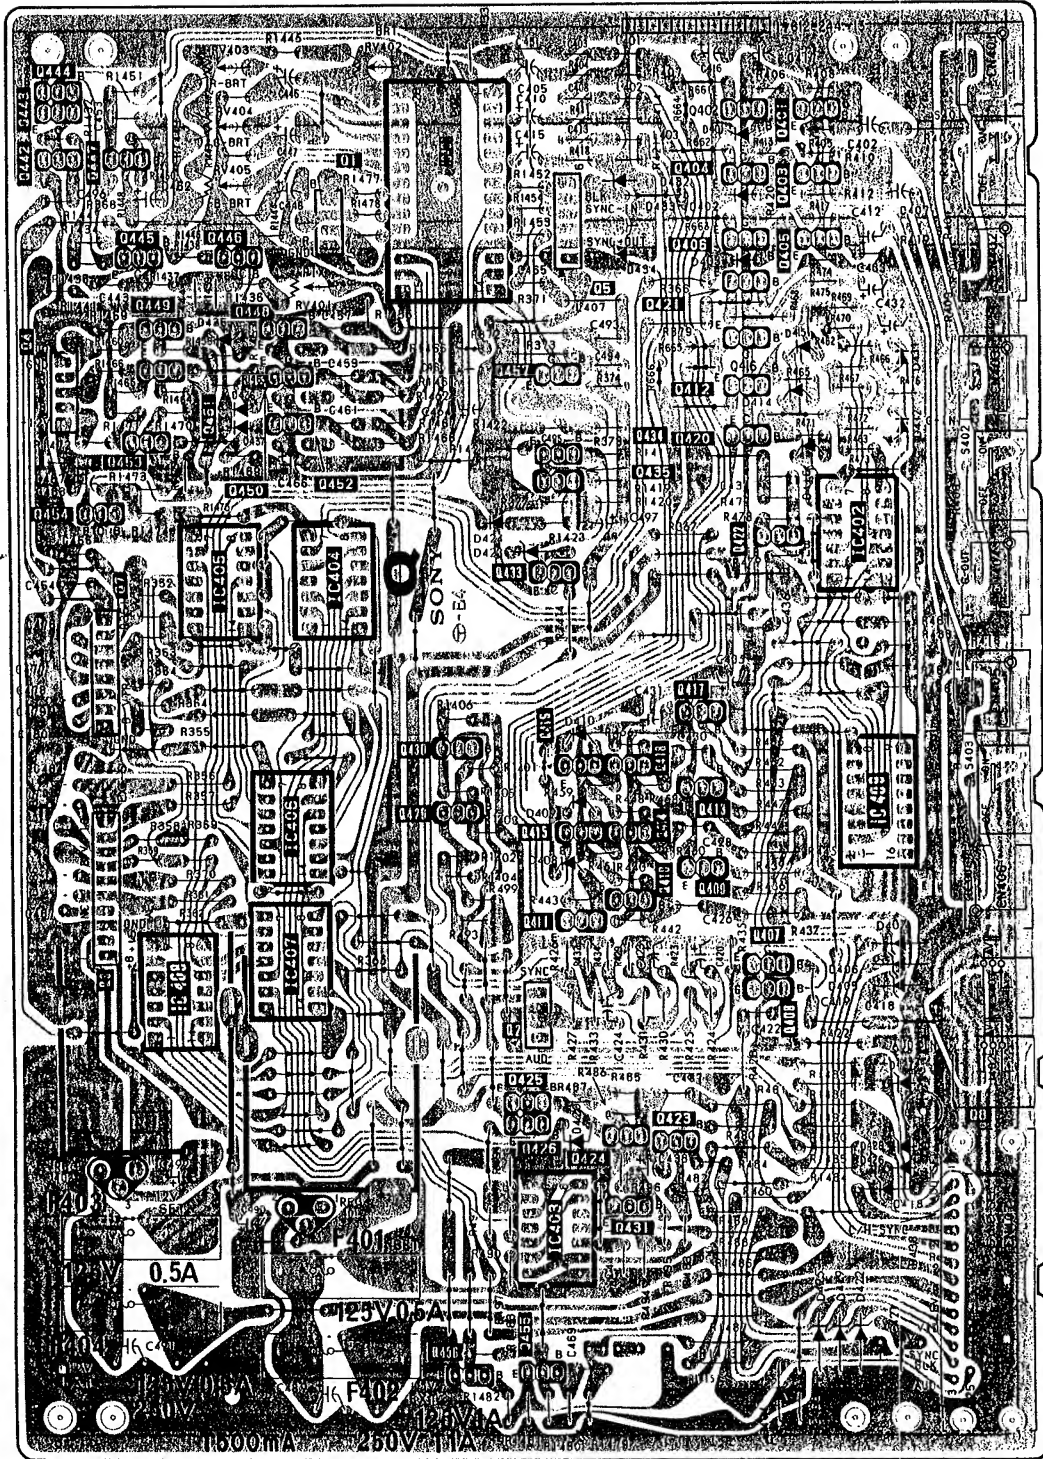[illegible]

C1


[R.G.B OUT]

C2


[R.G.B DRIVE,  
[R.G.B BKG]

PVM-2010QM PVM-2010QM

## 5-6. WAVEFORMS

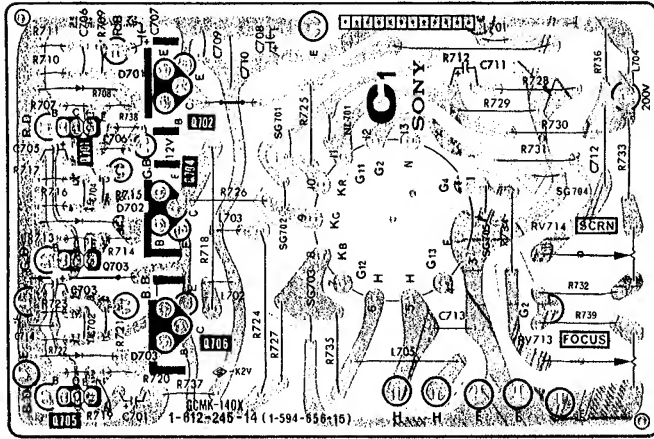

— C1 Board —

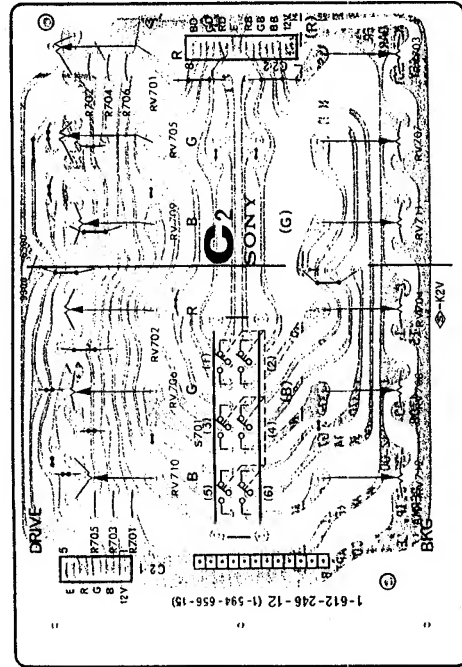

— C2 Board —

## B BOARD

①	PAL	④	SECAM	⑦	SECAM	⑩	NTSC 3.58, 4.43	⑬	PAL	⑮	PAL, SECAM NTSC 3.58, 4.43	⑳	SECAM
②	SECAM	⑤	NTSC 3.58, 4.43	⑧	SECAM	⑪	SECAM	⑭	SECAM	⑯	SECAM	㉑	SECAM
③	PAL	⑥	SECAM	⑨	SECAM	⑫	SECAM	⑬	PAL	⑯	SECAM	㉒	SECAM
④	SECAM	⑤	NTSC 3.58, 4.43	⑧	SECAM	⑪	SECAM	⑫	SECAM	⑬	SECAM	㉓	SECAM
⑤	SECAM	⑥	SECAM	⑨	SECAM	⑫	SECAM	⑬	PAL	⑯	SECAM	㉔	SECAM
⑥	SECAM	⑦	SECAM	⑩	SECAM	⑫	SECAM	⑬	PAL	⑯	SECAM	㉕	SECAM
⑦	SECAM	⑧	SECAM	⑪	SECAM	⑫	SECAM	⑬	PAL	⑯	SECAM	㉖	SECAM
⑧	SECAM	⑨	SECAM	⑫	SECAM	⑬	SECAM	⑭	SECAM	⑯	SECAM	㉗	SECAM
⑨	SECAM	⑩	SECAM	⑫	SECAM	⑬	SECAM	⑭	SECAM	⑯	SECAM	㉘	SECAM
⑩	SECAM	⑪	SECAM	⑫	SECAM	⑬	SECAM	⑭	SECAM	⑯	SECAM	㉙	SECAM
⑪	SECAM	⑫	SECAM	⑬	SECAM	⑭	SECAM	⑮	SECAM	⑯	SECAM	㉚	SECAM
⑫	SECAM	⑬	SECAM	⑭	SECAM	⑮	SECAM	⑯	SECAM	⑰	SECAM	㉛	SECAM
⑬	SECAM	⑭	SECAM	⑮	SECAM	⑯	SECAM	⑰	SECAM	⑱	SECAM	㉜	SECAM
⑭	SECAM	⑮	SECAM	⑯	SECAM	⑰	SECAM	⑱	SECAM	⑲	SECAM	㉝	SECAM
⑮	SECAM	⑯	SECAM	⑰	SECAM	⑱	SECAM	⑲	SECAM	⑳	SECAM	㉞	SECAM
⑯	SECAM	⑰	SECAM	⑱	SECAM	⑲	SECAM	⑳	SECAM	㉑	SECAM	㉟	SECAM
⑰	SECAM	⑱	SECAM	⑲	SECAM	㉑	SECAM	㉒	SECAM	㉓	SECAM	㉜	SECAM
⑱	SECAM	㉑	SECAM	㉒	SECAM	㉓	SECAM	㉔	SECAM	㉕	SECAM	㉖	SECAM
㉑	SECAM	㉒	SECAM	㉓	SECAM	㉔	SECAM	㉕	SECAM	㉖	SECAM	㉗	SECAM
㉒	SECAM	㉓	SECAM	㉔	SECAM	㉕	SECAM	㉖	SECAM	㉗	SECAM	㉘	SECAM
㉓	SECAM	㉔	SECAM	㉕	SECAM	㉖	SECAM	㉗	SECAM	㉘	SECAM	㉙	SECAM
㉔	SECAM	㉕	SECAM	㉖	SECAM	㉗	SECAM	㉘	SECAM	㉙	SECAM	㉚	SECAM
㉕	SECAM	㉖	SECAM	㉗	SECAM	㉘	SECAM	㉙	SECAM	㉚	SECAM	㉛	SECAM
㉖	SECAM	㉗	SECAM	㉘	SECAM	㉙	SECAM	㉚	SECAM	㉛	SECAM	㉜	SECAM
㉗	SECAM	㉘	SECAM	㉙	SECAM	㉚	SECAM	㉛	SECAM	㉜	SECAM	㉝	SECAM
㉘	SECAM	㉙	SECAM	㉚	SECAM	㉛	SECAM	㉜	SECAM	㉝	SECAM	㉞	SECAM
㉙	SECAM	㉚	SECAM	㉛	SECAM	㉜	SECAM	㉝	SECAM	㉞	SECAM	㉟	SECAM
㉚	SECAM	㉛	SECAM	㉜	SECAM	㉝	SECAM	㉞	SECAM	㉟	SECAM	㊱	SECAM
㉛	SECAM	㉜	SECAM	㉝	SECAM	㉞	SECAM	㉟	SECAM	㊱	SECAM	㊲	SECAM
㉜	SECAM	㉝	SECAM	㉞	SECAM	㉟	SECAM	㊱	SECAM	㊲	SECAM	㊳	SECAM
㉝	SECAM	㉞	SECAM	㉟	SECAM	㊱	SECAM	㊲	SECAM	㊳	SECAM	㊴	SECAM
㉞	SECAM	㉟	SECAM	㊱	SECAM	㊲	SECAM	㊳	SECAM	㊴	SECAM	㊵	SECAM
㉟	SECAM	㊱	SECAM	㊲	SECAM	㊳	SECAM	㊴	SECAM	㊵	SECAM	㊶	SECAM
㊱	SECAM	㊲	SECAM	㊳	SECAM	㊴	SECAM	㊵	SECAM	㊶	SECAM	㊷	SECAM
㊲	SECAM	㊳	SECAM	㊴	SECAM	㊵	SECAM	㊶	SECAM	㊷	SECAM	㊸	SECAM
㊳	SECAM	㊴	SECAM	㊵	SECAM	㊶	SECAM	㊷	SECAM	㊸	SECAM	㊹	SECAM
㊴	SECAM	㊵	SECAM	㊶	SECAM	㊷	SECAM	㊸	SECAM	㊹	SECAM	㊺	SECAM
㊵	SECAM	㊶	SECAM	㊷	SECAM	㊸	SECAM	㊹	SECAM	㊺	SECAM	㊻	SECAM
㊶	SECAM	㊷	SECAM	㊸	SECAM	㊹	SECAM	㊺	SECAM	㊻	SECAM	㊼	SECAM
㊷	SECAM	㊸	SECAM	㊹	SECAM	㊺	SECAM	㊻	SECAM	㊼	SECAM	㊽	SECAM
㊸	SECAM	㊹	SECAM	㊺	SECAM	㊻	SECAM	㊼	SECAM	㊽	SECAM	㊾	SECAM
㊹	SECAM	㊺	SECAM	㊻	SECAM	㊼	SECAM	㊽	SECAM	㊾	SECAM	㊿	SECAM
㊺	SECAM	㊻	SECAM	㊼	SECAM	㊽	SECAM	㊾	SECAM	㊿	SECAM		

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauritron.co.uk

## VEFORMS

## RD

10QM	4	SECAM		2.7V p-p (H)	7	SECAM		IV p-p (H)	10	NTSC 3.58, 4.43		14	PAL		18	PAL SECAM NTSC 3.58, 4.43		22	SECAM		65	PAL		68	NTSC 3.58, 4.43		73	PAL		75	NTSC 4.43		78	SECAM		2.6V p-p (H)
SECAM	4	NTSC 3.58, 4.43		1.8V p-p (H)	7	NTSC 3.58, 4.43		1.4V p-p (H)	10	PAL		14	SECAM		18	6.5V p-p (H) (PAL) 10V p-p (H) (SECAM) 9.5V p-p (H) (3.58) 9.5V p-p (H) (4.43)		22	NTSC 3.58, 4.43		65	SECAM		68	PAL		73	SECAM		75	PAL		78	NTSC 3.58, 4.43		2.6V p-p (H)
SECAM	5	PAL		2.2V p-p (H)	8	PAL		4.4V p-p (H)	10	SECAM		14	NTSC 3.58, 4.43		18	PAL SECAM NTSC 3.58, 4.43		22	PAL		65	NTSC 3.58, 4.43		68	SECAM		73	NTSC 3.58, 4.43		75	SECAM		78	SECAM		2.6V p-p (H)
PAL	5	SECAM		2.8V p-p (H)	8	SECAM		0.02V p-p (H)	10	PAL		14	NTSC 3.58, 4.43		18	5.5V p-p (H) (PAL) 0.05V p-p (H) (SECAM) 6V p-p (H) (3.58) 6V p-p (H) (4.43)		22	PAL SECAM NTSC 3.58, 4.43		65	PAL SECAM		68	PAL		73	PAL		75	NTSC 3.58		78	SECAM		3V p-p (H)
SECAM	5	NTSC 3.58		2.8V p-p (H)	8	NTSC 3.58, 4.43		0.45V p-p (H) (3.58) 0.35V p-p (H) (4.43)	10	PAL		14	PAL		18	PAL, SECAM NTSC 3.58, 4.43		22	PAL		65	NTSC 3.58, 4.43		68	PAL		73	PAL		75	NTSC 3.58		78	SECAM		2.8V p-p (H)
NTSC 3.58, 4.43	5	NTSC 3.58, 4.43		2.8V p-p (H)	8	NTSC 3.58, 4.43		0.9V p-p (H)	10	SECAM		14	SECAM		18	3.4V p-p (H) (PAL) 3V p-p (H) (SECAM) 3.6V p-p (H) (3.58) 3.4V p-p (H) (4.43)		22	PAL SECAM NTSC 3.58, 4.43		65	NTSC 3.58, 4.43		68	PAL		73	NTSC 3.58		75	NTSC 4.43		78	SECAM		3.2V p-p (H)
SECAM	6	PAL		0.32V p-p (H)	9	SECAM		0.45V p-p (H)	10	SECAM		14	SECAM		18	1.1V p-p (4.43MHz) (PAL) 0.55V p-p (4.43MHz) (SECAM) 2.2V p-p (3.58MHz) (3.58) 2.4V p-p (4.43MHz) (4.43)		22	PAL SECAM NTSC 3.58, 4.43		65	PAL		68	SECAM		73	NTSC 3.58		75	PAL		78	SECAM		2.8V p-p (H)
PAL	6	SECAM		0.32V p-p (H)	9	SECAM		0.45V p-p (H)	10	SECAM		14	SECAM		18	1.1V p-p (4.43MHz) (PAL) 0.55V p-p (4.43MHz) (SECAM) 2.2V p-p (3.58MHz) (3.58) 2.4V p-p (4.43MHz) (4.43)		22	PAL SECAM NTSC 3.58, 4.43		65	SECAM		68	SECAM		73	NTSC 3.58		75	SECAM		78	SECAM		2.8V p-p (H)
SECAM	6	SECAM		0.48V p-p (H)	9	SECAM		0.5V p-p (H)	10	PAL		14	PAL SECAM NTSC 3.58, 4.43		18	2.8V p-p (H) (PAL) 2.5V p-p (H) (SECAM) 7.5V p-p (H) (3.58) 4V p-p (H) (4.43)		22	PAL SECAM NTSC 3.58, 4.43		65	SECAM		68	PAL		73	PAL		75	SECAM		78	SECAM		2.8V p-p (H)
NTSC 3.58, 4.43	6	NTSC 3.58, 4.43		0.5V p-p (H)	9	NTSC 3.58, 4.43		1.1V p-p (H)	10	PAL		14	SECAM		18	1.6V p-p (H) (3.58) 1.8V p-p (H) (4.43)		22	PAL SECAM NTSC 3.58, 4.43		65	SECAM		68	PAL		73	PAL		75	SECAM		78	SECAM		2.8V p-p (H)
PAL	7	PAL		0.9V p-p (H)	10	SECAM		0.9V p-p (H)	13	SECAM		17	SECAM		21	12V p-p (H)		25	NTSC 3.58, 4.43		69	SECAM		72	PAL SECAM NTSC 3.58, 4.43		76	SECAM		79	PAL		82	SECAM		1.8V p-p (H)

## Q BOARD

19	 1.8Vp-p (H)	25	 6Vp-p (H)	34	 SECAM 1.7Vp-p (H)
22	 11Vp-p (H)	26	 SECAM 7.5Vp-p (H)	34	 NTSC 3.58, 4.43 1.5Vp-p (H) (3.58) 1.8Vp-p (H) (4.43)
23	 9Vp-p (H)	26	 NTSC 3.58, 4.43 3.5Vp-p (H) (3.58) 4.4Vp-p (H) (4.43)	34	 SECAM 1.5Vp-p (H) (3.58) 1.8Vp-p (H) (4.43)
24	 PAL 6Vp-p (H)	27	 5Vp-p (H)	34	 SECAM 1.5Vp-p (H) (3.58) 1.8Vp-p (H) (4.43)
24	 SECAM 6Vp-p (H)	31	 PAL, SECAM NTSC 3.58, 4.43 2.8Vp-p (H) (PAL) 2.4Vp-p (H) (SECAM) 2.8Vp-p (H) (3.58) 2.8Vp-p (H) (4.43)	34	 SECAM 1.5Vp-p (H) (3.58) 1.8Vp-p (H) (4.43)
24	 NTSC 3.58, 4.43 3.5Vp-p (H) (3.58) 4.4Vp-p (H) (4.43)	33	 PAL 0.35Vp-p (H)	34	 SECAM 0.42Vp-p (H)
25	 PAL 5.6Vp-p (H)	33	 SECAM 0.42Vp-p (H)	34	 NTSC 3.58, 4.43 0.48Vp-p (H) (3.58) 0.48Vp-p (H) (4.43)
25	 SECAM 6Vp-p (H)	33	 NTSC 3.58, 4.43 3.5Vp-p (H) (3.58) 4.4Vp-p (H) (4.43)	34	 PAL 2.4Vp-p (H)
25	 NTSC 3.58, 4.43 3.5Vp-p (H) (3.58) 4.4Vp-p (H) (4.43)	34	 PAL 2.4Vp-p (H)	34	 SECAM 1.5Vp-p (H) (3.58) 1.8Vp-p (H) (4.43)

## D BOARD

35	 PAL 1.5Vp-p (H)	43	 3.2Vp-p (V)	57	 820Vp-p (H)
35	 SECAM 1.6Vp-p (H)	44	 14Vp-p (H)	58	 4.4Vp-p (H)
35	 NTSC 3.58, 4.43 1.7Vp-p (H) (3.58) 1.8Vp-p (H) (4.43)	45	 4.4Vp-p (H)	58	 4.4Vp-p (H)
36	 9Vp-p (H)	46	 50Vp-p (V)	58	 4.4Vp-p (H)
37	 8Vp-p (H)	47	 24Vp-p (V)	58	 4.4Vp-p (H)
38	 8Vp-p (H)	48	 5Vp-p (V)	58	 4.4Vp-p (H)
39	 4Vp-p (V)	49	 2.1Vp-p (V)	58	 4.4Vp-p (H)
40	 2.5Vp-p (V)	51	 0.7Vp-p (V)	58	 4.4Vp-p (H)
41	 11.5Vp-p (V)	52	 0.35Vp-p (V)	58	 4.4Vp-p (H)
42	 10Vp-p (H)	55	 110Vp-p (H)	58	 4.4Vp-p (H)

## C1 BOARD

59	 19Vp-p (H)	60	 PAL 90Vp-p (H)	60	 SECAM 115Vp-p (H)
60	 NTSC 3.58, 4.43 110Vp-p (H)	61	 PAL 90Vp-p (H)	61	 SECAM 90Vp-p (H)
61	 NTSC 3.58, 4.43 90Vp-p (H)	62	 PAL 100Vp-p (H)	62	 SECAM 105Vp-p (H)
62	 NTSC 3.58, 4.43 100Vp-p (H)	62	 PAL 100Vp-p (H)	62	 SECAM 105Vp-p (H)

## GA BOARD

63	 19Vp-p (H) 300Vp-p (H)
----	-------------------------------

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel: 01844-351694 Fax: 01844-352554  
 Email: enquiries@mauritron.co.uk



## SECTION 6 EXPLODED VIEWS

### NOTE:


- Items with no part number and no designation are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.

- Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

The components identified by circled numbers are critical for safety. Replace only with part number specified.

### (1) CABINET ASSY

■: TA, BV3x8 7-685-646-79

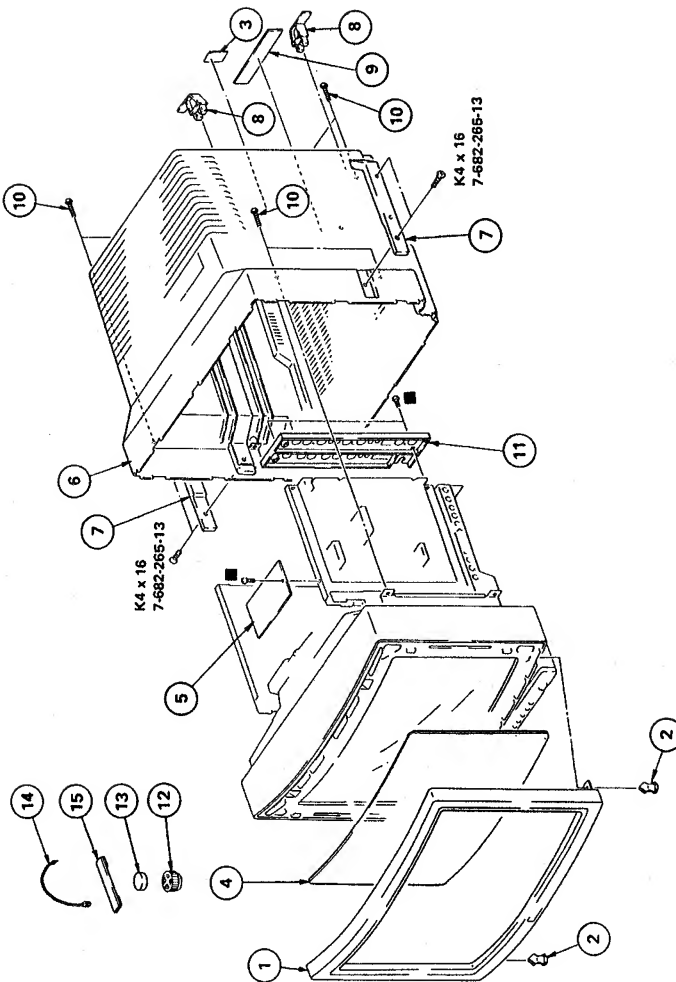


No.	Part No.	Description	No.	Remark	Part No.	Description	Remark
1	X-4370-904-1	PANEL ASSY, FRONT	9		4-370-907-01	SHEET (B), R-IND	
2	4-370-920-01	C.P.P. PANEL	10		4-304-494-21	SCREEN, TAPPING, +PHX16	
3	*4-361-314-01	PANEL, MODE. NUMBER	11		4-370-930-01	PANEL, CONNECTOR	
4	4-370-925-01	FILTER	12		1-452-094-00	MAGNET, ROTABLE DISK; 15MM Ø	
5	*1-612-246-11	C2 BOARD	13		1-452-032-00	MAGNET, DISK; 10MM Ø	
6	X-4370-903-1	CABINET ASSY	14	7, 8, 9	4-308-870-00	C.P.P. LEAD WIRE	
7	X-4370-906-1	HANDLE ASSY	15		X-4308-815-0	PERMANENT ASSY, CONVERGENCE	
8	4-316-003-00	HOLDER, CORD					

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel: 01844-351694 Fax: 01844-352554  
Email: enquiries@mauriton.co.uk

## (2) CHASSIS ASS'Y

■ : TA, BV3x8 7-685-646-79

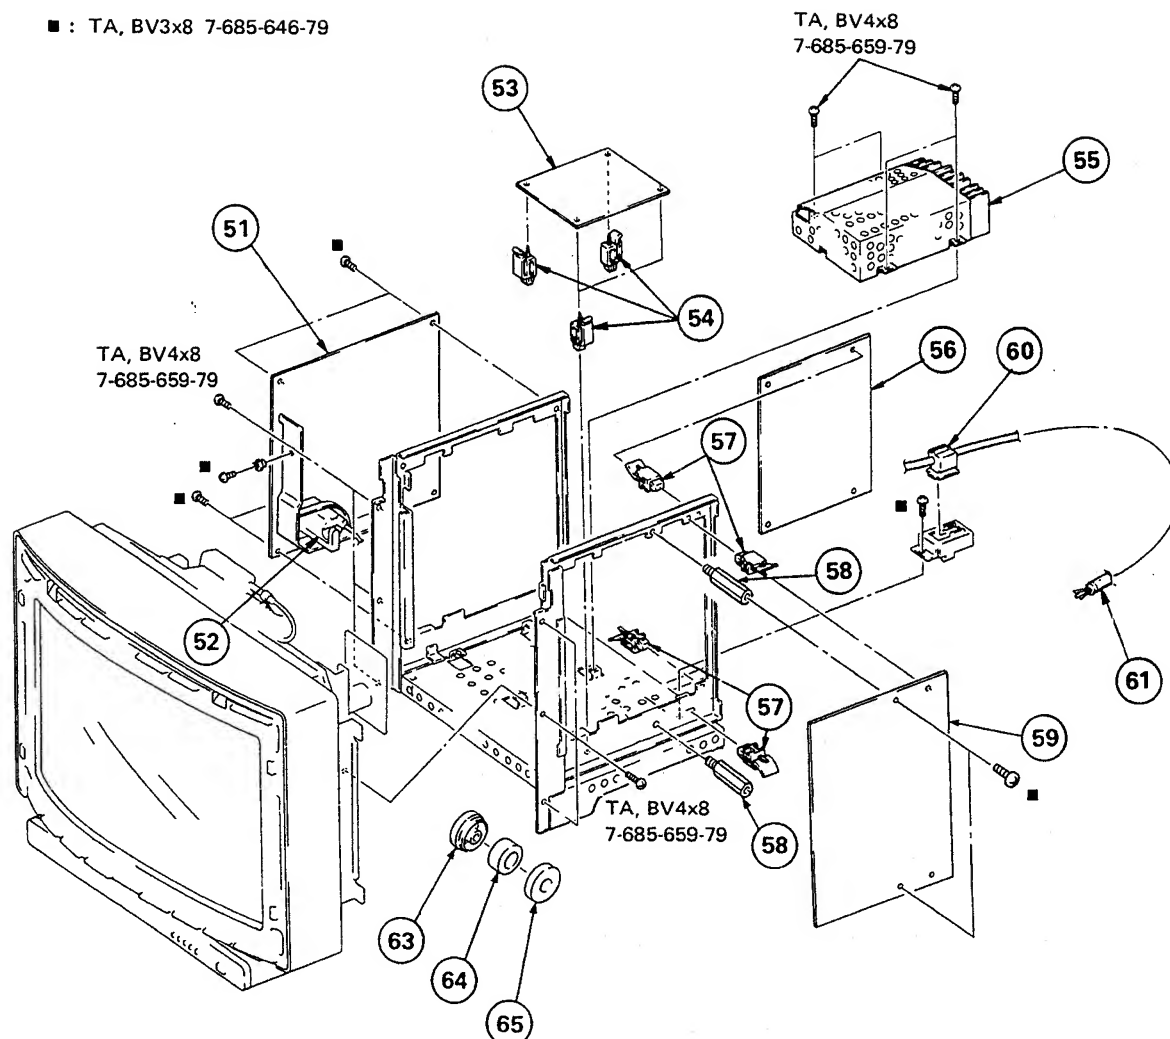

No.	Part No.	Description
51	*A-1345-455-A	D BOARD, COMPLETE
52	▲1-439-322-12	TRANSFORMER ASSY, FLYBACK
53	*1-612-243-11	F BOARD
54	*3-659-681-00	HOLDER, PC BOARD
55	▲1-413-179-11	SWITCHING REGULATOR (TK-09)
56	*A-1275-050-A	Q BOARD, COMPLETE
57	*3-703-141-00	HOLDER, PCB
58	*3-670-570-41	SPACER, SUPPORT


No.	Part No.	Description	Remark
59	*A-1135-239-A	B BOARD, COMPLETE	126, 128
60	▲4-364-745-01	BUSHING, AC CORD	
61	▲1-534-820-13	POWER CORD	
63	1-543-179-00	CORE, RING	
64	*4-361-124-01	COVER (A), CORE	
65	*4-361-125-01	COVER (B), CORE	

The components identified by shading and mark ▲ are critical for safety. Replace only with part number specified.



(3) BEZEL ASSY

■ : TA, BV3x12 7-685-648-79

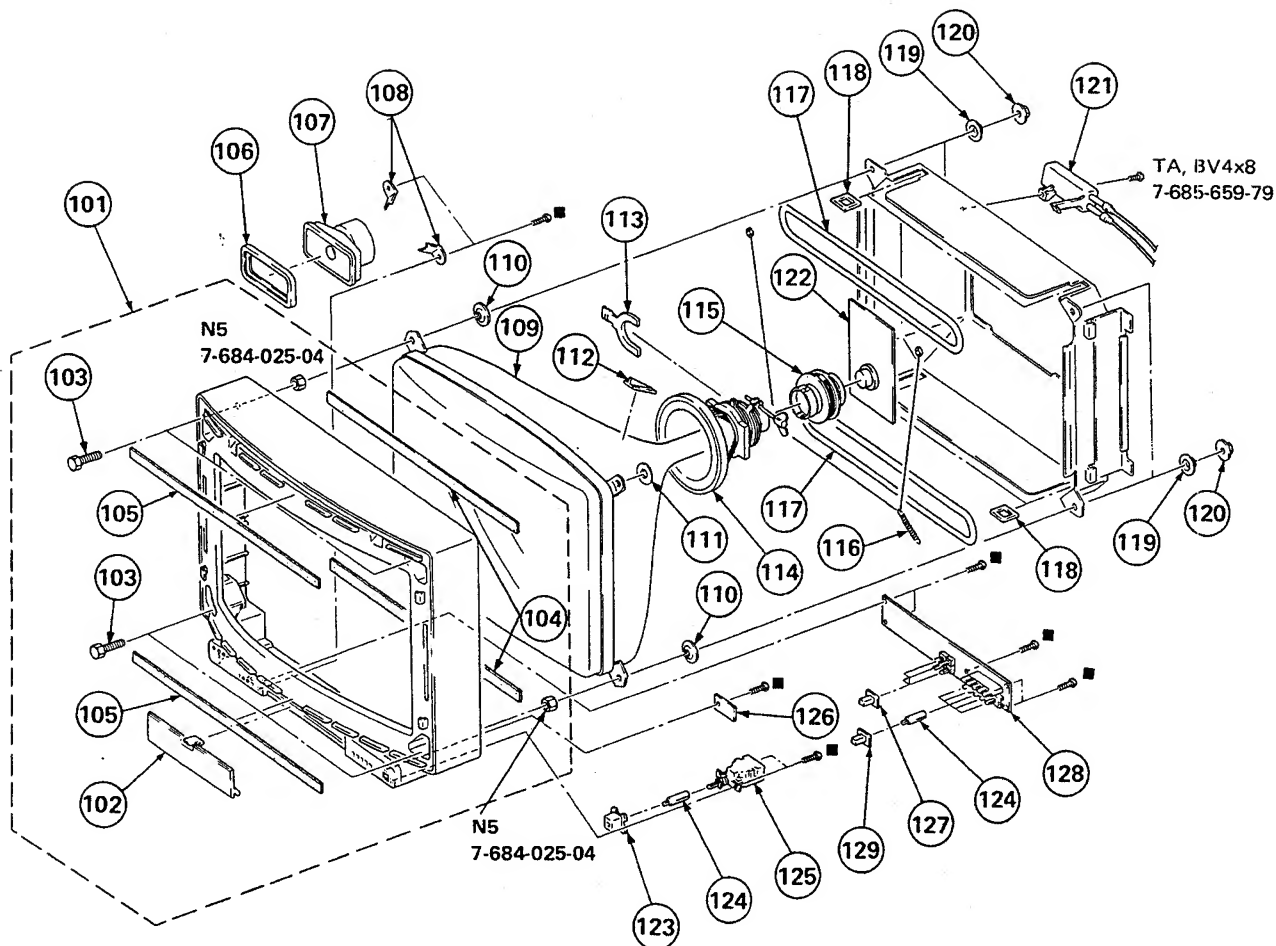

No.	Part No.	Description	Remark	No.	Part No.	Description	Remark
101	X-4363-306-1	BEZEL ASSY	102,103,104,105	115	▲1-452-337-11	NECK ASSY, CRT (NA304)	
102	X-4370-907-1	DOOR ASSY		116	4-303-774-XX	SPRING	
103	3-703-025-12	BOLT M5, HEXAGON-HEAD		117	▲1-426-087-42	COIL, DEGAUSSING	
104	4-304-087-02	CUSHION, (A) PICTURE TUBE		118	*4-322-922-00	HOLDER, COIL, DEGAUSSER	
105	4-312-539-00	CUSHION (A), BEZEL		119	4-026-534-00	WASHER, POSITION	
106	*4-364-741-00	CUSHION, SPEAKER		120	4-306-034-00	FLANGE NUT, (B) 5MM	
107	1-503-109-00	SPEAKER		121	▲1-228-482-14	RESISTOR ASSY HIGH-VOLTAGE	
108	*4-321-611-00	CLAW, RETAINING, SPEAKER		122	*A-1330-507-A	C1 BOARD, COMPLETE	
109	▲8-737-251-05	PICTURE TUBE (A49JHT00X)		123	4-346-409-11	BUTTON, POWER	
110	4-373-615-02	WASHER, CRT POSITIONING		124	*4-370-903-01	SHAFT, BUTTON	
111	4-801-003-00	WASHER, FLAT (DIA. 16)		125	▲1-554-967-12	SWITCH, PUSH (AC POWER)(1 KEY)	
112	3-703-961-01	SPACER, DY		126	*1-612-249-11	X BOARD	
113	1-452-146-00	BMC MAGNET		127	4-369-627-01	PUSH BUTTON	
114	▲1-451-204-63	DEFLECTION YOKE (SY-108B)		128	*1-612-248-11	H BOARD	
				129	4-349-408-00	PUSH BUTTON	

The components identified by shading and mark ▲ are critical for safety. Replace only with part number specified.

## SECTION 7 ELECTRICAL PARTS LIST

**B**

**NOTE:**

The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.

• Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

When indicating parts by reference number, please include the board name.

• All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

**CAPACITORS**  
 • MF :  $\mu$ F, PF :  $\mu$ F

**RESISTORS**  
 • All resistors are in ohms  
 • F : nonflammable

**COILS**  
 • MMH : mH, UH :  $\mu$ H

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
	*A-1135-239-A	B BOARD, COMPLETE *****		C103	1-102-961-00	CERAMIC 27PF	5% 50V
	*3-538-178-00	HEAT SINK		C104	1-102-973-00	CERAMIC 100PF	5% 50V
	*4-323-833-00	HEAT SINK, PIN OUT		C105	1-123-356-00	ELECT 10MF	20% 16V
				C106	1-123-356-00	ELECT 10MF	20% 25V
				C107	1-102-978-00	CERAMIC 220PF	5% 50V
		<b>CONNECTOR</b>		C108	1-123-356-00	ELECT 10MF	20% 16V
B1	*1-560-124-00	P.LUG, CONNECTOR (2.5MM) 4P		C109	1-102-959-00	CERAMIC 22PF	5% 50V
B2	*1-560-224-00	P.LUG, CONNECTOR (2.5MM) 10P		C110	1-102-961-00	CERAMIC 27PF	5% 50V
B3	*1-560-124-00	P.LUG, CONNECTOR (2.5MM) 4P		C111	1-101-888-00	CERAMIC 68PF	5% 50V
B4	*1-560-126-00	P.LUG, CONNECTOR (2.5MM) 6P		C112	1-102-971-00	CERAMIC 82PF	5% 50V
B5	*1-560-156-00	P.LUG, CONNECTOR (2.5MM PITCH)		C113	1-102-978-00	CERAMIC 220PF	5% 50V
B6	*1-560-290-00	P.LUG, CONNECTOR (2.5MM PITCH)		C114	1-123-332-00	ELECT 47MF	20% 16V
B7	*1-560-125-00	P.LUG, CONNECTOR (2.5MM) 5P		C115	1-123-356-00	ELECT 10MF	20% 16V
B8	*1-560-124-00	P.LUG, CONNECTOR (2.5MM) 4P		C117	1-123-356-00	ELECT 10MF	20% 25V
		<b>CAPACITOR</b>		C119	1-102-944-00	CERAMIC 7PF	0.5PF 50V
C003	1-123-356-00	ELECT 10MF	20% 25V	C120	1-102-944-00	CERAMIC 7PF	0.5PF 50V
C004	1-123-356-00	ELECT 10MF	20% 25V	C121	1-102-944-00	CERAMIC 7PF	0.5PF 50V
C005	1-123-356-00	ELECT 10MF	20% 25V	C122	1-102-944-00	CERAMIC 7PF	0.5PF 50V
C006	1-123-356-00	ELECT 10MF	20% 25V	C123	1-123-380-00	ELECT 1MF	20% 50V
C007	1-123-356-00	ELECT 10MF	20% 25V	C124	1-123-356-00	ELECT 10MF	20% 25V
C008	1-123-380-00	ELECT 1MF	20% 50V	C127	1-101-004-00	CERAMIC 0.01MF	50V
C009	1-106-383-00	MYLAR 0.047MF	10% 100V	C128	1-123-380-00	ELECT 1MF	20% 50V
C010	1-123-356-00	ELECT 10MF	20% 25V	C129	1-123-379-00	ELECT 0.47MF	20% 50V
C011	1-123-356-00	ELECT 10MF	20% 25V	C130	1-123-380-00	ELECT 1MF	20% 50V
C012	1-123-356-00	ELECT 10MF	20% 25V	C131	1-106-220-00	MYLAR 0.1MF	10% 100V
C013	1-123-356-00	ELECT 10MF	20% 25V	C132	1-106-220-00	MYLAR 0.1MF	10% 100V
C014	1-123-380-00	ELECT 1MF	20% 50V	C133	1-123-332-00	ELECT 47MF	16V
C015	1-106-383-00	MYLAR 0.047MF	10% 100V	C134	1-101-880-00	CERAMIC 47PF	5% 50V
C017	1-106-383-00	MYLAR 0.047MF	10% 100V	C135	1-101-004-00	CERAMIC 0.01MF	50V
C018	1-123-380-00	ELECT 1MF	20% 50V	C136	1-101-880-00	CERAMIC 47PF	5% 50V
C019	1-123-356-00	ELECT 10MF	20% 25V	C137	1-102-959-00	CERAMIC 22PF	5% 50V
C020	1-123-356-00	ELECT 10MF	20% 25V	C138	1-101-004-00	CERAMIC 0.01MF	50V
C021	1-123-356-00	ELECT 10MF	20% 25V	C139	1-130-483-00	MYLAR 0.01MF	5% 50V
C022	1-123-356-00	ELECT 10MF	20% 25V	C140	1-123-381-00	ELECT 2.2MF	20% 50V
C023	1-123-356-00	ELECT 10MF	20% 25V	C141	1-161-772-11	CERAMIC 0.1MF	10% 25V
C024	1-123-356-00	ELECT 10MF	20% 25V	C142	1-161-772-11	CERAMIC 0.1MF	10% 25V
C025	1-123-356-00	ELECT 10MF	20% 25V	C143	1-101-880-00	CERAMIC 47PF	5% 50V
C026	1-123-332-00	ELECT 47MF	20% 25V	C144	1-101-880-00	CERAMIC 47PF	5% 50V
C027	1-123-356-00	ELECT 10MF	20% 25V	C145	1-102-934-00	CERAMIC 1PF	0.25PF 50V
C028	1-102-961-00	CERAMIC 27PF	5% 50V	C146	1-102-963-00	CERAMIC 33PF	5% 50V
C029	1-102-961-00	CERAMIC 27PF	5% 50V	C147	1-101-004-00	CERAMIC 0.01MF	50V
C030	1-102-961-00	CERAMIC 27PF	5% 50V	C148	1-123-356-00	ELECT 10MF	20% 25V
C031	1-106-375-12	MYLAR 0.022MF	10% 100V	C150	1-101-004-00	CERAMIC 0.01MF	50V
C032	1-106-383-00	MYLAR 0.047MF	10% 100V	C151	1-101-004-00	CERAMIC 0.01MF	50V
C033	1-123-356-00	ELECT 10MF	20% 25V	C152	1-101-004-00	CERAMIC 0.01MF	50V
C034	1-102-114-00	CERAMIC 470PF	10% 50V	C153	1-106-375-12	MYLAR 0.022MF	10% 100V
C035	1-102-114-00	CERAMIC 470PF	10% 50V	C155	1-102-946-00	CERAMIC 9PF	0.5PF 50V
C036	1-102-114-00	CERAMIC 470PF	10% 50V	C157	1-123-380-00	ELECT 1MF	20% 50V
C100	1-101-361-00	CERAMIC 150PF	5% 50V	C158	1-123-382-00	ELECT 3.3MF	20% 50V
C101	1-123-332-00	ELECT 47MF	20% 16V	C159	1-124-049-00	ELECT 0.47MF	20% 50V
C102	1-123-356-00	ELECT 10MF	20% 25V	C160	1-102-115-00	CERAMIC 560PF	10% 50V
				C161	1-102-971-00	CERAMIC 82PF	5% 50V
				C162	1-101-361-00	CERAMIC 150PF	5% 50V

B

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
C163	1-102-971-00	CERAMIC	82PF 5% 50V	C233	1-123-379-00	ELECT	0.47MF 20% 50V
C164	1-121-257-00	ELECT	4.7MF 16V	C234	1-106-367-00	MYLAR	0.01MF 10% 100V
C165	1-101-361-00	CERAMIC	150PF 5% 50V	C235	1-123-321-00	ELECT	220MF 20% 16V
C166	1-101-888-00	CERAMIC	68PF 5% 50V	C236	1-101-004-00	CERAMIC	0.01MF 50V
C167	1-101-006-00	CERAMIC	0.047MF 50V	C237	1-161-330-00	CERAMIC	0.01MF 30% 25V
C169	1-106-220-00	MYLAR	0.1MF 10% 100V	C238	1-123-332-00	ELECT	47MF 20% 16V
C170	1-123-380-00	ELECT	1MF 20% 50V	C239	1-101-004-00	CERAMIC	0.01MF 50V
C172	1-101-888-00	CERAMIC	68PF 5% 50V	C240	1-102-959-00	CERAMIC	22PF 5% 50V
C173	1-106-359-00	MYLAR	0.0047MF 10% 100V	C241	1-102-959-00	CERAMIC	22PF 5% 50V
C175	1-101-361-00	CERAMIC	150PF 5% 50V	C242	1-123-356-00	ELECT	10MF 20% 25V
C176	1-102-951-00	CERAMIC	15PF 5% 50V	C243	1-101-004-00	CERAMIC	0.01MF 50V
C177	1-101-888-00	CERAMIC	68PF 5% 50V	C244	1-101-004-00	CERAMIC	0.01MF 50V
C178	1-123-356-00	ELECT	10MF 20% 25V	C245	1-101-004-00	CERAMIC	0.01MF 50V
C179	1-101-004-00	CERAMIC	0.01MF 50V	C343	1-101-004-00	CERAMIC	0.01MF 50V
C180	1-123-324-00	ELECT	1000MF 20% 16V	<u>DIODE</u>			
C183	1-123-379-00	ELECT	0.47MF 20% 50V	D001	8-719-911-19	DIODE 1SS119	
C184	1-123-356-00	ELECT	10MF 20% 25V	D002	8-719-911-19	DIODE 1SS119	
C186	1-123-356-00	ELECT	10MF 20% 25V	D003	8-719-911-19	DIODE 1SS119	
C187	1-101-004-00	CERAMIC	0.01MF 50V	D004	8-719-911-19	DIODE 1SS119	
C188	1-123-356-00	ELECT	10MF 20% 25V	D005	8-719-911-19	DIODE 1SS119	
C189	1-123-356-00	ELECT	10MF 20% 25V	D006	8-719-200-02	DIODE 10E2	
C190	1-123-356-00	ELECT	10MF 20% 25V	D007	8-719-911-19	DIODE 1SS119	
C191	1-123-323-00	ELECT	470MF 20% 16V	D008	8-719-200-02	DIODE 10E2	
C200	1-124-463-00	ELECT	0.1MF 20% 50V	D101	8-719-911-19	DIODE 1SS119	
C201	1-124-463-00	ELECT	0.1MF 20% 50V	D102	8-719-911-19	DIODE 1SS119	
C202	1-124-463-00	ELECT	0.1MF 20% 50V	D103	8-719-908-06	DIODE ERA81-005	
C203	1-121-257-00	ELECT	4.7MF 16V	D104	8-719-911-19	DIODE 1SS119	
C204	1-123-381-00	ELECT	2.2MF 20% 50V	D105	8-719-911-19	DIODE 1SS119	
C205	1-101-888-00	CERAMIC	68PF 5% 50V	D106	8-719-911-19	DIODE 1SS119	
C206	1-102-892-00	CERAMIC	22PF 5% 50V	D107	8-719-911-19	DIODE 1SS119	
C207	1-102-679-00	CERAMIC	120PF 5% 50V	D108	8-719-911-19	DIODE 1SS119	
C208	1-101-880-00	CERAMIC	47PF 5% 50V	D109	8-719-911-19	DIODE 1SS119	
C209	1-102-971-00	CERAMIC	82PF 5% 50V	D110	8-719-911-19	DIODE 1SS119	
C210	1-101-361-00	CERAMIC	150PF 5% 50V	D111	8-719-911-19	DIODE 1SS119	
C211	1-106-367-00	MYLAR	0.01MF 10% 100V	D112	8-719-911-19	DIODE 1SS119	
C212	1-123-356-00	ELECT	10MF 20% 25V	D113	8-719-911-19	DIODE 1SS119	
C213	1-101-004-00	CERAMIC	0.01MF 50V	D114	8-719-911-19	DIODE 1SS119	
C214	1-130-483-00	MYLAR	0.01MF 5% 50V	D115	8-719-911-19	DIODE 1SS119	
C215	1-102-892-00	CERAMIC	22PF 5% 50V	D116	8-719-911-19	DIODE 1SS119	
C216	1-102-824-00	CERAMIC	470PF 5% 50V	D117	8-719-911-19	DIODE 1SS119	
C217	1-123-356-00	ELECT	10MF 20% 25V	D118	8-719-911-19	DIODE 1SS119	
C220	1-123-326-00	ELECT	3300MF 20% 16V	D119	8-719-911-19	DIODE 1SS119	
C221	1-106-220-00	MYLAR	0.1MF 10% 100V	D120	8-719-911-19	DIODE 1SS119	
C223	1-123-332-00	ELECT	47MF 20% 16V	D121	8-719-911-19	DIODE 1SS119	
C224	1-123-369-00	ELECT	4.7MF 20% 25V	D122	8-719-911-19	DIODE 1SS119	
C225	1-123-380-00	ELECT	1MF 20% 50V	D123	8-719-911-19	DIODE 1SS119	
C226	1-102-121-00	CERAMIC	0.0022MF 10% 50V	D124	8-719-100-38	DIODE RD6.2E-82	
C227	1-130-491-00	MYLAR	0.047MF 5% 50V	D125	8-719-911-19	DIODE 1SS119	
C228	1-123-332-00	ELECT	47MF 20% 25V	D126	8-719-911-19	DIODE 1SS119	
C229	1-123-380-00	ELECT	1MF 20% 50V	<u>DELAY LINE</u>			
C230	1-102-121-00	CERAMIC	0.0022MF 10% 50V	D101	1-415-280-00	DELAY LINE (1H)	
C231	1-123-356-00	ELECT	10MF 20% 16V				
C232	1-123-356-00	ELECT	10MF 20% 16V				

B

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
D102	1-415-188-00	DELAY LINE		Q104	8-729-178-54	TRANSISTOR 2SC2785	
D103	1-415-122-31	DELAY LINE, 1H (PAL)		Q105	8-729-178-54	TRANSISTOR 2SC2785	
				Q106	8-729-178-54	TRANSISTOR 2SC2785	
				Q107	8-729-178-54	TRANSISTOR 2SC2785	
				Q108	8-729-178-54	TRANSISTOR 2SC2785	
				Q109	8-729-117-54	TRANSISTOR 2SA1175	
				Q110	8-729-178-54	TRANSISTOR 2SC2785	
				Q111	8-729-178-54	TRANSISTOR 2SC2785	
				Q113	8-729-178-54	TRANSISTOR 2SC2785	
				Q116	8-729-117-54	TRANSISTOR 2SA1175	
				Q117	8-729-178-54	TRANSISTOR 2SC2785	
				Q118	8-729-178-54	TRANSISTOR 2SC2785	
				Q120	8-729-178-54	TRANSISTOR 2SC2785	
				Q121	8-729-117-54	TRANSISTOR 2SA1175	
				Q122	8-729-178-54	TRANSISTOR 2SC2785	
J1	1-562-121-00	CONNECTOR, DIN 6P		Q123	8-729-178-54	TRANSISTOR 2SC2785	
J2	1-536-842-11	TERMINAL BOARD, INPUT/OUTPUT(A)		Q124	8-769-200-30	TRANSISTOR 2SK107-3	
				Q125	8-729-178-54	TRANSISTOR 2SC2785	
				Q126	8-729-115-30	TRANSISTOR 2SK105A-30	
				Q127	8-729-115-30	TRANSISTOR 2SK105A-30	
L101	1-408-412-00	MICRO INDUCTOR 18UH		Q128	8-729-115-30	TRANSISTOR 2SK105A-30	
L102	1-408-412-00	MICRO INDUCTOR 18UH		Q129	8-729-178-54	TRANSISTOR 2SC2785	
L103	1-408-411-00	MICRO INDUCTOR 15UH		Q130	8-729-178-54	TRANSISTOR 2SC2785	
L104	1-408-414-00	MICRO INDUCTOR 27UH		Q131	8-729-115-30	TRANSISTOR 2SK105A-30	
L105	1-408-414-00	MICRO INDUCTOR 27UH		Q132	8-729-115-30	TRANSISTOR 2SK105A-30	
L106	1-408-409-00	MICRO INDUCTOR 10UH		Q133	8-729-178-54	TRANSISTOR 2SC2785	
L107	1-408-407-00	MICRO INDUCTOR 6.8UH		Q135	8-729-117-54	TRANSISTOR 2SA1175	
L108	1-408-416-00	MICRO INDUCTOR 39UH		Q136	8-729-117-54	TRANSISTOR 2SA1175	
L110	1-408-412-00	MICRO INDUCTOR 18UH		Q137	8-729-117-54	TRANSISTOR 2SA1175	
L111	1-408-406-00	MICRO INDUCTOR 5.6UH		Q138	8-729-117-54	TRANSISTOR 2SA1175	
L112	1-408-408-00	MICRO INDUCTOR 8.2UH		Q139	8-729-178-54	TRANSISTOR 2SC2785	
L113	1-408-415-00	MICRO INDUCTOR 33UH		Q140	8-729-117-54	TRANSISTOR 2SA1175	
L201	1-408-245-00	MICRO INDUCTOR 22MMH		Q141	8-729-117-54	TRANSISTOR 2SA1175	
L202	1-408-163-00	MICRO INDUCTOR 5.6MMH		Q142	8-729-117-54	TRANSISTOR 2SA1175	
L203	1-408-414-00	MICRO INDUCTOR 27UH		Q143	8-729-117-54	TRANSISTOR 2SA1175	
L204	1-408-421-00	MICRO INDUCTOR 100UH		Q144	8-729-178-54	TRANSISTOR 2SC2785	
				Q145	8-729-178-54	TRANSISTOR 2SC2785	
				Q148	8-729-178-54	TRANSISTOR 2SC2785	
				Q149	8-729-117-54	TRANSISTOR 2SA1175	
				Q150	8-729-117-54	TRANSISTOR 2SA1175	
Q001	8-729-178-54	TRANSISTOR 2SC2785		Q151	8-729-178-54	TRANSISTOR 2SC2785	
Q002	8-729-117-54	TRANSISTOR 2SA1175		Q152	8-729-178-54	TRANSISTOR 2SC2785	
Q003	8-729-117-54	TRANSISTOR 2SA1175		Q153	8-729-178-54	TRANSISTOR 2SC2785	
Q004	8-729-117-54	TRANSISTOR 2SA1175		Q154	8-729-178-54	TRANSISTOR 2SC2785	
Q005	8-729-178-54	TRANSISTOR 2SC2785		Q155	8-729-178-54	TRANSISTOR 2SC2785	
Q006	8-729-117-54	TRANSISTOR 2SA1175		Q156	8-729-178-54	TRANSISTOR 2SC2785	
Q007	8-729-117-54	TRANSISTOR 2SA1175		Q157	8-729-178-54	TRANSISTOR 2SC2785	
Q008	8-729-178-54	TRANSISTOR 2SC2785		Q158	8-769-200-30	TRANSISTOR 2SK107-3	
Q009	8-729-117-54	TRANSISTOR 2SA1175		Q159	8-729-117-54	TRANSISTOR 2SA1175	
Q010	8-729-178-54	TRANSISTOR 2SC2785					
Q011	8-729-178-54	TRANSISTOR 2SC2785					
Q012	8-729-117-54	TRANSISTOR 2SA1175					
Q101	8-729-178-54	TRANSISTOR 2SC2785					
Q102	8-729-178-54	TRANSISTOR 2SC2785					
Q103	8-729-178-54	TRANSISTOR 2SC2785					
				<u>RESISTOR</u>			
				JW5	1-247-717-11	CARBON 2.2K 5%	1/4W
				R002	1-249-417-11	CARBON 1K 5%	1/6W

B

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
R003	1-249-434-11	CARBON	27K 5% 1/6W	R102	1-249-409-11	CARBON	220 5% 1/6W
R004	1-249-424-11	CARBON	3.9K 5% 1/6W	R103	1-249-418-11	CARBON	1.2K 5% 1/6W
R005	1-249-421-11	CARBON	2.2K 5% 1/6W	R104	1-249-411-11	CARBON	330 5% 1/6W
R006	1-249-439-11	CARBON	68K 5% 1/6W	R105	1-249-415-11	CARBON	680 5% 1/6W
R007	1-249-433-11	CARBON	22K 5% 1/6W	R106	1-249-423-11	CARBON	3.3K 5% 1/6W
R009	1-215-440-00	CARBON	6.2K 5% 1/6W	R107	1-249-426-11	CARBON	5.6K 5% 1/6W
R010	1-215-440-00	CARBON	6.2K 5% 1/6W	R108	1-249-429-11	CARBON	10K 5% 1/6W
R011	1-215-440-00	CARBON	6.2K 5% 1/6W	R109	1-249-413-11	CARBON	470 5% 1/6W
R012	1-249-437-11	CARBON	47K 5% 1/6W	R110	1-249-413-11	CARBON	470 5% 1/6W
R013	1-249-440-11	CARBON	82K 5% 1/6W	R111	1-249-421-11	CARBON	2.2K 5% 1/6W
R014	1-247-885-00	CARBON	180K 5% 1/6W	R112	1-249-415-11	CARBON	680 5% 1/6W
R015	1-249-438-11	CARBON	56K 5% 1/6W	R113	1-249-410-11	CARBON	270 5% 1/6W
R016	1-249-417-11	CARBON	1K 5% 1/6W	R114	1-249-415-11	CARBON	680 5% 1/6W
R017	1-215-394-00	CARBON	75 5% 1/6W	R115	1-249-419-11	CARBON	1.5K 5% 1/6W
R019	1-215-394-00	CARBON	75 5% 1/6W	R116	1-249-403-11	CARBON	68 5% 1/6W
R020	1-249-434-11	CARBON	27K 5% 1/6W	R117	1-249-415-11	CARBON	680 5% 1/6W
R021	1-249-424-11	CARBON	3.9K 5% 1/6W	R118	1-249-415-11	CARBON	680 5% 1/6W
R022	1-249-433-11	CARBON	22K 5% 1/6W	R119	1-249-405-11	CARBON	100 5% 1/6W
R023	1-249-439-11	CARBON	68K 5% 1/6W	R120	1-249-415-11	CARBON	680 5% 1/6W
R024	1-215-440-00	CARBON	6.2K 5% 1/6W	R121	1-249-415-11	CARBON	680 5% 1/6W
R025	1-249-437-11	CARBON	47K 5% 1/6W	R122	1-249-405-11	CARBON	100 5% 1/6W
R026	1-249-438-11	CARBON	56K 5% 1/6W	R123	1-249-417-11	CARBON	1K 5% 1/6W
R027	1-249-440-11	CARBON	82K 5% 1/6W	R124	1-249-413-11	CARBON	470 5% 1/6W
R028	1-247-885-00	CARBON	180K 5% 1/6W	R125	1-249-417-11	CARBON	1K 5% 1/6W
R029	1-249-429-11	CARBON	10K 5% 1/6W	R126	1-249-405-11	CARBON	100 5% 1/6W
R030	1-247-885-00	CARBON	180K 5% 1/6W	R127	1-249-415-11	CARBON	680 5% 1/6W
R031	1-249-440-11	CARBON	82K 5% 1/6W	R128	1-247-814-00	CARBON	200 5% 1/6W
R032	1-249-437-11	CARBON	47K 5% 1/6W	R129	1-249-419-11	CARBON	1.5K 5% 1/6W
R033	1-249-433-11	CARBON	22K 5% 1/6W	R130	1-249-415-11	CARBON	680 5% 1/6W
R034	1-249-439-11	CARBON	68K 5% 1/6W	R131	1-249-413-11	CARBON	470 5% 1/6W
R035	1-249-417-11	CARBON	1K 5% 1/6W	R132	1-249-420-11	CARBON	1.8K 5% 1/6W
R036	1-215-394-00	CARBON	75 5% 1/6W	R133	1-249-401-11	CARBON	47 5% 1/6W
R037	1-249-434-11	CARBON	27K 5% 1/6W	R135	1-249-409-11	CARBON	220 5% 1/6W
R038	1-249-424-11	CARBON	3.9K 5% 1/6W	R136	1-249-421-11	CARBON	2.2K 5% 1/6W
R039	1-215-440-00	CARBON	6.2K 5% 1/6W	R137	1-249-432-11	CARBON	18K 5% 1/6W
R040	1-249-439-11	CARBON	68K 5% 1/6W	R138	1-249-423-11	CARBON	3.3K 5% 1/6W
R041	1-215-394-00	CARBON	75 5% 1/6W	R139	1-249-429-11	CARBON	10K 5% 1/6W
R042	1-249-434-11	CARBON	27K 5% 1/6W	R140	1-249-433-11	CARBON	22K 5% 1/6W
R043	1-215-468-00	CARBON	91K 5% 1/6W	R141	1-249-433-11	CARBON	22K 5% 1/6W
R045	1-249-429-11	CARBON	10K 5% 1/6W	R143	1-249-405-11	CARBON	100 5% 1/6W
R046	1-249-428-11	CARBON	8.2K 5% 1/6W	R144	1-249-433-11	CARBON	22K 5% 1/6W
R049	1-249-438-11	CARBON	56K 5% 1/6W	R145	1-249-433-11	CARBON	22K 5% 1/6W
R051	1-249-421-11	CARBON	2.2K 5% 1/6W	R147	1-249-419-11	CARBON	1.5K 5% 1/6W
R052	1-249-413-11	CARBON	470 5% 1/6W	R148	1-249-419-11	CARBON	1.5K 5% 1/6W
R053	1-249-437-11	CARBON	47K 5% 1/6W	R149	1-249-433-11	CARBON	22K 5% 1/6W
R054	1-249-437-11	CARBON	47K 5% 1/6W	R150	1-249-416-11	CARBON	820 5% 1/6W
R055	1-249-440-11	CARBON	82K 5% 1/6W	R151	1-249-413-11	CARBON	470 5% 1/6W
R056	1-249-460-11	CARBON	15K 5% 1/4W	R152	1-249-416-11	CARBON	820 5% 1/6W
R068	1-249-405-11	CARBON	100 5% 1/6W	R153	1-249-423-11	CARBON	3.3K 5% 1/6W
R070	1-246-457-00	CARBON	220 5% 1/4W	R154	1-249-433-11	CARBON	22K 5% 1/6W
R071	1-249-447-11	CARBON	1 5% 1/4W F	R155	1-249-429-11	CARBON	10K 5% 1/6W
R100	1-249-428-11	CARBON	8.2K 5% 1/6W	R156	1-249-435-11	CARBON	33K 5% 1/6W
R101	1-249-436-11	CARBON	39K 5% 1/6W	R157	1-249-435-11	CARBON	33K 5% 1/6W

B

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
R158	1-249-439-11	CARBON	68K 5% 1/6W	R218	1-249-429-11	CARBON	10K 5% 1/6W
R159	1-249-415-11	CARBON	680 5% 1/6W	R219	1-249-426-11	CARBON	5.6K 5% 1/6W
R160	1-249-436-11	CARBON	39K 5% 1/6W	R220	1-249-435-11	CARBON	33K 5% 1/6W
R161	1-249-429-11	CARBON	10K 5% 1/6W	R221	1-249-436-11	CARBON	39K 5% 1/6W
R162	1-249-437-11	CARBON	47K 5% 1/6W	R222	1-249-439-11	CARBON	68K 5% 1/6W
R165	1-215-493-00	CARBON	1M 5% 1/6W	R223	1-249-426-11	CARBON	5.6K 5% 1/6W
R167	1-249-419-11	CARBON	1.5K 5% 1/6W	R224	1-247-891-00	CARBON	330K 5% 1/6W
R168	1-249-435-11	CARBON	33K 5% 1/6W	R225	1-249-441-11	CARBON	100K 5% 1/6W
R170	1-249-431-11	CARBON	15K 5% 1/6W	R226	1-215-468-00	CARBON	91K 5% 1/6W
R171	1-249-441-11	CARBON	100K 5% 1/6W	R228	1-249-419-11	CARBON	1.5K 5% 1/6W
R173	1-249-425-11	CARBON	4.7K 5% 1/6W	R230	1-249-425-11	CARBON	4.7K 5% 1/6W
R176	1-247-887-00	CARBON	220K 5% 1/6W	R231	1-249-438-11	CARBON	56K 5% 1/6W
R177	1-249-441-11	CARBON	100K 5% 1/6W	R232	1-249-412-11	CARBON	390 5% 1/6W
R178	1-247-883-00	CARBON	150K 5% 1/6W	R233	1-249-409-11	CARBON	220 5% 1/6W
R179	1-249-439-11	CARBON	68K 5% 1/6W	R234	1-249-409-11	CARBON	220 5% 1/6W
R180	1-249-417-11	CARBON	1K 5% 1/6W	R235	1-249-413-11	CARBON	470 5% 1/6W
R181	1-249-429-11	CARBON	10K 5% 1/6W	R236	1-249-405-11	CARBON	100 5% 1/6W
R182	1-249-437-11	CARBON	47K 5% 1/6W	R237	1-249-409-11	CARBON	220 5% 1/6W
R183	1-249-423-11	CARBON	3.3K 5% 1/6W	R238	1-249-435-11	CARBON	33K 5% 1/6W
R184	1-249-418-11	CARBON	1.2K 5% 1/6W	R239	1-249-440-11	CARBON	82K 5% 1/6W
R185	1-249-440-11	CARBON	82K 5% 1/6W	R240	1-247-838-00	CARBON	2K 5% 1/6W
R186	1-249-413-11	CARBON	470 5% 1/6W	R241	1-249-433-11	CARBON	22K 5% 1/6W
R187	1-249-434-11	CARBON	27K 5% 1/6W	R242	1-215-444-00	CARBON	9.1K 5% 1/6W
R188	1-249-435-11	CARBON	33K 5% 1/6W	R243	1-249-430-11	CARBON	12K 5% 1/6W
R189	1-249-439-11	CARBON	68K 5% 1/6W	R244	1-249-423-11	CARBON	3.3K 5% 1/6W
R190	1-249-435-11	CARBON	33K 5% 1/6W	R245	1-249-426-11	CARBON	5.6K 5% 1/6W
R191	1-249-437-11	CARBON	47K 5% 1/6W	R246	1-249-429-11	CARBON	10K 5% 1/6W
R192	1-249-421-11	CARBON	2.2K 5% 1/6W	R247	1-249-431-11	CARBON	15K 5% 1/6W
R193	1-249-424-11	CARBON	3.9K 5% 1/6W	R248	1-249-421-11	CARBON	2.2K 5% 1/6W
R194	1-249-431-11	CARBON	15K 5% 1/6W	R249	1-249-437-11	CARBON	47K 5% 1/6W
R195	1-249-421-11	CARBON	2.2K 5% 1/6W	R250	1-247-885-00	CARBON	180K 5% 1/6W
R196	1-249-434-11	CARBON	27K 5% 1/6W	R251	1-249-426-11	CARBON	5.6K 5% 1/6W
R197	1-249-415-11	CARBON	680 5% 1/6W	R252	1-249-428-11	CARBON	8.2K 5% 1/6W
R198	1-249-415-11	CARBON	680 5% 1/6W	R253	1-249-423-11	CARBON	3.3K 5% 1/6W
R199	1-249-417-11	CARBON	1K 5% 1/6W	R254	1-249-429-11	CARBON	10K 5% 1/6W
R200	1-249-441-11	CARBON	100K 5% 1/6W	R255	1-249-417-11	CARBON	1K 5% 1/6W
R201	1-215-493-00	CARBON	1M 5% 1/6W	R256	1-249-428-11	CARBON	8.2K 5% 1/6W
R202	1-215-493-00	CARBON	1M 5% 1/6W	R258	1-249-421-11	CARBON	2.2K 5% 1/6W
R203	1-249-429-11	CARBON	10K 5% 1/6W	R259	1-249-428-11	CARBON	8.2K 5% 1/6W
R204	1-249-429-11	CARBON	10K 5% 1/6W	R260	1-249-439-11	CARBON	68K 5% 1/6W
R205	1-249-429-11	CARBON	10K 5% 1/6W	R261	1-249-429-11	CARBON	10K 5% 1/6W
R206	1-249-439-11	CARBON	68K 5% 1/6W	R262	1-249-441-11	CARBON	100K 5% 1/6W
R207	1-249-409-11	CARBON	220 5% 1/6W	R263	1-249-429-11	CARBON	10K 5% 1/6W
R208	1-249-429-11	CARBON	10K 5% 1/6W	R264	1-249-439-11	CARBON	68K 5% 1/6W
R209	1-249-435-11	CARBON	33K 5% 1/6W	R265	1-249-429-11	CARBON	10K 5% 1/6W
R210	1-249-409-11	CARBON	220 5% 1/6W	R266	1-249-429-11	CARBON	10K 5% 1/6W
R211	1-249-409-11	CARBON	220 5% 1/6W	R267	1-249-433-11	CARBON	22K 5% 1/6W
R212	1-249-424-11	CARBON	3.9K 5% 1/6W	R268	1-249-439-11	CARBON	68K 5% 1/6W
R213	1-249-409-11	CARBON	220 5% 1/6W	R269	1-249-429-11	CARBON	10K 5% 1/6W
R214	1-249-409-11	CARBON	220 5% 1/6W	R270	1-249-415-11	CARBON	680 5% 1/6W
R215	1-249-425-11	CARBON	4.7K 5% 1/6W	R271	1-249-469-11	CARBON	100K 5% 1/4W
R216	1-249-441-11	CARBON	100K 5% 1/6W	R272	1-246-517-25	CARBON	68K 5% 1/4W
R217	1-249-441-11	CARBON	100K 5% 1/6W	R273	1-202-463-00	SO_ID	2.2M 10% 1/4W

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel:- 01844-351694 Fax:- 01844-352554  
 Email:- enquiries@mauritron.co.uk

B

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
R274	1-249-465-11	CARBON	47K 5% 1/4W	R337	1-249-439-11	CARBON	68K 5% 1/6W
R275	1-249-429-11	CARBON	10K 5% 1/6W	R338	1-249-429-11	CARBON	10K 5% 1/6W
R276	1-249-431-11	CARBON	15K 5% 1/6W	R339	1-249-421-11	CARBON	2.2K 5% 1/6W
R277	1-249-416-11	CARBON	820 5% 1/6W	R340	1-249-409-11	CARBON	220 5% 1/6W
R278	1-249-426-11	CARBON	5.6K 5% 1/6W	R341	1-249-429-11	CARBON	10K 5% 1/6W
R279	1-247-726-11	CARBON	33K 5% 1/4W	R342	1-249-422-11	CARBON	2.7K 5% 1/6W
R280	1-249-437-11	CARBON	47K 5% 1/6W	R343	1-249-417-11	CARBON	1K 5% 1/6W
R281	1-249-431-11	CARBON	15K 5% 1/6W	R344	1-249-417-11	CARBON	1K 5% 1/6W
R282	1-249-421-11	CARBON	2.2K 5% 1/8W F	R345	1-249-422-11	CARBON	2.7K 5% 1/6W
R283	1-249-425-11	CARBON	4.7K 5% 1/6W	R346	1-249-422-11	CARBON	2.7K 5% 1/6W
R284	1-249-428-11	CARBON	8.2K 5% 1/6W	R347	1-249-424-11	CARBON	3.9K 5% 1/6W
R285	1-249-423-11	CARBON	3.3K 5% 1/6W	R348	1-249-430-11	CARBON	12K 5% 1/6W
R286	1-249-423-11	CARBON	3.3K 5% 1/6W	R349	1-249-429-11	CARBON	10K 5% 1/6W
R287	1-215-493-00	CARBON	1M 5% 1/6W	VARIABLE RESISTOR			
R288	1-249-441-11	CARBON	100K 5% 1/6W	RV101	1-226-845-00	RES, ADJ, CARBON	330
R290	1-249-429-11	CARBON	10K 5% 1/6W	RV103	1-226-849-00	RES, ADJ, CARBON	3.3K
R291	1-249-429-11	CARBON	10K 5% 1/6W	RV104	1-226-852-00	RES, ADJ, CARBON	22K
R292	1-249-447-11	CARBON	1 5% 1/4W	RV105	1-226-852-00	RES, ADJ, CARBON	22K
R293	1-249-422-11	CARBON	2.7K 5% 1/6W	RV106	1-226-849-00	RES, ADJ, CARBON	3.3K
R294	1-249-405-11	CARBON	100 5% 1/6W	RV107	1-228-724-00	RES, ADJ, CARBON	10K
R295	1-249-425-11	CARBON	4.7K 5% 1/6W	RV108	1-226-850-00	RES, ADJ, CARBON	4.7K
R296	1-249-469-11	CARBON	100K 5% 1/4W	RV109	1-226-850-00	RES, ADJ, CARBON	4.7K
R297	1-249-437-11	CARBON	47K 5% 1/6W	RV110	1-226-846-00	RES, ADJ, CARBON	470
R298	1-249-437-11	CARBON	47K 5% 1/6W	RV111	1-226-853-00	RES, ADJ, CARBON	47K
R299	1-249-413-11	CARBON	470 5% 1/6W	SWITCH			
R301	1-247-658-00	CARBON	47 5% 1/4W F	S1	1-553-725-00	SWITCH, S.I.D.E	
R302	1-249-437-11	CARBON	47K 5% 1/6W	S2	1-553-725-00	SWITCH, S.I.D.E	
R303	1-249-417-11	CARBON	1K 5% 1/6W	S3	1-553-725-00	SWITCH, S.I.D.E	
R304	1-249-417-11	CARBON	1K 5% 1/6W	TRANSFORMER			
R305	1-249-417-11	CARBON	1K 5% 1/6W	T101	1-408-513-00	COIL (VARIABLE)	
R306	1-247-883-00	CARBON	150K 5% 1/6W	T102	1-409-193-00	COIL 3.58MHZ TRAP	
R307	1-249-411-11	CARBON	330 5% 1/6W	T103	1-409-193-00	COIL 3.58MHZ TRAP	
R308	1-249-434-11	CARBON	27K 5% 1/6W	T104	1-404-081-00	TRANSFORMER, DELAY ADJUST	
R309	1-249-409-11	CARBON	220 5% 1/6W	T201	1-404-146-00	TRANSFORMER	
R310	1-249-423-11	CARBON	3.3K 5% 1/6W	T202	1-408-532-00	COIL, VARIABLE	
R311	1-215-462-00	CARBON	51K 5% 1/6W	T203	1-408-532-00	COIL, VARIABLE	
R312	1-249-421-11	CARBON	2.2K 5% 1/6W	T204	1-408-513-00	COIL (VARIABLE)	
R313	1-249-425-11	CARBON	4.7K 5% 1/6W	THERMISTOR			
R314	1-249-435-11	CARBON	33K 5% 1/6W	TH101	1-800-070-XX	THERMISTOR TH-4700	
R315	1-249-419-11	CARBON	1.5K 5% 1/6W	TH201	1-800-626-00	THERMISTOR	
R316	1-249-419-11	CARBON	1.5K 5% 1/6W	CRYSTAL			
R317	1-247-711-11	CARBON	680 5% 1/4W	X101	1-567-505-11	OSCILLATOR, CRYSTAL	
R318	1-249-408-11	CARBON	180 5% 1/6W	X102	1-567-504-11	OSCILLATOR, CRYSTAL	
R319	1-249-413-11	CARBON	470 5% 1/6W				
R322	1-249-427-11	CARBON	6.8K 5% 1/6W				
R324	1-247-713-11	CARBON	1K 5% 1/4W				
R325	1-249-429-11	CARBON	10K 5% 1/6W				
R326	1-249-424-11	CARBON	3.9K 5% 1/6W				
R328	1-247-838-00	CARBON	2K 5% 1/6W				
R329	1-249-424-11	CARBON	3.9K 5% 1/6W				
R332	1-249-438-11	CARBON	56K 5% 1/6W				
R335	1-249-437-11	CARBON	47K 5% 1/6W				
R336	1-249-433-11	CARBON	22K 5% 1/6W				



Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
*1-612-248-11		H BOARD *****				DIODE	
*4-363-319-01		HOLDER (4 GANG), LED		D311	8-719-102-34	DIODE SG232D	
*4-370-916-01		HOLDER (5 GANG), LED		*****			
		DIODE		*1-612-243-11		F BOARD *****	
D301	8-719-114-34	DIODE SY432D				CAPACITOR	
D302	8-719-114-34	DIODE SY432D		C681	1-136-346-11	MYLAR 0.22MF 20% 300V	
D303	8-719-114-34	DIODE SY432D		C682	1-136-346-11	MYLAR 0.22MF 20% 300V	
D304	8-719-114-34	DIODE SY432D		C683	1-161-738-00	CERAMIC 0.0047MF 20% 400V	
D305	8-719-114-34	DIODE SY432D		C684	1-161-738-00	CERAMIC 0.0047MF 20% 400V	
D306	8-719-100-15	DIODE RD3.0E-B2		C685	1-161-738-00	CERAMIC 0.0047MF 20% 400V	
D307	8-719-114-34	DIODE SY432D		C686	1-161-738-00	CERAMIC 0.0047MF 20% 400V	
D308	8-719-114-34	DIODE SY432D		C687	1-161-738-00	CERAMIC 0.0047MF 20% 400V	
D309	8-719-114-34	DIODE SY432D		C688	1-161-738-00	CERAMIC 0.0047MF 20% 400V	
D310	8-719-114-34	DIODE SY432D		C689	1-125-287-00	ELECT(BLOCK) 430MF 400V	
		TRANSISTOR		C691	1-102-085-00	CERAMIC 0.0047MF 500V	
Q301	8-729-178-54	TRANSISTOR 2SC2785				DIODE	
		RESISTOR		D681	8-719-911-55	DIODE U05G	
R301	1-215-436-00	CARBON 4.3K 5% 1/6W				CONNECTOR	
R302	1-215-458-00	CARBON 36K 5% 1/6W		F1	*1-506-348-XX	6P PLUG	
R303	1-215-442-00	CARBON 7.5K 5% 1/6W		F2	*1-508-765-00	3P PLUG (M)	
R304	1-249-429-11	CARBON 10K 5% 1/6W		F3	*1-508-765-00	3P PLUG (M)	
R305	1-249-417-11	CARBON 1K 5% 1/6W				FUSE	
R306	1-249-417-11	CARBON 1K 5% 1/6W		F601	1-532-237-11	FUSE, TIME-LAG 3.15A/250V	
R307	1-249-417-11	CARBON 1K 5% 1/6W			1-533-087-00	HOLDER, FUSE; F601	
R308	1-249-435-11	CARBON 33K 5% 1/6W				RESISTOR	
R309	1-249-419-11	CARBON 1.5K 5% 1/6W		R681	1-214-947-00	METAL 2.7M 1% 1/2W	
		VARIABLE RESISTOR		R682	1-205-716-00	CEMENTED 100 5% 10W	
RV301	1-228-938-00	RES, VAR, CARBON 20K				TRANSFORMER	
RV302	1-228-936-00	RES, VAR, CARBON 10K		T651	1-421-352-00	TRANSFORMER, FERRITE	
RV303	1-228-938-00	RES, VAR, CARBON 20K		T652	1-421-352-00	TRANSFORMER, FERRITE	
RV304	1-228-938-00	RES, VAR, CARBON 20K				THERMISTOR	
RV305	1-228-937-00	RES, VAR, CARBON 20K		TH601	1-800-820-00	THERMISTOR, POWER	
RV306	1-228-937-00	RES, VAR, CARBON 20K		THP601	1-806-387-00	THERMISTOR (POSITIVE)	
RV307	1-228-938-00	RES, VAR, CARBON 20K		*****			
		SWITCH		*A-1275-050-A		Q BOARD, COMPLETE *****	
S301	1-554-405-00	SWITCH, PUSH (5 KEY)					
S302	1-554-118-00	SWITCH, PUSH (1 KEY)		1-536-843-11		TERMINAL BOARD, INPUT/OUTPUT(B)	
S303	1-554-118-00	SWITCH, PUSH (1 KEY)		4-603-275-00		LOCK, SCREW	
S304	1-554-118-00	SWITCH, PUSH (1 KEY)					
S305	1-554-118-00	SWITCH, PUSH (1 KEY)					
*****							
*1-612-249-11		X BOARD *****					
*4-345-701-00		HOLDER, LED					

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel:- 01844-351694 Fax:- 01844-352554  
 Email:- enquiries@mauritron.co.uk

The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.



Q

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
<u>CAPACITOR</u>				<u>CONNECTOR</u>			
C402	1-123-356-00	ELECT	10MF 20% 25V	CN407	*1-562-243-00	CONNECTOR 25P	
C403	1-102-953-00	CERAMIC	18PF 5% 50V	Q1	*1-560-124-00	PUG, CONNECTOR (2.5MM) 4P	
C405	1-123-380-00	ELECT	1MF 20% 50V	Q2	*1-560-124-00	PUG, CONNECTOR (2.5MM) 4P	
C407	1-123-356-00	ELECT	10MF 20% 25V	Q3	*1-560-224-00	PUG, CONNECTOR (2.5MM) 10P	
C408	1-102-953-00	CERAMIC	18PF 5% 50V	Q4	*1-560-125-00	PUG, CONNECTOR (2.5MM) 5P	
C410	1-123-380-00	ELECT	1MF 20% 50V	Q5	*1-560-126-00	PUG, CONNECTOR (2.5MM) 6P	
C412	1-123-356-00	ELECT	10MF 20% 25V	Q7	*1-560-128-00	PUG, CONNECTOR (2.5MM PITCH)	
C413	1-102-953-00	CERAMIC	18PF 5% 50V	<u>DIODE</u>			
C415	1-123-380-00	ELECT	1MF 20% 50V	D401	8-719-911-19	DIODE 1SS119	
C417	1-123-332-00	ELECT	47MF 20% 25V	D402	8-719-911-19	DIODE 1SS119	
C419	1-106-383-00	MYLAR	0.047MF 10% 100V	D403	8-719-911-19	DIODE 1SS119	
C420	1-123-380-00	ELECT	1MF 20% 50V	D404	8-719-100-38	DIODE RD6.2E-B2	
C422	1-106-383-00	MYLAR	0.047MF 10% 100V	D405	8-719-100-38	DIODE RD6.2E-B2	
C423	1-123-380-00	ELECT	1MF 20% 50V	D406	8-719-100-38	DIODE RD6.2E-B2	
C424	1-123-332-00	ELECT	47MF 20% 25V	D407	8-719-100-38	DIODE RD6.2E-B2	
C426	1-123-234-00	ELECT	10MF 20% 50V	D408	8-719-911-19	DIODE 1SS119	
C428	1-123-234-00	ELECT	10MF 20% 50V	D409	8-719-911-19	DIODE 1SS119	
C430	1-123-234-00	ELECT	10MF 20% 50V	D410	8-719-911-19	DIODE 1SS119	
C432	1-123-332-00	ELECT	47MF 20% 25V	D411	8-719-911-19	DIODE 1SS119	
C433	1-123-356-00	ELECT	10MF 20% 25V	D412	8-719-911-19	DIODE 1SS119	
C434	1-102-773-00	CERAMIC	330PF 5% 50V	D414	8-719-911-19	DIODE 1SS119	
C435	1-123-332-00	ELECT	47MF 20% 25V	D415	8-719-911-19	DIODE 1SS119	
C436	1-101-006-00	CERAMIC	0.047MF 50V	D416	8-719-911-19	DIODE 1SS119	
C437	1-123-234-00	ELECT	10MF 20% 50V	D418	8-719-100-38	DIODE RD6.2E-B2	
C438	1-123-369-00	ELECT	4.7MF 20% 25V	D419	8-719-100-38	DIODE RD6.2E-B2	
C441	1-101-006-00	CERAMIC	0.047MF 50V	D420	8-719-911-19	DIODE 1SS119	
C443	1-106-383-00	MYLAR	0.047MF 10% 100V	D422	8-719-100-38	DIODE RD6.2E-B2	
C444	1-106-367-00	MYLAR	0.01MF 10% 100V	D423	8-719-100-23	DIODE RD4.3E-B2	
C446	1-123-380-00	ELECT	1MF 20% 50V	D424	8-719-911-19	DIODE 1SS119	
C447	1-123-380-00	ELECT	1MF 20% 50V	D425	8-719-100-38	DIODE RD6.2E-B2	
C448	1-123-380-00	ELECT	1MF 20% 50V	D426	8-719-100-38	DIODE RD6.2E-B2	
C452	1-123-382-00	ELECT	3.3MF 20% 50V	D427	8-719-100-38	DIODE RD6.2E-B2	
C453	1-123-228-00	ELECT	1MF 20% 50V	D428	8-719-100-38	DIODE RD6.2E-B2	
C455	1-101-006-00	CERAMIC	0.047MF 50V	D435	8-719-911-19	DIODE 1SS119	
C457	1-102-773-00	CERAMIC	330PF 5% 50V	D436	8-719-911-19	DIODE 1SS119	
C459	1-102-773-00	CERAMIC	330PF 5% 50V	D437	8-719-911-19	DIODE 1SS119	
C461	1-102-773-00	CERAMIC	330PF 5% 50V	<u>FUSE</u>			
C463	1-123-356-00	ELECT	10MF 20% 25V	F402	△ 1-532-078-11	FUSE, TIME-LAG 1A/250V	
C464	1-123-332-00	ELECT	47MF 20% 25V		1-533-087-00	HOLDER, FUSE; F402	
C466	1-123-332-00	ELECT	47MF 20% 25V	F404	△ 1-532-279-11	FUSE, TIME-LAG 0.5A/250V	
C467	1-101-006-00	CERAMIC	0.047MF 50V		1-533-087-00	HOLDER, FUSE; F404	
C468	1-101-006-00	CERAMIC	0.047MF 50V	<u>IC</u>			
C469	1-106-367-00	MYLAR	0.01MF 10% 100V	IC401	8-752-201-90	IC CX22019	
C489	1-123-332-00	ELECT	47MF 20% 25V	IC402	8-759-900-09	IC SN74LS09N	
C490	1-123-332-00	ELECT	47MF 20% 25V	IC403	8-759-901-36	IC SN74LS136N	
C491	1-123-332-00	ELECT	47MF 20% 25V	IC404	8-759-900-08	IC SN74LS08N	
C492	1-123-332-00	ELECT	47MF 20% 25V	IC405	8-759-900-08	IC SN74LS08N	
C493	1-102-766-00	CERAMIC	150PF 5% 50V	IC406	8-759-900-04	IC SN74LS04N	
C494	1-106-367-00	MYLAR	0.01MF 10% 100V				
C495	1-101-006-00	CERAMIC	0.047MF 50V				
C497	1-123-356-00	ELECT	10MF 20% 25V				

The components identified by shading and mark △ are critical for safety. Replace only with part number specified.

Q

Ref.No.	Part No.	Description
IC407	8-759-900-00	IC SN74LS00N
IC408	8-759-900-20	IC SN74LS20N
IC409	8-759-901-38	IC SN74LS138N
REG401	8-759-171-05	IC UPC7805H
REG402	8-759-700-06	IC NJM7812B

COIL

L401	1-408-412-00	MICRO INDUCTOR 18UH
L402	1-408-412-00	MICRO INDUCTOR 18UH
L403	1-408-412-00	MICRO INDUCTOR 18UH
L407	1-408-163-00	MICRO INDUCTOR 5.6MMH

TRANSISTOR

Q401	8-729-117-54	TRANSISTOR 2SA1175
Q402	8-729-178-54	TRANSISTOR 2SC2785
Q403	8-729-117-54	TRANSISTOR 2SA1175
Q404	8-729-178-54	TRANSISTOR 2SC2785
Q405	8-729-117-54	TRANSISTOR 2SA1175
Q406	8-729-178-54	TRANSISTOR 2SC2785
Q407	8-729-117-54	TRANSISTOR 2SA1175
Q408	8-729-117-54	TRANSISTOR 2SA1175
Q409	8-729-178-54	TRANSISTOR 2SC2785
Q410	8-729-117-54	TRANSISTOR 2SA1175
Q411	8-729-178-54	TRANSISTOR 2SC2785
Q412	8-729-178-54	TRANSISTOR 2SC2785
Q413	8-729-178-54	TRANSISTOR 2SC2785
Q414	8-729-117-54	TRANSISTOR 2SA1175
Q415	8-729-178-54	TRANSISTOR 2SC2785
Q416	8-729-178-54	TRANSISTOR 2SC2785
Q417	8-729-178-54	TRANSISTOR 2SC2785
Q418	8-729-117-54	TRANSISTOR 2SA1175
Q419	8-729-178-54	TRANSISTOR 2SC2785
Q420	8-729-178-54	TRANSISTOR 2SC2785
Q421	8-729-178-54	TRANSISTOR 2SC2785
Q422	8-729-178-54	TRANSISTOR 2SC2785
Q423	8-729-178-54	TRANSISTOR 2SC2785
Q424	8-729-117-54	TRANSISTOR 2SA1175
Q425	8-729-178-54	TRANSISTOR 2SC2785
Q426	8-729-178-54	TRANSISTOR 2SC2785
Q429	8-729-178-54	TRANSISTOR 2SC2785
Q430	8-729-117-54	TRANSISTOR 2SA1175
Q431	8-729-178-54	TRANSISTOR 2SC2785
Q433	8-729-117-54	TRANSISTOR 2SA1175
Q434	8-729-117-54	TRANSISTOR 2SA1175
Q435	8-729-117-54	TRANSISTOR 2SA1175
Q442	8-729-178-54	TRANSISTOR 2SC2785
Q443	8-729-178-54	TRANSISTOR 2SC2785
Q444	8-729-178-54	TRANSISTOR 2SC2785
Q445	8-729-117-54	TRANSISTOR 2SA1175
Q446	8-729-117-54	TRANSISTOR 2SA1175
Q447	8-729-178-54	TRANSISTOR 2SC2785
Q448	8-729-117-54	TRANSISTOR 2SA1175
Q449	8-729-178-54	TRANSISTOR 2SC2785

Ref.No.	Part No.	Description	Remark
Q450	8-729-117-54	TRANSISTOR 2SA1175	
Q451	8-729-178-54	TRANSISTOR 2SC2785	
Q452	8-729-117-54	TRANSISTOR 2SA1175	
Q453	8-729-178-54	TRANSISTOR 2SC2785	
Q454	8-729-117-54	TRANSISTOR 2SA1175	
Q455	8-729-178-54	TRANSISTOR 2SC2785	
Q456	8-729-178-54	TRANSISTOR 2SC2785	
Q457	8-729-117-54	TRANSISTOR 2SA1175	

RESISTOR

R351	1-249-429-11	CARBON	10K	5%	1/6W
R352	1-249-409-11	CARBON	220	5%	1/6W
R353	1-249-429-11	CARBON	10K	5%	1/6W
R354	1-249-409-11	CARBON	220	5%	1/6W
R355	1-249-405-11	CARBON	100	5%	1/6W
R356	1-247-711-11	CARBON	680	5%	1/4W
R357	1-247-711-11	CARBON	680	5%	1/4W
R358	1-249-415-11	CARBON	680	5%	1/6W
R359	1-249-415-11	CARBON	680	5%	1/6W
R361	1-247-711-11	CARBON	680	5%	1/4W
R362	1-247-711-11	CARBON	680	5%	1/4W
R364	1-249-415-11	CARBON	680	5%	1/6W
R365	1-247-711-11	CARBON	680	5%	1/4W
R366	1-246-457-00	CARBON	220	5%	1/4W
R367	1-246-457-00	CARBON	220	5%	1/4W
R368	1-249-429-11	CARBON	10K	5%	1/6W
R369	1-249-409-11	CARBON	220	5%	1/6W
R370	1-249-409-11	CARBON	220	5%	1/6W
R371	1-249-423-11	CARBON	3.3K	5%	1/6W
R372	1-247-719-11	CARBON	3.3K	5%	1/4W
R373	1-246-537-00	CARBON	470K	5%	1/4W
R374	1-249-437-11	CARBON	47K	5%	1/6W
R377	1-249-424-11	CARBON	3.9K	5%	1/6W
R378	1-249-429-11	CARBON	10K	5%	1/6W
R379	1-247-711-11	CARBON	680	5%	1/4W
R401	1-247-104-00	CARBON	75	5%	1/4W
R402	1-247-713-11	CARBON	1K	5%	1/4W
R403	1-215-468-00	CARBON	91K	5%	1/6W
R404	1-249-417-11	CARBON	1K	5%	1/6W
R405	1-249-434-11	CARBON	27K	5%	1/6W
R406	1-249-428-11	CARBON	8.2K	5%	1/6W
R407	1-249-417-11	CARBON	1K	5%	1/6W
R408	1-247-104-00	CARBON	75	5%	1/4W
R409	1-247-713-11	CARBON	1K	5%	1/4W
R410	1-215-468-00	CARBON	91K	5%	1/6W
R411	1-249-417-11	CARBON	1K	5%	1/6W
R412	1-249-434-11	CARBON	27K	5%	1/6W
R413	1-249-428-11	CARBON	8.2K	5%	1/6W
R414	1-249-417-11	CARBON	1K	5%	1/6W
R415	1-247-104-00	CARBON	75	5%	1/4W
R416	1-247-713-11	CARBON	1K	5%	1/4W
R417	1-215-468-00	CARBON	91K	5%	1/6W
R418	1-249-417-11	CARBON	1K	5%	1/6W

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel:- 01844-351694 Fax:- 01844-352554  
 Email:- enquiries@mauritron.co.uk

Q

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
R419	1-249-434-11	CARBON	27K 5% 1/6W	R476	1-249-417-11	CARBON	1K 5% 1/6W
R420	1-249-428-11	CARBON	8.2K 5% 1/6W	R477	1-249-425-11	CARBON	4.7K 5% 1/6W
R421	1-249-417-11	CARBON	1K 5% 1/6W	R478	1-249-425-11	CARBON	4.7K 5% 1/6W
R422	1-249-466-11	CARBON	56K 5% 1/4W	R479	1-249-425-11	CARBON	4.7K 5% 1/6W
R423	1-247-885-00	CARBON	180K 5% 1/6W	R480	1-246-445-00	CARBON	68 5% 1/4W
R424	1-249-440-11	CARBON	82K 5% 1/6W	R481	1-247-717-11	CARBON	2.2K 5% 1/4W
R425	1-249-437-11	CARBON	47K 5% 1/6W	R482	1-249-421-11	CARBON	2.2K 5% 1/6W
R426	1-249-427-11	CARBON	6.8K 5% 1/6W	R483	1-249-405-11	CARBON	100 5% 1/6W
R427	1-249-425-11	CARBON	4.7K 5% 1/6W	R484	1-249-429-11	CARBON	10K 5% 1/6W
R428	1-249-466-11	CARBON	56K 5% 1/4W	R485	1-215-468-00	CARBON	91K 5% 1/6W
R429	1-247-885-00	CARBON	180K 5% 1/6W	R486	1-249-434-11	CARBON	27K 5% 1/6W
R430	1-249-440-11	CARBON	82K 5% 1/6W	R487	1-249-428-11	CARBON	8.2K 5% 1/6W
R431	1-249-437-11	CARBON	47K 5% 1/6W	R488	1-246-457-00	CARBON	220 5% 1/4W
R432	1-249-427-11	CARBON	6.8K 5% 1/6W	R489	1-247-721-11	CARBON	4.7K 5% 1/4W
R433	1-249-425-11	CARBON	4.7K 5% 1/6W	R490	1-249-419-11	CARBON	1.5K 5% 1/6W
R434	1-249-405-11	CARBON	100 5% 1/6W	R491	1-249-421-11	CARBON	2.2K 5% 1/6W
R435	1-249-441-11	CARBON	100K 5% 1/6W	R492	1-249-416-11	CARBON	820 5% 1/6W
R436	1-246-445-00	CARBON	68 5% 1/4W	R493	1-249-411-11	CARBON	330 5% 1/6W
R437	1-247-713-11	CARBON	1K 5% 1/4W	R494	1-249-425-11	CARBON	4.7K 5% 1/6W
R438	1-249-421-11	CARBON	2.2K 5% 1/6W	R495	1-249-433-11	CARBON	22K 5% 1/6W
R439	1-247-725-11	CARBON	10K 5% 1/4W	R496	1-249-437-11	CARBON	47K 5% 1/6W
R440	1-215-468-00	CARBON	91K 5% 1/6W	R497	1-249-429-11	CARBON	10K 5% 1/6W
R442	1-249-434-11	CARBON	27K 5% 1/6W	R499	1-249-405-11	CARBON	100 5% 1/6W
R443	1-249-428-11	CARBON	8.2K 5% 1/6W	R1401	1-249-417-11	CARBON	1K 5% 1/6W
R444	1-246-445-00	CARBON	68 5% 1/4W	R1402	1-249-417-11	CARBON	1K 5% 1/6W
R445	1-247-713-11	CARBON	1K 5% 1/4W	R1403	1-249-432-11	CARBON	18K 5% 1/6W
R446	1-249-421-11	CARBON	2.2K 5% 1/6W	R1404	1-249-424-11	CARBON	3.9K 5% 1/6W
R447	1-247-725-11	CARBON	10K 5% 1/4W	R1405	1-249-429-11	CARBON	10K 5% 1/6W
R448	1-215-468-00	CARBON	91K 5% 1/6W	R1406	1-249-417-11	CARBON	1K 5% 1/6W
R450	1-249-434-11	CARBON	27K 5% 1/6W	R1413	1-247-720-11	CARBON	3.9K 5% 1/4W
R451	1-249-428-11	CARBON	8.2K 5% 1/6W	R1414	1-247-708-11	CARBON	470 5% 1/4W
R452	1-246-445-00	CARBON	68 5% 1/4W	R1415	1-247-722-11	CARBON	5.6K 5% 1/4W
R453	1-247-713-11	CARBON	1K 5% 1/4W	R1417	1-249-413-11	CARBON	470 5% 1/6W
R454	1-249-421-11	CARBON	2.2K 5% 1/6W	R1419	1-249-419-11	CARBON	1.5K 5% 1/6W
R455	1-247-725-11	CARBON	10K 5% 1/4W	R1420	1-249-425-11	CARBON	4.7K 5% 1/6W
R456	1-215-468-00	CARBON	91K 5% 1/6W	R1421	1-249-417-11	CARBON	1K 5% 1/6W
R458	1-249-434-11	CARBON	27K 5% 1/6W	R1423	1-249-415-11	CARBON	680 5% 1/6W
R459	1-249-428-11	CARBON	8.2K 5% 1/6W	R1432	1-249-429-11	CARBON	10K 5% 1/6W
R460	1-247-700-11	CARBON	100 5% 1/4W	R1433	1-249-423-11	CARBON	3.3K 5% 1/6W
R461	1-249-421-11	CARBON	2.2K 5% 1/6W	R1434	1-215-438-00	CARBON	5.1K 5% 1/6W
R462	1-249-417-11	CARBON	1K 5% 1/6W	R1435	1-249-418-11	CARBON	1.2K 5% 1/6W
R463	1-249-424-11	CARBON	3.9K 5% 1/6W	R1436	1-249-436-11	CARBON	39K 5% 1/6W
R465	1-249-419-11	CARBON	1.5K 5% 1/6W	R1437	1-249-429-11	CARBON	10K 5% 1/6W
R466	1-249-411-11	CARBON	330 5% 1/6W	R1438	1-249-426-11	CARBON	5.6K 5% 1/6W
R467	1-249-416-11	CARBON	820 5% 1/6W	R1439	1-249-425-11	CARBON	4.7K 5% 1/6W
R468	1-249-419-11	CARBON	1.5K 5% 1/6W	R1441	1-249-433-11	CARBON	22K 5% 1/6W
R469	1-249-411-11	CARBON	330 5% 1/6W	R1442	1-215-491-00	CARBON	820K 5% 1/6W
R470	1-249-416-11	CARBON	820 5% 1/6W	R1443	1-215-491-00	CARBON	820K 5% 1/6W
R471	1-249-419-11	CARBON	1.5K 5% 1/6W	R1444	1-215-491-00	CARBON	820K 5% 1/6W
R472	1-249-411-11	CARBON	330 5% 1/6W	R1445	1-249-435-11	CARBON	33K 5% 1/6W
R473	1-249-416-11	CARBON	820 5% 1/6W	R1446	1-249-435-11	CARBON	33K 5% 1/6W
R474	1-249-425-11	CARBON	4.7K 5% 1/6W	R1447	1-246-527-00	CARBON	180K 5% 1/4W
R475	1-249-428-11	CARBON	8.2K 5% 1/6W	R1448	1-249-426-11	CARBON	5.6K 5% 1/6W

Q	C1
---	----

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
R1449	1-249-421-11	CARBON	2.2K 5% 1/6W	S403	1-553-725-00	SWITCH, S'IDE	
R1451	1-249-417-11	CARBON	1K 5% 1/6W	*****			
R1452	1-249-423-11	CARBON	3.3K 5% 1/6W	*A-1330-507-A C1 BOARD, COMPLETE			
R1453	1-249-417-11	CARBON	1K 5% 1/6W	*****			
R1454	1-249-423-11	CARBON	3.3K 5% 1/6W	1-526-616-00 SOCKET, CRT			
R1455	1-249-421-11	CARBON	2.2K 5% 1/6W	CAPACITOR			
R1456	1-249-413-11	CARBON	470 5% 1/6W	C701	1-123-356-00	E'LECT 10MF 20% 25V	
R1457	1-249-421-11	CARBON	2.2K 5% 1/6W	C702	1-102-002-00	CERAMIC 680PF 10% 500V	
R1458	1-249-401-11	CARBON	47 5% 1/6W	C703	1-123-356-00	E'LECT 10MF 20% 25V	
R1459	1-249-414-11	CARBON	560 5% 1/6W	C704	1-102-002-00	CERAMIC 680PF 10% 500V	
R1460	1-249-397-11	CARBON	22 5% 1/6W	C705	1-123-356-00	E'LECT 10MF 20% 25V	
R1461	1-249-421-11	CARBON	2.2K 5% 1/6W	C706	1-102-002-00	CERAMIC 680PF 10% 500V	
R1462	1-249-413-11	CARBON	470 5% 1/6W	C707	1-123-356-00	E'LECT 10MF 20% 25V	
R1463	1-249-421-11	CARBON	2.2K 5% 1/6W	C708	1-121-759-00	E'LECT 4.7MF 250V	
R1464	1-249-401-11	CARBON	47 5% 1/6W	C709	1-102-038-00	CERAMIC 0.001MF 500V	
R1465	1-249-414-11	CARBON	560 5% 1/6W	C710	1-106-387-00	MYLAR 0.1MF 10% 200V	
R1466	1-249-397-11	CARBON	22 5% 1/6W	C711	1-123-356-00	E'LECT 10MF 20% 50V	
R1467	1-249-421-11	CARBON	2.2K 5% 1/6W	C712	1-129-737-00	FILM 0.047MF 20% 630V	
R1468	1-249-413-11	CARBON	470 5% 1/6W	C713	1-102-249-00	CERAMIC 680PF 20% 2KV	
R1469	1-249-421-11	CARBON	2.2K 5% 1/6W	C714	1-130-491-00	MYLAR 0.047MF 5% 50V	
R1470	1-249-401-11	CARBON	47 5% 1/6W	DIODE			
R1471	1-249-414-11	CARBON	560 5% 1/6W	D701	8-719-300-76	DIODE RH1A	
R1472	1-249-397-11	CARBON	22 5% 1/6W	D702	8-719-300-76	DIODE RH1A	
R1473	1-249-428-11	CARBON	8.2K 5% 1/6W	D703	8-719-300-76	DIODE RH1A	
R1474	1-249-427-11	CARBON	6.8K 5% 1/6W	COIL			
R1475	1-249-429-11	CARBON	10K 5% 1/6W	L701	1-408-418-00	MICRO INDUCTOR 56UH	
R1476	1-249-409-11	CARBON	220 5% 1/6W	L702	1-408-418-00	MICRO INDUCTOR 56UH	
R1477	1-249-409-11	CARBON	220 5% 1/6W	L703	1-408-418-00	MICRO INDUCTOR 56UH	
R1478	1-249-409-11	CARBON	220 5% 1/6W	L704	1-408-417-00	MICRO INDUCTOR 47UH	
R1479	1-249-425-11	CARBON	4.7K 5% 1/6W	L705	1-407-780-00	COIL, SPOCK CHOKE	
R1480	1-249-425-11	CARBON	4.7K 5% 1/6W	L706	1-408-417-00	MICRO INDUCTOR 47UH	
R1481	1-249-417-11	CARBON	1K 5% 1/6W	NEON LAMP			
R1482	1-249-429-11	CARBON	10K 5% 1/6W	N701	1-519-108-XX	LAMP, NEON ASSY	
R1483	1-249-429-11	CARBON	10K 5% 1/6W	TRANSISTOR			
R1484	1-247-725-11	CARBON	10K 5% 1/4W	Q701	8-729-178-54	TRANSISTOR 2SC2785	
R1485	1-246-457-00	CARBON	220 5% 1/4W	Q702	8-729-326-11	TRANSISTOR 2SC2611	
R1486	1-247-725-11	CARBON	10K 5% 1/4W	Q703	8-729-178-54	TRANSISTOR 2SC2785	
R1487	1-246-457-00	CARBON	220 5% 1/4W	Q704	8-729-326-11	TRANSISTOR 2SC2611	
R1488	1-247-725-11	CARBON	10K 5% 1/4W	Q705	8-729-178-54	TRANSISTOR 2SC2785	
R1489	1-246-457-00	CARBON	220 5% 1/4W	Q706	8-729-326-11	TRANSISTOR 2SC2611	
R1490	1-247-725-11	CARBON	10K 5% 1/4W	RESISTOR			
R1492	1-246-457-00	CARBON	220 5% 1/4W	R707	1-249-413-11	CARBON 470 5% 1/6W	
VARIABLE RESISTOR				R708	1-247-793-00	CARBON 27 5% 1/6W	
RV401	1-226-853-00	RES, ADJ, CARBON 47K		R709	1-249-421-11	CARBON 2.2K 5% 1/6W	
RV402	1-226-852-00	RES, ADJ, CARBON 22K					
RV403	1-226-852-00	RES, ADJ, CARBON 22K					
RV404	1-226-852-00	RES, ADJ, CARBON 22K					
RV405	1-226-852-00	RES, ADJ, CARBON 22K					
SWITCH							
S401	1-553-725-00	SWITCH, S'IDE					
S402	1-553-725-00	SWITCH, S'IDE					

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel:- 01844-351694 Fax:- 01844-352554  
 Email:- enquiries@mauritron.co.uk

**C1****C2****D**

Ref.No.	Part.No.	Description	Remark
R710	1-249-409-11	CARBON	220 5% 1/6W
R711	1-249-397-11	CARBON	22 5% 1/6W
R712	1-206-749-00	META' OXIDE	10K 5% 3W F
R713	1-249-413-11	CARBON	470 5% 1/6W
R714	1-247-793-00	CARBON	27 5% 1/6W
R715	1-249-421-11	CARBON	2.2K 5% 1/6W
R716	1-249-409-11	CARBON	220 5% 1/6W
R717	1-249-397-11	CARBON	22 5% 1/6W
R718	1-206-749-00	META' OXIDE	10K 5% 3W F
R719	1-249-413-11	CARBON	470 5% 1/6W
R720	1-247-793-00	CARBON	27 5% 1/6W
R721	1-249-421-11	CARBON	2.2K 5% 1/6W
R722	1-249-409-11	CARBON	220 5% 1/6W
R723	1-249-397-11	CARBON	22 5% 1/6W
R724	1-206-749-00	META' OXIDE	10K 5% 3W F
R725	1-202-824-00	SO'ID	3.3K 1/2W
R726	1-202-824-00	SO'ID	3.3K 1/2W
R727	1-202-824-00	SO'ID	3.3K 1/2W
R728	1-202-549-00	SO'ID	100 10% 1/2W
R729	1-202-837-00	SO'ID	82K 1/2W
R730	1-202-846-00	SO'ID	470K 1/2W
R731	1-202-814-11	SO'ID	33K 1/2W
R732	1-202-815-11	SO'ID	47K 1/2W
R733	1-202-846-00	SO'ID	470K 1/2W
R734	1-202-719-00	SO'ID	1M 10% 1/2W
R735	1-202-842-11	SO'ID	220K 1/2W
R736	1-247-694-11	CARBON	33 5% 1/4W
R737	1-246-525-00	CARBON	150K 5% 1/4W
R738	1-249-399-11	CARBON	33 5% 1/6W
R739	1-202-844-00	SO'ID	330K 1/2W

VARIABLE RESISTOR

RV713	1-226-114-00	RES, ADJ, META' GLAZE 2.2M
RV714	1-226-063-00	RES, ADJ, CARBON 2.2M

SPARK GAP

SG701	1-519-063-XX	DISCHARGING GAP
SG702	1-519-063-XX	DISCHARGING GAP
SG703	1-519-063-XX	DISCHARGING GAP
SG704	1-519-063-XX	DISCHARGING GAP
SG705	1-519-063-XX	DISCHARGING GAP

\*1-612-246-11 C2 BOARD

\*\*\*\*\*

\*1-560-278-00 PLUG, CONNECTOR 8P

RESISTOR

R701	1-249-421-11	CARBON	2.2K 5% 1/6W
R702	1-247-826-00	CARBON	620 5% 1/6W
R703	1-249-421-11	CARBON	2.2K 5% 1/6W
R704	1-249-414-11	CARBON	560 5% 1/6W
R705	1-249-421-11	CARBON	2.2K 5% 1/6W

Remark	Ref.No.	Part No.	Description	Remark		
	R706	1-249-413-11	CARBON	470	5%	1/6W
F		<u>VARIABLE RESISTOR</u>				
	RV701	1-226-819-00	RES, ADJ, CARBON 1K			
	RV702	1-226-819-00	RES, ADJ, CARBON 1K			
	RV703	1-226-921-00	RES, ADJ, CARBON 4.7K			
	RV704	1-226-921-00	RES, ADJ, CARBON 4.7K			
F	RV705	1-226-819-00	RES, ADJ, CARBON 1K			
	RV706	1-226-819-00	RES, ADJ, CARBON 1K			
	RV707	1-226-921-00	RES, ADJ, CARBON 4.7K			
	RV708	1-226-921-00	RES, ADJ, CARBON 4.7K			
	RV709	1-226-819-00	RES, ADJ, CARBON 1K			
	RV710	1-226-819-00	RES, ADJ, CARBON 1K			
F	RV711	1-226-921-00	RES, ADJ, CARBON 4.7K			
	RV712	1-226-921-00	RES, ADJ, CARBON 4.7K			
		<u>SWITCH</u>				
	S701	1-554-974-11	SWITCH, S'IDE			
	*****					
	*A-1345-455-A	D BOARD, COMPLETE				
		*****				
	4-363-414-00	SPACER, MICA				
	*4-367-226-00	HOLDER, H OUT				
	7-685-647-79	SCREW, TAPPING				
		<u>CAPACITOR</u>				
	C501	1-123-381-00	E'LECT	2.2MF	20%	50V
	C502	1-123-369-00	E'LECT	4.7MF	20%	50V
	C503	1-106-343-00	MY'AR	0.001MF	5%	50V
	C504	1-106-347-00	MY'AR	0.0015MF	5%	50V
	C505	1-102-115-00	CERAMIC	560PF	10%	50V
	C506	1-102-973-00	CERAMIC	100PF	5%	50V
	C507	1-106-381-12	MY'AR	0.039MF	10%	100V
	C508	1-123-380-00	E'LECT	1MF	20%	50V
	C509	1-106-367-00	MY'AR	0.01MF	10%	100V
	C510	1-123-382-00	E'LECT	3.3MF	20%	50V
	C511	1-123-379-00	E'LECT	0.47MF	20%	50V
	C512	1-131-373-00	TANTALUM	22MF	20%	16V
	C513	1-136-173-00	FILM	0.47MF	5%	50V
*****	C514	1-131-369-00	TANTALUM	4.7MF	20%	16V
	C515	1-123-356-00	E'LECT	10MF	20%	25V
	C516	1-106-375-12	MY'AR	0.022MF	10%	100V
	C517	1-130-491-00	MY'AR	0.047MF	5%	50V
	C518	1-123-321-00	E'LECT	220MF	20%	16V
	C519	1-102-989-00	CERAMIC	68PF	5%	500V
	C520	1-106-375-12	MY'AR	0.022MF	10%	100V
	C521	1-106-375-12	MY'AR	0.022MF	10%	100V
	C523	1-106-375-12	MY'AR	0.022MF	10%	100V
	C524	1-106-351-00	MY'AR	0.0022MF	5%	100V
	C525	1-129-794-00	FILM	0.0033MF	5%	100V

D

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
C526	1-123-381-00	ELECT	2.2MF 20% 50V	C807	1-123-332-00	ELECT	47MF 20% 16V
C527	1-123-381-00	ELECT	2.2MF 20% 50V	C808	1-123-228-00	ELECT	1MF 20% 50V
C528	1-101-006-00	CERAMIC	0.047MF 50V	C809	1-123-333-00	ELECT	100MF 20% 16V
C531	1-123-381-00	ELECT	2.2MF 20% 50V	C810	1-123-336-00	ELECT	470MF 20% 25V
C532	1-123-334-00	ELECT	220MF 20% 25V	C811	1-101-006-00	CERAMIC	0.047MF 50V
C533	1-123-335-00	ELECT	330MF 20% 25V	C813	1-106-395-00	MYLAR	0.15MF 10% 200V
C534	1-123-379-00	ELECT	0.47MF 20% 50V	C815	1-123-356-00	ELECT	10MF 20% 16V
C535	1-106-383-00	MYLAR	0.047MF 10% 200V	C899	1-101-006-00	CERAMIC	0.047MF 50V
C536	1-101-810-00	CERAMIC	100PF 5% 500V	<u>CONNECTOR</u>			
C537	1-106-343-00	MYLAR	0.001MF 10% 100V	D1	*1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P	
C538	1-161-961-00	CERAMIC	0.0022MF 10% 3KV	D2	*1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P	
C539	1-106-216-00	MYLAR	0.068MF 10% 100V	D3	*1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P	
C540	1-136-139-00	FILM	0.012MF 3% 2KV	D4	*1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P	
C541	1-129-745-00	FILM	0.033MF 10% 400V	D5	*1-508-767-00	5P PLUG	
C542	1-102-223-00	CERAMIC	0.0047MF 10% 2KV	D6	*1-564-038-00	CONNECTOR PLUG, DY (MINI) 6P	
C543	1-123-254-00	ELECT	10MF 250V	D7	*1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)	
C544	1-102-038-00	CERAMIC	0.001MF 500V	D8	*1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P	
C545	1-123-333-00	ELECT	100MF 20% 25V	D9	*1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)	
C546	1-102-038-00	CERAMIC	0.001MF 500V	<u>DIODE</u>			
C547	1-136-111-00	FILM	1MF 5% 200V	D501	8-719-102-60	DIODE RD3.9E-N2	
C548	1-106-387-00	MYLAR	0.1MF 10% 200V	D502	8-719-911-19	DIODE 1SS119	
C549	1-136-113-00	FILM	2MF 5% 200V	D504	8-719-911-19	DIODE 1SS119	
C550	1-129-943-00	FILM	0.68MF 10% 400V	D509	8-719-305-15	DIODE GH3F	
C551A	1-123-332-00	ELECT	47MF 20% 16V	D510	8-719-928-08	DIODE ERD28-08S	
C552A	1-123-332-00	ELECT	47MF 20% 16V	D511	8-719-903-09	DIODE V30N	
C553	1-106-367-00	MYLAR	0.01MF 10% 100V	D512	8-719-918-77	DIODE V19G	
C554	1-123-333-00	ELECT	100MF 20% 25V	D513	8-719-918-77	DIODE V19G	
C555	1-102-228-00	CERAMIC	470PF 10% 500V	D514	8-719-911-55	DIODE U05G	
C556	1-123-360-00	ELECT	100MF 20% 50V	D515	8-719-918-77	DIODE V19G	
C557	1-106-375-12	MYLAR	0.022MF 10% 100V	D516	8-719-911-19	DIODE 1SS119	
C559	1-123-330-00	ELECT	22MF 20% 16V	D517A	8-719-911-55	DIODE U05G	
C560	1-106-379-12	MYLAR	0.033MF 10% 100V	D518A	8-719-911-55	DIODE U05G	
C562	1-123-332-00	ELECT	47MF 20% 16V	D519	8-719-911-55	DIODE U05G	
C563	1-123-332-00	ELECT	47MF 20% 16V	D520	8-719-911-19	DIODE 1SS119	
C566	1-106-343-00	MYLAR	0.001MF 5% 50V	D521	8-719-911-19	DIODE 1SS119	
C567	1-101-006-00	CERAMIC	0.047MF 50V	D524	8-719-911-19	DIODE 1SS119	
C568	1-123-321-00	ELECT	220MF 20% 16V	D525	8-719-102-84	DIODE RD8.2E-N2	
C569	1-106-367-00	MYLAR	0.01MF 10% 100V	D526	8-719-911-19	DIODE 1SS119	
C570	1-106-367-00	MYLAR	0.01MF 10% 100V	D801	8-719-022-21	DIODE 1T-22A	
C571	1-101-006-00	CERAMIC	0.047MF 50V	D802	8-719-022-21	DIODE 1T-22A	
C572	1-101-006-00	CERAMIC	0.047MF 50V	<u>IC</u>			
C573A	1-123-369-00	ELECT	4.7MF 20% 50V	IC501	8-759-100-60	IC UPC1377C	
C573B	1-123-369-00	ELECT	4.7MF 20% 50V	IC502	8-759-979-16	IC CX7916	
C575	1-123-024-00	ELECT	33MF 160V	IC504	8-759-145-58	IC UPC4558C	
C597	1-102-074-00	CERAMIC	0.001MF 10% 50V	IC505	8-759-105-82	IC UPC1378H-P	
C598	1-102-074-00	CERAMIC	0.001MF 10% 50V	IC801	8-759-905-39	IC TDA1082	
C599	1-126-234-11	ELECT	2200MF 20% 16V	IC802	8-759-145-58	IC UPC4558C	
C801	1-123-369-00	ELECT	4.7MF 20% 50V				
C802	1-123-369-00	ELECT	4.7MF 20% 50V				
C803	1-130-489-00	MYLAR	0.033MF 5% 50V				
C804	1-124-192-00	ELECT	4.7MF 20% 50V				
C805	1-106-357-00	MYLAR	0.0039MF 10% 100V				
C806	1-123-380-00	ELECT	1MF 20% 50V				

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel:- 01844-351694 Fax:- 01844-352554  
Email:- enquiries@mauritron.co.uk

D

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
<u>COIL</u>							
1501	1-408-242-00	MICRO INDUCTOR 10MMH		R523	1-249-413-11	CARBON 470 5% 1/6W	
1502	1-407-780-00	COIL, SPOOK CHOKE		R524	1-249-426-11	CARBON 5.6K 5% 1/6W	
1503	1-407-365-00	COIL, CHOKE		R525	1-249-419-11	CARBON 1.5K 5% 1/6W	
1504	1-459-390-00	COIL (WITH CORE)		R526	1-249-427-11	CARBON 6.8K 5% 1/6W	
1505	1-421-368-00	COIL, VAR FERRITE (H.C)		R527	1-249-430-11	CARBON 12K 5% 1/6W	
1506	1-408-239-00	MICRO INDUCTOR 4.7MMH		R528	1-249-425-11	CARBON 4.7K 5% 1/6W	
1507	1-459-104-00	COIL, DUST CORE		R529	1-215-484-00	METAL 430K 1% 1/6W	
1509	1-421-329-00	COIL, CHOKE		R530	1-215-463-00	METAL 56K 1% 1/6W	
1801	1-459-075-00	COIL, DYNAMIC CONVERSION CHOKE		R531	1-249-419-11	CARBON 1.5K 5% 1/6W	
1802	1-459-338-00	COIL, VAR, FERRITE (PAC)		R532	1-246-992-00	CARBON 180 5% 1/8W F	
<u>TRANSISTOR</u>							
Q501	8-729-384-46	TRANSISTOR 2SA844-C		R533	1-249-427-11	CARBON 6.8K 5% 1/8W	
Q502	8-729-178-54	TRANSISTOR 2SC2785		R534	1-249-419-11	CARBON 1.5K 5% 1/6W	
Q503	8-729-900-36	TRANSISTOR DTC124ES		R535	1-215-456-00	METAL 30K 1% 1/6W	
Q504	8-729-900-36	TRANSISTOR DTC124ES		R536	1-249-430-11	CARBON 12K 5% 1/6W	
Q505	8-729-900-36	TRANSISTOR DTC124ES		R537	1-249-441-11	CARBON 100K 5% 1/6W	
Q506	8-729-900-36	TRANSISTOR DTC124ES		R538	1-249-425-11	CARBON 4.7K 5% 1/6W	
Q507	8-729-900-63	TRANSISTOR DTA124ES		R540	1-249-431-11	CARBON 15K 5% 1/6W	
Q508	8-729-168-82	TRANSISTOR 2SC2688		R548	1-249-408-11	CARBON 180 5% 1/6W	
Q509	8-729-800-87	TRANSISTOR 2SD1398		R549	1-246-991-00	CARBON 150 5% 1/8W F	
Q510	8-729-178-54	TRANSISTOR 2SC2785		R550	1-249-429-11	CARBON 10K 5% 1/6W	
Q512	8-729-177-43	TRANSISTOR 2SD774		R551	1-249-406-11	CARBON 120 5% 1/6W	
Q801	8-729-313-42	TRANSISTOR 2SD1134		R552	1-249-429-11	CARBON 10K 5% 1/6W	
Q802	8-729-178-54	TRANSISTOR 2SC2785		R553	1-205-642-00	CEMENTED 3.3K 10% 5W	
Q803	8-729-178-54	TRANSISTOR 2SC2785		R554	1-249-420-11	CARBON 1.8K 5% 1/8W F	
Q804	8-729-117-54	TRANSISTOR 2SA1175		R555	1-249-417-11	CARBON 1K 5% 1/6W	
Q805	8-729-178-54	TRANSISTOR 2SC2785		R556	1-247-636-00	CARBON 0.47 5% 1/8W F	
Q806	8-729-178-54	TRANSISTOR 2SC2785		R557	1-247-636-00	CARBON 0.47 5% 1/8W F	
Q850	8-729-384-46	TRANSISTOR 2SA844-C		R558	1-217-407-00	FUSIBLE 470 1/4W F	
<u>RESISTOR</u>				R559	1-246-979-00	CARBON 1.2 5% 1/8W F	
R501	1-249-419-11	CARBON 1.5K 5% 1/6W		R560	1-202-597-00	SOLED 10K 10% 1/2W	
R502	1-249-410-11	CARBON 270 5% 1/6W		R561	1-249-468-11	CARBON 82K 5% 1/4W	
R503	1-249-413-11	CARBON 470 5% 1/6W		R562	1-249-468-11	CARBON 82K 5% 1/4W	
R504	1-249-417-11	CARBON 1K 5% 1/6W		R563	1-213-141-00	METAL OXIDE 680 5% 1W F	
R505	1-249-429-11	CARBON 10K 5% 1/6W		R564	1-215-862-11	METAL OXIDE 68 5% 1W F	
R506	1-249-421-11	CARBON 2.2K 5% 1/6W		R565	1-212-371-00	METAL OXIDE 8.2 5% 1W F	
R507	1-249-418-11	CARBON 1.2K 5% 1/6W		R566	1-215-479-00	CARBON 270K 5% 1/6W	
R508	1-249-419-11	CARBON 1.5K 5% 1/6W		R567	1-215-493-00	CARBON 1M 5% 1/6W	
R509	1-249-421-11	CARBON 2.2K 5% 1/6W		R568	1-213-136-00	METAL OXIDE 270 5% 1W F	
R510	1-249-434-11	CARBON 27K 5% 1/6W		R569	1-213-138-00	METAL OXIDE 390 5% 1W F	
R511	1-215-457-00	METAL 33K 1% 1/6W		R570	1-247-743-11	CARBON 220 5% 1/2W	
R512	1-249-440-11	CARBON 82K 5% 1/6W		R571	1-249-433-11	CARBON 22K 5% 1/6W	
R513	1-249-429-11	CARBON 10K 5% 1/6W		R572	1-249-434-11	CARBON 27K 5% 1/6W	
R514	1-214-783-00	METAL 180K 1% 1/4W		R573	1-249-423-11	CARBON 3.3K 5% 1/6W	
R515	1-215-463-00	METAL 56K 1% 1/6W		R574	1-249-437-11	CARBON 47K 5% 1/6W	
R518	1-215-478-00	METAL 240K 1% 1/6W		R575	1-249-441-11	CARBON 100K 5% 1/6W	
R519	1-215-463-00	METAL 56K 1% 1/6W		R577	1-249-429-11	CARBON 10K 5% 1/6W	
R520	1-249-411-11	CARBON 330 5% 1/6W		R578	1-215-459-00	METAL 39K 1% 1/6W	
R521	1-249-415-11	CARBON 680 5% 1/6W		R579	1-215-475-00	METAL 180K 1% 1/6W	
R522	1-249-415-11	CARBON 680 5% 1/6W		R580	1-247-718-11	CARBON 2.7K 5% 1/4W	
				R581	1-247-718-11	CARBON 2.7K 5% 1/4W	
				R582	1-249-418-11	CARBON 1.2K 5% 1/6W	
				R583	1-249-417-11	CARBON 1K 5% 1/6W	
				R584	1-249-439-11	CARBON 68K 5% 1/6W	

D	GA
---	----

Ref.No.	Part No.	Description				Remark	Ref.No.	Part No.	Description			Remark
R585	1-249-438-11	CARBON	56K	5%	1/6W				VARIABLE RESISTOR			
R586	1-215-493-00	METAL	1M	1%	1/6W							
R587	1-249-429-11	CARBON	10K	5%	1/6W		RV501	1-228-577-00	RES, ADJ, CARBON 220			
R588	1-249-440-11	CARBON	82K	5%	1/6W		RV502	1-226-850-00	RES, ADJ, CARBON 4.7K			
R589	1-249-440-11	CARBON	82K	5%	1/6W		RV503	1-228-724-00	RES, ADJ, CARBON 10K			
							RV504	1-228-160-11	RES, ADJ, METAL GLAZE 5K			
							RV505	1-222-344-00	RES, ADJ, CARBON 5K			
R596	1-212-373-00	METAL OXIDE	12	5%	1W	F						
R597	1-215-373-31	METAL	10	1%	1/6W							
R598	1-249-429-11	CARBON	10K	5%	1/6W		RV506	1-223-102-00	RES, ADJ, WIREWOUND 120			
R599	1-249-439-11	CARBON	68K	5%	1/6W		RV507	1-226-854-00	RES, ADJ, CARBON 100K			
R800	1-249-435-11	CARBON	33K	5%	1/6W		RV509	1-224-249-XX	RES, ADJ, METAL GLAZE 1K			
							RV801	1-228-724-00	RES, ADJ, CARBON 10K			
R802	1-249-433-11	CARBON	22K	5%	1/6W		RV802	1-226-847-00	RES, ADJ, CARBON 1K			
R803	1-246-991-00	CARBON	150	5%	1/8W	F						
R805	1-249-409-11	CARBON	220	5%	1/6W		RV803	1-226-847-00	RES, ADJ, CARBON 1K			
R806	1-249-439-11	CARBON	68K	5%	1/6W		RV804	1-228-725-00	RES, ADJ, CARBON 22K			
R807	1-249-432-11	CARBON	18K	5%	1/6W		RV805	1-228-725-00	RES, ADJ, CARBON 22K			
							RV806	1-228-725-00	RES, ADJ, CARBON 22K			
R809	1-249-435-11	CARBON	33K	5%	1/6W		RV807	1-228-725-00	RES, ADJ, CARBON 22K			
R810	1-249-424-11	CARBON	3.9K	5%	1/6W							
R811	1-249-435-11	CARBON	33K	5%	1/6W		RV808	1-226-855-00	RES, ADJ, CARBON 220K			
R812	1-249-433-11	CARBON	22K	5%	1/6W		RV809	1-226-857-00	RES, ADJ, CARBON 470K			
R813	1-249-424-11	CARBON	3.9K	5%	1/6W							
									SPARK GAP			
R814	1-249-436-11	CARBON	39K	5%	1/6W		SG501	1-519-063-XX	DISCHARGING GAP			
R815	1-249-434-11	CARBON	27K	5%	1/6W							
R816	1-249-417-11	CARBON	1K	5%	1/6W				TRANSFORMER			
R817	1-249-417-11	CARBON	1K	5%	1/6W							
R818	1-249-433-11	CARBON	22K	5%	1/6W							
							T501	1-437-078-00	TRANSFORMER, HORIZONTAL DRIVE			
R820	1-249-416-11	CARBON	820	5%	1/6W		T503	1-421-520-00	TRANSFORMER, FERRITE (PHT)			
R821	1-249-411-11	CARBON	330	5%	1/6W		T801	1-421-245-11	TRANSFORMER, PZN CUSHION			
R822	1-249-435-11	CARBON	33K	5%	1/6W							
R823	1-249-427-11	CARBON	6.8K	5%	1/6W				THERMISTOR			
R825	1-212-363-00	METAL OXIDE	1.8	5%	1W	F						
							TH802	1-806-213-00	THERMISTOR			
R828	1-249-425-11	CARBON	4.7K	5%	1/6W		TH803	1-800-626-00	THERMISTOR			
R829	1-249-429-11	CARBON	10K	5%	1/6W							
R830	1-249-429-11	CARBON	10K	5%	1/6W							
R831	1-249-425-11	CARBON	4.7K	5%	1/6W							
R832	1-249-429-11	CARBON	10K	5%	1/6W							
R833	1-249-429-11	CARBON	10K	5%	1/6W							
R834	1-249-437-11	CARBON	47K	5%	1/6W							
R835	1-249-437-11	CARBON	47K	5%	1/6W							
R836	1-249-425-11	CARBON	4.7K	5%	1/6W							
R837	1-249-417-11	CARBON	1K	5%	1/6W							
R838	1-215-866-11	METAL OXIDE	330	5%	1W	F						
R839	1-215-866-11	METAL OXIDE	330	5%	1W	F						
R840	1-249-429-11	CARBON	10K	5%	1/6W							
R841	1-247-757-11	CARBON	2.7K	5%	1/2W							
R845	1-215-475-00	METAL	180K	1%	1/6W							
R851	1-249-413-11	CARBON	470	5%	1/6W							
R852	1-249-407-11	CARBON	150	5%	1/6W							
R853	1-247-887-00	CARBON	220K	5%	1/6W							
R854	1-249-417-11	CARBON	1K	5%	1/6W							
R855	1-215-430-00	CARBON	2.4K	5%	1/6W							
R856	1-249-417-11	CARBON	1K	5%	1/6W							
R857	1-215-491-00	CARBON	820K	5%	1/6W							
R860	1-249-432-11	CARBON	18K	5%	1/6W							
							</					

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel: 01844-351694 Fax: 01844-352554  
 Email: enquiries@mauritron.co.uk

The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.



GA GB

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
C607	△.1-124-023-51	ELECT	4.7MF	20%	350V	R604 △.1-246-449-25	CARBON 100 5% 1/4W
C610	△.1-161-963-11	CERAMIC	100PF	20%	2KV	R605 △.1-244-921-11	CARBON 100K 5% 1/2W
C611	△.1-161-912-11	CERAMIC	560PF	10%	500V	R606 △.1-246-487-25	CARBON 3.9K 5% 1/4W
C612	△.1-161-912-11	CERAMIC	560PF	10%	500V	R607 △.1-212-946-51	FUSE 3.3 5% 1/2W F
C613	△.1-161-912-11	CERAMIC	560PF	10%	500V	R608 △.1-246-449-25	CARBON 100 5% 1/4W
C614	△.1-161-912-11	CERAMIC	560PF	10%	500V	R609 △.1-244-873-11	CARBON 1K 5% 1/2W
C615	△.1-161-989-11	CERAMIC	2200PF	10%	500V	R610 △.1-246-461-25	CARBON 330 5% 1/4W
C616	△.1-130-516-51	FILM	0.01MF	10%	50V	R611 △.1-246-521-25	CARBON 100K 5% 1/4W
C617	△.1-130-520-51	FILM	0.022MF	1%	50V	R612 △.1-246-497-25	CARBON 10K 5% 1/4W
C618	△.1-123-357-51	ELECT	22MF	20%	50V	R613 △.1-246-482-25	CARBON 2.4K 5% 1/4W
C619	△.1-130-528-51	FILM	0.1MF	10%	50V	R615 △.1-213-151-61	METAL OXIDE FILM 4.7K 5% 1W F
C620	△.1-123-575-51	ELECT	100MF		160V	R616 △.1-246-453-25	CARBON 150 5% 1/4W
C621	△.1-123-349-51	ELECT	1000MF	20%	35V	R617 △.1-246-417-25	CARBON 4.7 5% 1/4W
C622	△.1-123-324-51	ELECT	1000MF	20%	16V	R618 △.1-217-465-21	FUSE 0.47K 10% 1W F
C623	△.1-123-575-51	ELECT	100MF		160V	R619 △.1-217-465-21	FUSE 0.47K 10% 1W F
C624	△.1-123-333-51	ELECT	100MF	20%	25V	R620 △.1-246-418-25	CARBON 5.1 5% 1/4W
C625	△.1-123-333-51	ELECT	100MF	20%	25V		
<u>DIODE</u>				<u>TRANSFORMER</u>			
D601	△.8-719-300-53	DIODE CTU-38S		T601	△.1-447-764-11	TRANSFORMER, CONVERTER	
D602	△.8-719-300-52	DIODE CTU-38R		T602	△.1-437-102-12	TRANSFORMER, DRIVE	
D603	△.8-719-903-02	DIODE ESAC33-02C		T603	△.1-421-460-31	TRANSFORMER, CURRENT	
D604	△.8-719-903-02	DIODE ESAC33-02C		*****			
D605	△.8-719-900-93	DIODE V09C		△.*1-611-903-11	GB BOARD (SWITCHING REGULATOR)		
D606	△.8-719-911-19	DIODE 1SS119		*****			
D607	△.8-719-100-61	DIODE RD11E-B2		<u>CAPACITOR</u>			
D608	△.8-719-100-34	DIODE RD5.6E-B1		C651	△.1-130-528-51	FILM 0.1MF	10% 50V
D609	△.8-719-100-29	DIODE RD5.1E-B1		C652	△.1-130-528-51	FILM 0.1MF	10% 50V
D610	△.8-719-100-29	DIODE RD5.1E-B1		C653	△.1-124-265-51	ELECT 33MF	20% 25V
D611	△.8-719-200-01	DIODE 10E1		C654	△.1-130-027-51	FILM 0.0056MF	5% 50V
D612	△.8-719-100-34	DIODE RD5.6E-B1		C655	△.1-130-512-51	FILM 4700PF	10% 50V
D613	△.8-719-100-34	DIODE RD5.6E-B1		C656	△.1-130-528-51	FILM 0.1MF	10% 50V
D614	△.8-719-200-01	DIODE 10E1		C657	△.1-123-330-51	ELECT 22MF	20% 25V
<u>COIL</u>				<u>CONNECTOR</u>			
L601	△.1-421-606-11	TRANSFORMER, LINE FILTER		CN651△.*1-564-164-11	PIN, CONNECTOR 7P		
L602	△.1-410-052-11	COIL, CHOKE (MAIN)		<u>DIODE</u>			
L603	△.1-410-053-11	COIL, CHOKE		D651	△.8-719-911-19	DIODE 1SS119	
L604	△.1-408-933-11	COIL, CHOKE		D652	△.8-719-911-19	DIODE 1SS119	
L605	△.1-408-933-11	COIL, CHOKE		D653	△.8-719-911-19	DIODE 1SS119	
L606	△.1-408-933-11	COIL, CHOKE		D654	△.8-719-100-34	DIODE RD5.6E-B1	
<u>TRANSISTOR</u>				D655	△.8-719-109-89	DIODE RD5.6ES-B2	
Q601	△.8-729-301-76	TRANSISTOR STR8124-R		<u>IC</u>			
Q602	△.8-729-102-02	TRANSISTOR 2SD1020-J		IC651△.8-759-906-22	IC MB3759PF		
Q603	△.8-729-102-02	TRANSISTOR 2SD1020-J		<u>TRANSISTOR</u>			
Q604	△.8-729-178-52	TRANSISTOR 2SC2785-J		Q651	△.8-729-117-52	TRANSISTOR 2SA1175-J	
Q605	△.8-729-177-42	TRANSISTOR 2SD774-3		Q652	△.8-729-178-52	TRANSISTOR 2SC2785-J	
<u>RESISTOR</u>							
R601	△.1-244-921-11	CARBON	100K	5%	1/2W		
R602	△.1-246-487-25	CARBON	3.9K	5%	1/4W		
R603	△.1-212-946-51	FUSE	3.3	5%	1/2W F		

The components identified by shading and mark △ are critical for safety. Replace only with part number specified.

GB

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
<b>RESISTOR</b>				<b>VARIABLE RESISTOR</b>			
R651	△.1-247-855-41	CARBON	10K 5% 1/6W	RV651	△.1-228-141-11	RES, ADJ, METAL GLAZE 500	
R652	△.1-247-845-41	CARBON	3.9K 5% 1/6W	*****			
R653	△.1-247-862-41	CARBON	20K 5% 1/6W	<b>MISCELLANEOUS</b>			
R654	△.1-247-864-41	CARBON	24K 5% 1/6W	*****			
R655	△.1-247-836-41	CARBON	1.6K 5% 1/6W	△.1-228-482-14	RESISTOR ASSY, HIGH-VOLTAGE		
R656	△.1-247-879-41	CARBON	100K 5% 1/6W	△.1-413-179-11	SWITCHING REGULATOR (TK-09)		
R657	△.1-247-835-41	CARBON	1.5K 5% 1/6W	△.1-451-204-63	DEFLECTION YOKE (SY-1088)		
R658	△.1-247-881-41	CARBON	120K 5% 1/6W	1-452-032-00	MAGNET, DISK; 10MM Ø		
R659	△.1-247-854-41	CARBON	9.1K 5% 1/6W	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM Ø		
R660	△.1-214-777-51	METAL	100K 1% 1/4W	1-452-146-00	BMC MAGNET		
※R661	△.1-214-747-51	METAL	5.6K 1% 1/4W	△.1-452-337-11	NECK ASSY, CRT (NA304)		
※R661	△.1-214-748-51	METAL	6.2K 1% 1/4W	△.1-534-820-13	POWER CORD		
R662	△.1-247-861-41	CARBON	18K 5% 1/6W	1-536-392-XX	L-TYPE TERMINAL STRIP		
R663	△.1-247-852-41	CARBON	7.5K 5% 1/6W	1-543-179-00	CORE, RING		
R664	△.1-247-839-41	CARBON	2.2K 5% 1/6W	L901	△.1-426-087-42	COIL, DEGAUSSING	
R666	△.1-247-831-41	CARBON	1.0K 5% 1/6W	S901	△.1-554-967-12	SWITCH, PUSH (AC POWER) (1 KEY)	
R667	△.1-247-839-41	CARBON	2.2K 5% 1/6W	SP901	1-503-109-00	SPEAKER	
※R669	△.1-214-769-51	METAL	47K 1% 1/4W	T502	△.1-439-322-12	TRANSFORMER ASSY, FLYBACK	
※R669	△.1-214-770-51	METAL	51K 1% 1/4W	V901	△.8-737-251-05	PICTURE TUBE (A49JHT00X)	
※R669	△.1-214-771-51	METAL	56K 1% 1/4W	*****			
※R669	△.1-214-772-51	METAL	62K 1% 1/4W	<b>ACCESSORIES AND PACKING MATERIALS</b>			
※R669	△.1-214-773-51	METAL	68K 1% 1/4W	*****			
※R669	△.1-214-774-51	METAL	75K 1% 1/4W	Part No.	Description	Remark	
※R669	△.1-214-775-51	METAL	82K 1% 1/4W	4-312-246-00	BAG, PROTECTION		
※R669	△.1-214-776-51	METAL	91K 1% 1/4W	4-363-322-01	INDIVIDUAL CARTON		
※R669	△.1-214-777-51	METAL	100K 1% 1/4W	4-370-943-01	CUSHION (UPPER) (ASSY)		
※R669	△.1-214-778-51	METAL	110K 1% 1/4W	4-370-944-01	CUSHION (LOWER) (ASSY)		
※R669	△.1-214-779-51	METAL	120K 1% 1/4W	4-370-956-01	CUSHION (LOWER INNER)		
※R669	△.1-214-780-51	METAL	130K 1% 1/4W	4-493-915-11	MANUAL, INSTRUCTION		
※R669	△.1-214-781-51	METAL	150K 1% 1/4W				
※R669	△.1-214-782-51	METAL	160K 1% 1/4W				
※R669	△.1-214-783-51	METAL	180K 1% 1/4W				
※R669	△.1-214-784-51	METAL	200K 1% 1/4W				
※R669	△.1-214-785-51	METAL	220K 1% 1/4W				
※R669	△.1-214-786-51	METAL	240K 1% 1/4W				
※R669	△.1-214-787-51	METAL	270K 1% 1/4W				
※R669	△.1-214-788-51	METAL	300K 1% 1/4W				
※R669	△.1-214-952-51	METAL	330K 1% 1/4W				
※R669	△.1-214-953-51	METAL	360K 1% 1/4W				
※R669	△.1-214-954-51	METAL	390K 1% 1/4W				
※R669	△.1-214-955-51	METAL	430K 1% 1/4W				
※R669	△.1-214-956-51	METAL	470K 1% 1/4W				
※R669	△.1-214-957-51	METAL	510K 1% 1/4W				
※R669	△.1-214-958-51	METAL	560K 1% 1/4W				
※R669	△.1-214-959-51	METAL	620K 1% 1/4W				
※R669	△.1-214-960-51	METAL	680K 1% 1/4W				
※R669	△.1-214-961-51	METAL	750K 1% 1/4W				
※R669	△.1-214-962-51	METAL	820K 1% 1/4W				
※R669	△.1-214-963-51	METAL	910K 1% 1/4W				
※R669	△.1-214-964-51	METAL	1M 1% 1/4W				

For Service Manuals Contact  
**MAURITRON TECHNICAL SERVICES**  
 8 Cherry Tree Rd, Chinnor  
 Oxon OX9 4QY  
 Tel:- 01844-351694 Fax:- 01844-352554  
 Email:- enquiries@mauratron.co.uk

The components identified by shading and mark △ are critical for safety. Replace only with part number specified.

• ※ : Selected to yield optimum performance.

